NOTICE TO BIDDERS, SPECIFICATIONS, CONTRACT AND CONTRACT BOND

FOR
HIGHWAY IMPROVEMENT
County of Cook, Illinois

Toni Preckwinkle
Cook County Board President

John Yonan, P.E.
Superintendent
Cook County Department of Transportation and Highways

Shannon E. Andrews
Chief Procurement Officer

Letting: March 12, 2014

Kedzie Avenue – 139th Street to 135th Street
and
139th Street – Kedzie Avenue to Utica Avenue
13-W4612-09-LS
Route No. W46
Section: 13-W4612-07-LS
FEDERAL PROJECT NO.: TE-HPP-1375(002)
FEDERAL JOB NO.: C-91-288-13
COOK COUNTY PROCUREMENT CONTRACT NO.: 1428-13237

NOTICE TO PROSPECTIVE BIDDERS

The Specifications can be downloaded at http://198.65.148.209/purchasing/public/index.php (follow online instructions to register, if you have not already). When the plans are not included in the bid document, you must download the Plans (Drawings) at ftp://130.94.31.166/ (user name: highway; password ftpt3st)

Pre-Bid Meeting: Tuesday, February 25, 2014
11 a.m.
Cook County Department of Transportation and Highways
69 W. Washington Street, Suite 2260
Chicago, Illinois 60602

APPROVED BY THE BOARD OF COOK COUNTY COMMISSIONERS
JUN 18 2014
COM_____

All questions are due on **Friday, February 28, 2014** no later than 3:00pm Chicago time

Send all questions via e-mails to: cho.ng@cookcountyil.gov

Bid Submitted by:

☑ **Bid Bond** is included ☐ **A Cashier's Check** or a **Certified Check** is Included

Name Landmark Contractors Phone No. 847-669-5421

Address 11916 W. Main St.

City Huntley State IL Zip Code 60142

OFFICE OF THE CHIEF PROCUREMENT OFFICER
SHANNON E. ANDREWS
CHIEF PROCUREMENT OFFICER
118 North Clark Street, Room 1018 • Chicago, Illinois 60602 • (312) 603-5370

TONI PRECKWINKLE
PRESIDENT
Cook County Board of Commissioners

EARLEAN COLLINS
1st District

ROBERT STEELE
2nd District

JERRY BUTLER
3rd District

STANLEY MOORE
4th District

DEBORAH SIMS
5th District

JOAN PATRICIA MURPHY
6th District

JESUS G. GARCIA
7th District

EDWIN REYES
8th District

PETER N. SILVESTRI
9th District

BRIDGET GAINER
10th District

JOHN P. DALEY
11th District

JOHN A. FRITCHEY
12th District

LARRY SUFFREDIN
13th District

GREGG GOSLIN
14th District

TIMOTHY O. SCHNEIDER
15th District

JEFFREY R. TOBOLSKI
16th District

ELIZABETH ANN DOODY GORMAN
17th District

ADDENDUM NO. 1

March 6, 2014

Kedzie Avenue & 139th Street Improvements
For
COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS

Contract No. 1428-13237

To: All Bidders of Record

A. General:

This addendum revises bid documents. This addendum is issued to bidder of record prior to execution of contract, and forms a part of contract documents and modifies previously issued documents. Insofar as previously issued contract documents are inconsistent with modifications indicated by this addendum, modifications indicated by this addendum shall govern. Where any part of the contract documents are modified by this addendum, all unaltered provisions shall remain in effect.

B. Bid Form:

Acknowledge receipt of this addendum in space provided on bid form pages. Failure to do so will subject bidder to disqualification.

C. Changes:

1. **Bid Due Date: Revised to "AT NO LATER THAN 10:00 AM ON MARCH 26, 2014, COOK COUNTY BUILDING, 118 N CLARK ST., 10TH FLOOR, ROOM 1018"**

2. **Bid Opening Date: Revised to " MARCH 26, 2014 AT 10:00 AM"**

ORIGINATED BY:
Cho Ng
Senior Contract Negotiator

SHANNON E. ANDREWS
CHIEF PROCUREMENT OFFICER

TONI PRECKWINKLE
PRESIDENT
Cook County Board of Commissioners

EARLEAN COLLINS
1st District

ROBERT STEELE
2nd District

JERRY BUTLER
3rd District

STANLEY MOORE
4th District

DEBORAH SIMS
5th District

JOAN PATRICIA MURPHY
6th District

JESUS G. GARCIA
7th District

EDWIN REYES
8th District

PETER N. SILVESTRI
9th District

BRIDGET GAINER
10th District

JOHN P. DALEY
11th District

JOHN A. FRITCHEY
12th District

LARRY SUFFREDIN
13th District

GREGG GOSLIN
14th District

TIMOTHY O. SCHNEIDER
15th District

JEFFREY R. TOBOLSKI
16th District

ELIZABETH ANN DOODY GORMAN
17th District

OFFICE OF THE CHIEF PROCUREMENT OFFICER
SHANNON E. ANDREWS
CHIEF PROCUREMENT OFFICER
118 North Clark Street, Room 1018 • Chicago, Illinois 60602 • (312) 603-5370

ADDENDUM NO. 2

March 11, 2014

Kedzie Avenue & 139th Street Improvements
For
COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS

Contract No. 1428-13237

To: All Bidders of Record

A. General:

This addendum revises bid documents. This addendum is issued to bidder of record prior to execution of contract, and forms a part of contract documents and modifies previously issued documents. Insofar as previously issued contract documents are inconsistent with modifications indicated by this addendum, modifications indicated by this addendum shall govern. Where any part of the contract documents are modified by this addendum, all unaltered provisions shall remain in effect.

B. Bid Form:

Acknowledge receipt of this addendum in space provided on bid form pages. Failure to do so will subject bidder to disqualification.

C. Attachments:

The addendum includes attachments described in this addendum. One copy of each attachment is issued with this addendum, unless otherwise indicated. Check receipt of attachments issued with this addendum.

1. Schedule of Prices Page 443R
2. Lighting Plan (2 of 4) E-5

D. Filing:

Insert attachments in respective contract document in correct sequence and location. Revise specification contents to reflect modifications of the addendum, as applicable.

E. Changes:

1. Replace Schedule of Prices page 443 with attachment 1 – Schedule of Prices Page 443R
2. Insert Attachment 2 - Lighting Plan (2 of 4) E-5 into the bid document

ORIGINATED BY:
Cho Ng
Senior Contract Negotiator

SHANNON E. ANDREWS
CHIEF PROCUREMENT OFFICER

Table of Contents

Page No.	Special Provision No.	Description
1	*0 01	Cover Sheet
2		Table of Contents
5		Notice Sheet
6		Special Provision Checklist
16	1	Definition of Terms, Information for Bidders
20	2	Bidding Requirements and Conditions For Contract Proposals
25	3	Pre-Bid Meeting
26	4	Davis Bacon Prevailing Wages
61	7	Required Contract Provisions Federal-Aid Construction Contracts
93	7a	FHWA-1273 Required Contract Provisions Federal Aid Construction Contracts
102	8a	Required Disadvantaged Business Participation (DBE)
115	10	Insurance Requirements
119	11	Railroad Protective Liability Insurance
120	12a	Indemnification for Cook County
121	13	Joint Venture Forms
127	14	Addendum Receipt
128	16	Combination Bidding Process
130	17b	Prompt Pay Mechanisms (Federal Aid)
131	23	Contract Claims
132	24	Pre-Construction Conference
133	25	Mobilization
134	27	Diesel Vehicle Emissions Control (Green Construction Ordinance)
142	28	Processing of Extra Work Payment Requests
143	31	Engineer's Field Office
147	32	Construction Debris
148	33	Clean Construction and Demolition Debris
150	46	Managing Concrete Waste
154	50	Dowel Bars
155	63	Crushed Stone (Temporary Use)
156	71	Scheduling and Landscaping
157	170	Blocking Existing Drains and Sewers
158	185	Cooperation With Utilities
160	185a	Status of Utilities to be Adjusted
162	185b	Buckeye Partners, L.P. Right-of-Way Use Restrictions Specification
182	200	Cleaning Existing Manholes, Catch Basins or Inlets and Cleaning Existing Storm Sewer and Pipe Culverts
183	202	National Pollutant Discharge Elimination System
214	212	Sodding
215	213	Trees To Be Planted
216	215	Planting Woody Plants
218	227	Work Zone Traffic Control Surveillance
219	229	Modified Urethane Pavement Marking (BDE)
227	231	Traffic Protection
233	236	Project Signs Plaque
234	241	Traffic Signal Work General
245	267	Rebuild Existing Handhole, Rebuild Existing Heavy Duty Handhole, Rebuild Existing Double Handhole

Table of Contents

Page No.	Special Provision No.	Description
246	272	Maintenance of Existing Traffic Signal Installation
249	400	Cutting Hot-Mix Asphalt Surface
250	401	Removal and Replacement of Fire Hydrant
251	402	Water Meter Relocation and Meter Box Replacement
252	403	Light Pole Foundation, 24" Diameter, Offset
253	404	Conduit Splice
254	405	Light Pole Foundation, Special
255	406	Maintain Existing Lighting System
258	407	Pavement Exploratory Pothole
260	408	Removal of Decorative Lighting Unit, Salvage
261	409	D-1 District #1 Checklist
268	410	D-1 Electrical Utility Service Connection (ComEd)
269	411	D-1 Fine Aggregate For Hot-Mix Asphalt
270	412	D-1 Friction Surface Aggregate
273	413	D-1 General Electrical Provisions
278	414	D-1 Ground Tire Rubber (GTR) Modified Asphalt Binder
280	415	D-1 HMA Mixture Design Requirements
285	416	D-1 Luminaire
292	417	D-1 Raceway Exposed
296	418	D-1 Underground Raceway
297	419	D-1 Reclaimed Asphalt Pavement and Reclaimed Asphalt Shingles
308	420	D-1 Electric Service Installation
309	421	D-1 Unit Duct
311	422	D-1 Wire and Cable
313	423	D-1 Heat of Hydration Control For Concrete Structures
314	424	BDE Checklist
317	425	BDE Quality Control and Quality Assurance of Concrete Mixtures
318	426	BDE Removal and Disposal of Surplus Materials
319	427	BDE Removal and Disposal of Regulated Substances
323	428	BDE Liquidated Damages
324	429	BDE LRFD Storm Sewer Burial Tables
334	430	BDE Payments to Subcontractors
336	431	BDE Portland Cement Concrete
379	432	BDE Portland Cement Concrete Equipment
380	433	BDE Warm Mix Asphalt
384	434	BDE Hot Mix Asphalt-Density Testing of Longitudinal Joints
386	435	BDE Payrolls and Payroll Records
388	436	BDE Weekly DBE Trucking Reports
389	437	BDE Planting Woody Plants
391	438	Underground Raceways
392	439	Pole Foundation
393	440	Granular Material
394	441	Conduit Encased in Concrete
395	C	Proposal Sheet

Table of Contents

Page No.	Special Provision No.	Description
396	E(DBE)	Economic Disclosure Statement Instructions, IDOT Certificate of Eligibility, IDOT Affidavit of Availability, *DBE Participation Statement, DBE Utilization Plan, Letter of Intent from DBEs, Petition for Reduction/Waiver of DBE Participation Goals, DBE Good Faith Efforts, Contractor Current Certifications, Required Disclosures, Ethics Disclosure Forms, Labor Standards and Prevailing wage Requirements, Title 23 United States Code, Section 313. Buy America, Execution Pages
435	F	Surety's Statement Of Qualification for Bonding
436	G1	Trust Agreement
439	H	Performance and Payment of Bond Form
440	I	Contract
443	J	Schedule of Prices Sheets
447	K	Proposal Bid Bond
448	L	Bid Deposit Form

COUNTY OF COOK

CHICAGO, ILLINOIS
NOTICE

TO CONTRACTORS FOR A COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS IMPROVEMENT

Notice is hereby given that sealed bids for a Department of Transportation and Highways Improvement in the County of Cook, Illinois, will be received at Room 1018, County Building, and 118 North Clark Street, Chicago, Illinois until 10:00 a.m. Wednesday, March 12, 2014 and then publicly opened and read aloud as described below:

Improvement **Kedzie Avenue** From: **139th Street** To: **135th Street**

and

Improvement **139th Street** From: **Kedzie Avenue** To: **Utica Avenue**

Township **Bremen** Route **W46** Section: **13-W4612-07-LS**

Federal Project ID: TE-HPP-1375(002) Federal Job No.: C-91-288-13

Cook County Purchasing Contract No.: **1428-13237**

LOCATION OF IMPROVEMENT

The proposed improvement is part of the public highway system in the County of Cook, State of Illinois, located by section and route before mentioned, and is indicated on the map showing the County Highway System on file in the office of the County Clerk and also in the office of the Illinois Department of Transportation, Division of Highways, Springfield, Illinois.

DESCRIPTION OF IMPROVEMENT

This project includes construction and installation of parkway enhancements, street lighting, sidewalks, ADA ramps, minor drainage improvements, crosswalk and intersection pavement markings and landscaping along Kedzie Avenue from Station 99+00 to Station 128+00, 139th Street from Station 201+00 to 310+00 and approximately 200 feet west of the centerline of Utica Avenue from Station 310+00 to Station 312+00. No additional right-of-way or easement will be required. The existing 5-lane cross section on Kedzie Avenue and 2-lane cross section on 139th Street will be maintained.

COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
SPECIAL PROVISION CHECK LIST
EFFECTIVE April 4, 2013 V 2013.1
KEDZIE AVENUE - 139TH STREET TO 135TH STREET
139th STREET – KEDZIE AVENUE TO UTICA AVENUE
Section: 13-W4612-07-LS

	No.	Description	Origin and Date Last Revised
X	1	DBE Definition of Terms, Information for Bidders	(CC) Sept. 19, 2013
	1a	MBE WBE Definition of Terms, Information for Bidders	(CC)Sept. 19, 2013
X	2	Bidding Requirements and Conditions For Contract Proposals	(IL-CC) Jan. 15, 2013
X	3	* Pre-Bid Meeting	(CC) Jan. 15, 2013
X	4	* Wages of Employees on Public Works	(IL-CC) Dec. 28, 2009
X	4a	The Davis Bacon Act	(FWH) April, 2009
	5	Alternate Proposal/Ordinance	(CC) Dec. 28, 2011
	6	Responsible Bidder Requirement (Non-Federal Aid)	(IL-CC) Dec. 28, 2011
X	7	Required Contract Provisions (Federal Aid Only)	(IL-CC) Nov. 5, 2013
X	7a	FHWA 1273 Required Contract Provisions Federal Aid Construction Contracts	(FHWA) 1273 May 1, 2012
X	8a	* Required Disadvantaged Business Participation (DBE)	(IL-CC) July 15, 2013
	8b	*MBE/WBE Business Participation	(CC) Jan. 26, 2012
	9	Specific Equal Employment Opportunity Responsibilities (Non-Federal Aid)	(IL-CC) Jan. 15, 2013
X	10	Insurance Requirements	(CC) Dec. 26, 2013
	10a	Township Insurance Requirements	(CC) Jan. 15, 2013
X	11	* Railroad Protective Liability Insurance	(IL-CC) Oct. 8, 2013
X	12a	Indemnification for Cook County	(CC) Dec. 28, 2011
	12b	Indemnification (Locals)	(CC) Jan. 23, 2012
X	13	Joint Venture Forms	(CC) Jan. 15, 2013
X	14	Addendum Receipt	(CC) Dec. 28, 2009
	15	ARRA Provisions	(IL) Current
	16	* Combination Bidding Process	(IL-CC) Jan. 15, 2013
	17a	Prompt Pay Mechanisms (Non-Federal Aid)	(CC) Jan. 15, 2013
X	17b	Prompt Pay Mechanisms (Federal Aid)	
	18-22	Not Used	
X	23	Contract Claims	(IL-CC) Jan. 15, 2013
X	24	Pre-Construction Conference	(CC) Mar. 18, 1980
X	25	Mobilization	(CC) Oct. 20, 2009
	26	Contract Extra Work	(CC) Dec. 24, 2012
X	27	Construction Air Quality Diesel Vehicle Emissions Control (Green Construction Ordinance)	(CC) Jan. 15, 2013
X	28	Processing of Extra Work Payment Requests	(CC) Dec. 24, 2012
	29	Construction Layout Stakes and Survey Control Points	(CC) Jan. 15, 2013

	No.	Description	Origin and Date Last Revised
	30	* Municipal Coordination/Transfer of Jurisdiction and/or Maintenance	(CC) Jan. 15, 2013
X	31	Engineer's Field Office	(CC) Jan. 15, 2013
X	32	Construction Debris	(CC) July 1, 2006
X	33	*Clean Construction and Demolition Debris	(CC) Jan. 15, 2013
	34-44	Not Used	
	45	Portland Cement Concrete Pavement	(CC) July 1, 2012
X	46	Managing Concrete Waste	(CC) Jan. 1, 2009
	47	Class B Patches, Special	(CC) Jan. 1, 2008
	48	Class C Patches, Special	(CC) Jan. 1, 2008
	49	Pavement Removal and Replacement (10Inch)	(CC) Jan. 1, 2008
X	50	Dowel Bars	(CC) Jan. 1, 2008
	51	Structural Fiber Reinforced P.C. Concrete Bus Pad (4 Inch)	(CC) Jan. 1, 2008
	52	P.C.C. Bonded Overlay (4 Inch)	(CC) Jan. 1, 2007
	53	Diamond Grinding Concrete Pavement	(CC) Jan. 15, 2013
	54	Saw Cutting Concrete Overlay	(CC) Jan. 1, 2007
	55	Crack Routing and Sealing	(IL-CC) Jan. 1, 2008
	56	Hot-Mix Asphalt Surface Course, Rubber Modified	(CC) Jan. 1, 2008
	57	Rubberized Asphalt Material	(CC) Jan. 1, 2008
	58	Pavement Thickness Deficiency	(CC) Mar. 1, 2008
	59	Survey Monuments	(CC) Jan. 15, 2013
	60	Soils Information	(CC) Jan. 15, 2013
	61	Stockpiled Embankment	(CC) July 1, 2012
	62	Borrow Excavation	(CC) July 1, 2000
X	63	Crushed Stone (Temporary Use)	(CC) Jan. 1, 2008
	64	Aggregate Subgrade, (12 INCH)	(IL) Current
	65	Expanded Polystyrene Fill	(CC) Jan. 15, 2013
	66	Cellular Concrete Fill	(CC) July 1, 2006
	67	GEO-GRID Subgrade Reinforcing Mat	(CC) May 1, 2003
	68	Earth Excavation (Special)	(CC) Jan. 15, 2013
	69	P.C.C. Surface Finish	(CC) April 7, 2010
	70	Traffic Barrier Terminal, Type 1, Special	(IL-CC) Jan. 1, 2008
X	71	*Scheduling and Landscaping	(CC) Jan. 1, 2008
	72	Cutting Hot-Mix Asphalt Surface	(CC) Jan. 1, 2008
	73	Hot-Mix- Asphalt Driveway Surface Removal	(CC) July 1, 2012
	74	Temporary Butt Joints	(CC) Jan. 1, 2008
	75	Hot-Mix Asphalt Stabilized Sub base	(CC) Jan. 1, 2008
	76	Hot-In-Place Asphalt Recycling by the Heater Scarifying Overlay Method	(CC) July 1, 2011
	77	Treatment of Cracks	(CC) Jan. 1, 2008

No.	Description	Origin and Date Last Revised
78	Strip Reflective Crack Control Treatment, Special	(CC) May 1, 2003
79	Cold Recycled In-Place Bituminous Base Course	(CC) Oct. 1, 2009
80	Temporary By-Pass Pavement (Non-Federal Aid)	(CC) Jan. 1, 2008
81	Temporary By-Pass Pavement (Federal Aid)	(CC) July 1, 2011
82	Reflective Crack Control Treatment	(CC) Jan. 1, 2012
83-116	Not Used	
117	Approach Slab Repair	(IL-CC) Oct. 4, 2011
118	Asbestos Waterproofing Membrane & Asbestos Hot-Mix-Asphalt Surface Removal (BDE)	(IL) Current
119	Not Used	
120	Segmental Concrete Block Walls	(IL) Current
121	Temporary Soil Retention System	(IL) Current
122	Steel Structures	(CC) Nov. 21, 2007
123	Not Used	
124	Cleaning and Painting Existing Steel Structures	(IL) Current
125	Containment and Disposal of Lead Paint Cleaning Residues	(IL) Current
126	Fine or Coarse Aggregate Embankment	(CC) Jan. 12, 2003
127	Strip Seal Joint Assembly with Elastomeric Concrete Headers	(CC) Oct. 3, 2011
128	Drainage System	(IL) Current
129	Grating	(CC) Jan. 15, 2013
130	Silicone Bridge Joint Sealer	(IL) Current
131	Not Used	
132	Deck Slab Repair	(IL) Current
133	Bridge Deck Latex Concrete Overlay	(IL) Current
134	Surface Finish	(IL-CC) Jan. 1, 2007
135-136	Not Used	
137	Welded Wire Fabric, Epoxy Coated	(CC) Nov. 21, 2007
138	Permanent Steel Sheet Piling	(IL) Current
139	Temporary Sheet Piling	(IL) Current
140	Precast Concrete Junction Chambers	(CC) Nov. 1, 2007
141	Jack and Remove Existing Bearings	(IL) Current
142	Jacking Existing Superstructure	(IL) Current
143	Junction Chamber	(CC) Jan. 1, 2007
144	Neoprene Expansion Joint Removal	(CC) Oct. 10, 1995
145	Structural Repair of Concrete	(IL) Current
146	Polymer Modified Portland Cement Mortar	(IL) Current
147	Concrete Wearing Surface for Use With Deck Beams	(IL) Current
148	Sheet Waterproofing Membrane System	(CC) Nov. 19, 1999

	No.	Description	Origin and Date Last Revised
	149	Chain Link Fence (Modified)	(CC) Jan. 1, 2004
	150-155	Not Used	
	156	Storm Sewer, (Ductile Iron Pipe) and Storm Sewers, (Extra Strength Vitrified Clay Pipe) in the City of Chicago	(CC) Oct. 20, 2009
	157	Water Main for Installation in the City of Chicago	(CC) Dec. 21, 2009
	158	Frames, City Electric in the City of Chicago	(CC) July 1, 2012
	159	Lids, City Electric in the City of Chicago	(CC) April 14, 2009
	160	Lids and Lids, ADA Compliant in the City of Chicago	(CC) April 14, 2009
	161	Various City Drainage and Utility Structure Adjustments in the City of Chicago	(CC) Dec. 21, 2009
	162	Storm Sewer Installation in the City of Chicago	(CC) Dec. 1, 2009
	163	Boring and Jacking Storm Sewers, Sanitary Sewers or Water Mains	(CC) Dec. 1, 2007
	164	Storm Sewers Jacked in Place (Over 36 In. Dia.)	(CC) Dec. 21, 2009
	165	Storm Sewer Drilled and Pushed (36 In. Dia. Max.)	(CC) Dec. 1, 2007
	166	Storm Sewers, Abandon and Fill	(CC) Jan. 15, 2013
	167	Storm Sewer to be Televised	(CC) July 1, 2012
	168	Connecting Existing Field Drain Tile	(CC) July 1, 2012
	169	Plugging Existing Drains and Sewers	(CC) Dec. 1, 2007
X	170	Blocking Existing Drains and Sewers	(CC) Dec. 21, 2009
	171	Manholes to be Reconstructed, Special; Catch Basins to be Reconstructed, Special; Valve Vaults to be Reconstructed, Special	(CC) Dec. 1, 2007
	172	Not Used	
	173	Manholes, Type A, with Restrictor Plate, Frames and Lids	(CC) July 1, 2012
	174	Not Used	
	175	Lids and Frames and Lids	(CC) Jan. 15, 2013
	176	Frames and Lids to be Adjusted, Special	(CC) Dec. 21, 2009
	177	Headwall Inlet and Grate	(CC) July 1, 2012
	178	Flared End Sections to be Removed, Flared End Sections to be Relocated	(CC) Dec. 30, 2008
	179	Bracing and Sheeting	(CC) Dec. 1, 2007
	180	Pavement Replacement	(CC) July 1, 2011
	181	Duck Bill Elastomeric Check Valve	(CC) July 1, 2012
	182	Catch Basin Oil and Debris Hoods	(CC) Jan. 15, 2013
	183	Frames and Lids to be Adjusted, Special (Pavement Recycling)	(CC) Jan. 1, 2013
	184	Not Used	
X	185	* Cooperation With Utilities	(CC) Feb. 10, 2012
	186	Water Valve Boxes to be Adjusted and Domestic Meter Vaults to be Adjusted	(CC) Dec. 21, 2009
	187	Domestic Water Service Boxes to be Adjusted	(CC) Dec. 21, 2009
	188	Filling Existing Valve Vaults	(CC) Dec. 21, 2009
	189	Valve Vaults to be Removed	(CC) Dec. 21, 2009

	No.	Description	Origin and Date Last Revised
	190	Water Main Installation	(CC) Dec. 1, 2009
	191	Fire Hydrants Vertical Adjustment	(CC) Dec. 21, 2009
	192	Sanitary Sewer Installation	(CC) July 1, 2012
	193	Sanitary Manholes	(CC) Dec. 21, 2009
	194	Waterproofing of Existing Sanitary Manholes	(CC) July 1, 2012
	195-199	Not Used	
X	200	Cleaning Existing Manholes, Catch Basins or Inlets and Cleaning Existing Storm Sewer and Pipe Culverts	(CC) Dec. 1, 2008
	201	Not Used	
X	202	* National Pollutant Discharge Elimination System	(CC) January 1, 2013
	203	Not Used	
	204	Maintaining Drainage and Stream Protection	(CC) Dec. 1, 2007
	205	Storm Water Pollution Separation System	(CC) July 1, 2012
	206	Storm Water Pollution Separation System (SPECIAL)	(CC) Dec. 1, 2007
	207	Storm Water Pollution Separation System (In-Line)	(CC) July 1, 2012
	208-210	Not Used	
	211	Seeding	(CC) Sept. 1, 2002
X	212	Sodding	(CC) Jan. 15, 2013
X	213	Trees To Be Planted	(CC) Jan. 1, 2013
	214	Salvaging and Transplanting Trees; Salvaging and Transplanting Shrubs	(CC) Sept. 1, 2002
X	215	Planting Woody Plants	(CC) Jan. 1, 1997
	216	Seeding, Fine Fescue Blend	(CC) Jan. 1, 2007
	217	Seeding, Class 4B Modified	(CC) Jan. 1, 2007
	218-226	Not Used	
X	227	Work Zone Traffic Control Surveillance	(IL) Current
	228	Traffic Control Devices – Detour Routing	(CC) July 1, 2012
X	229	Modified Urethane Pavement Marking (BDE)	(IL) Current
	230	Sign Identification Decal	(CC) Jan. 15, 2013
X	231	Traffic Protection	(CC) July 1, 2012
	232-235	Not Used	
X	236	Project Signs Plaque	(CC) Jan. 15, 2013
	237	Eradication of Existing Pavement Marking	(CC) Dec. 1, 2009
	238	Raised Reflective Pavement Marker	(IL-CC) July 1, 2012
	239-240	Not Used	
X	241	Traffic Signal Work General	(ILD1CC) Jan. 15, 2013
	242	Construction at Railroad Crossing	(CC) June 1, 2012
	243	Signal Head, Optically Programmed Signal Head and Pedestrian Signal Head	(CC) June 1, 2012
	244	Light Emitting Diode (LED) Traffic Signal	(ILD1CC) June 1, 2012

	No.	Description	Origin and Date Last Revised
	245	Light Emitting Diode (LED) Pedestrian Countdown Signal Head	(ILD1CC) June 1, 2012
	246	Traffic Signal Backplate	(ILD1CC) June 1, 2012
	247	Illuminated Sign, Light Emitting Diode	(ILD1CC) June 1, 2012
	248	Traffic Signal Post, Pedestrian Pushbutton Post	(ILD1CC) June 1, 2012
	249	Steel Mast Arm Assembly and Pole and/or Steel Combination Mast Arm Assembly and Pole	(ILD1CC) June 1, 2012
	250	Traffic Actuated Controller, Traffic Actuated Controller with Cabinet, Inductive Loop Detector	(ILD1CC) Jan. 15, 2013
	251	Master Controller	(ILD1CC) Jan. 15, 2013
	252	Detector Loop	(ILD1CC) Jan. 15, 2013
	253	Video Detection System For Temporary Traffic Signal Installation	(CC) June 1, 2012
	254	Pedestrian Pushbutton	(ILD1CC) June 1, 2012
	255	Conduit	(IL-CC) June 1, 2012
	256	Coilable Non-Metallic Conduit	(ILD1CC) June 1, 2012
	257	Not used	
	258	Electric Cable	(ILD1CC) June 1, 2012
	259	Railroad Interconnect Cable	(ILD1CC) June 1, 2012
	260	Fiber Optic Cable	(ILD1CC) June 1, 2012
	261	System Ground and Grounding Cable	(ILD1CC) June 1, 2012
	262	Grounding Existing Handhole Frame and Cover	(ILD1) Current
	263	Service Installation, Pole Mounted	(ILD1CC) June 1, 2012
	264	Service Installation, Ground Mounted	(ILD1CC) June 1, 2012
	265	* Electric Service	(CC) Jan. 15, 2013
	266	Handhole	(ILD1CC) June 1, 2012
X	267	Rebuild Existing Handhole, Rebuild Existing Heavy Duty Handhole, Rebuild Existing Double Handhole	(CC) June 1, 2012
	268	Concrete Foundation	(ILD1CC) June 1, 2012
	269	Modify Existing Type "D" Foundation	(CC) June 1, 2012
	270	Remove Existing Traffic Signal Equipment	(ILD1CC) June 1, 2012
	271	Temporary Traffic Signal Installation	(ILD1CC) Jan. 15, 2013
X	272	Maintenance of Existing Traffic Signal Installation	(ILD1CC) June 1, 2012
	273	Emergency Vehicle Priority System	(ILD1CC) June 1, 2012
	274	Relocate Existing Emergency Vehicle Priority System, Detector Unit	(CC) June 1, 2012
	275	Relocate Existing Emergency Vehicle Priority System, Phasing Unit	(CC) June 1, 2012
	276	Confirmation Beacon System	(CC) June 1, 2012
	277	Re-Optimize Traffic Signal System	(ILD1CC) Jan. 15, 2013
	278	Optimize Traffic Signal System	(ILD1CC) Jan. 15, 2013
	279	Median Removal and Replacement	(CC) June 1, 2012
	280	Sidewalk Removal and Replacement	(CC) June 1, 2012

No.	Description	Origin and Date Last Revised
281	Relocate Existing Light Standard and Luminaire Complete in Place	(CC) Jan. 15, 2013
282	Maintenance Of Lighting System	(ILD1CC) June 1, 2012
283	City Electric Manholes to be Adjusted	(CC) June 1, 2012
284	Uninterruptible Power Supply (UPS)	(ILD1CC) June 1, 2012
285	Traffic Signal Cabinet Load Switch	(CC) June 1, 2012
286	Temporary Traffic Signal Timings	(ILD1CC) June 1, 2012
287	Combination Lighting and Traffic Signal Service Installation, Pole Mounted	(CC) June 1, 2012
288	Illuminated Street Name Sign	(ILD1CC) June 1, 2012
289	Relocate Existing Illuminated Street Name Sign	(CC) June 1, 2012
290	Video Detection System, Single Camera Processor Video Detection	(CC) June 1, 2012
291	Video Detection System, Complete Intersection	(CC) June 1, 2012
292	Not Used	
293	Uninterruptible Power Supply Without Cabinet	(CC) June 1, 2012
294	Modifying Existing Controller Cabinet	(ILD1CC) June 1, 2012
295-300	Not Used	

Additional Inserted Special Provisions (As Required)

- Davis Bacon HWY-IL9 Wage Rates Building Heavy, Highway and Residential
- Davis Bacon HWY-IL20 Wage Rates Building Landscape, Heavy Landscape, Highway Landscape and Residential Landscape
- 185a Status of Utilities to be Adjusted
- 185b Buckeye Partners Right-of-Way Use Restrictions Specifications
- 400 Cutting Hot-Mix Asphalt Surface
- 401 Removal and Replacement of Fire Hydrant
- 402 Water Meter Relocation and Meter Box Replacement
- 403 Concrete Foundation, 24" Diameter, Offset
- 404 Conduit Splice
- 405 Light Pole Foundation Special
- 406 Maintain Existing Lighting System
- 407 Pavement Exploratory Pothole
- 408 Removal of Decorative Lighting Unit, Salvage
- 409 District 1 Checklist
- 410 District 1 Electrical Utility Service Connection
- 411 District 1 Fine Aggregate For Hot-Mix Asphalt (HMA)
- 412 District 1 Friction Surface Aggregate
- 413 District 1 General Electrical Provisions
- 414 District 1 Ground Tire Rubber (GTR) Modified Asphalt Binder
- 415 District 1 HMA Mix Design Requirements
- 416 District 1 Luminaire
- 417 District 1 Raceway Exposed
- 418 District 1 Raceway Underground
- 419 District 1 Reclaimed Asphalt Pavement and Reclaimed Asphalt Shingles
- 420 District 1 Electric Service Installation
- 421 District 1 Unit Duct
- 422 District 1 Wire and Cable
- 423 District 1 Heat of Hydration Control For Concrete Structures
- 424 BDE Checklist
- 425 BDE Quality Control\Quality Assurance of Concrete Mixtures
- 426 BDE Removal and Disposal of Surplus Materials
- 427 BDE Removal and Disposal of Regulated Substances
- 428 BDE Liquidated Damages
- 429 BDE LRFD Storm Sewer Burial Tables
- 430 BDE Payment to Subcontractors
- 431 BDE Portland Cement Concrete
- 432 BDE Portland Concrete Equipment
- 433 BDE Warm Mix Asphalt
- 434 BDE Hot Mix Asphalt-Density Testing of Longitudinal Joints
- 435 BDE Payrolls and Payroll Records
- 436 BDE Weekly DBE Trucking Reports
- 437 BDE Planting Woody Plants
- 438 Underground Raceway

- 439 Pole Foundation
- 440 Granular Materials
- 441 Conduit Encased in Concrete

Additional Document Inclusions (Required)

*0 01	Cover Sheet	(CC) Oct. 8, 2013
*0 02	Notice Sheet	(CC) Jan. 15, 2013
*C	Proposal Sheet	(CC) Jan. 1, 2008
*E(DBE)	Economic Disclosure Statement Instructions for Completion of Economic Disclosure Statement, IDOT Certificate of Eligibility, IDOT Affidavit of Availability, DBE Forms, Contractor Current Certifications, Required Disclosures, Ethics Disclosure Forms, Labor Standards & Prevailing Wage Requirements, Title 23 United States Code Section 313 – Buy America, Execution Pages	(CC) Dec. 26, 2013
*E(MWBE)	Economic Disclosure Statement Instructions for Completion of Economic Disclosure Statement, IDOT Certificate of Eligibility, IDOT Affidavit of Availability, MBE/WBE Forms, Contractor Current Certifications, Required Disclosures, Ethics Disclosure Forms, Labor Standards & Prevailing Wage Requirements, Execution Pages	(CC) Dec. 26, 2013
F	Surety's Statement Of Qualification for Bonding	(CC) June 2, 2011
*G1	Trust Agreement	(CC) Jan. 15, 2013
*H	Performance and Payment of Bond Form	(CC) June 9, 2011
*I	Contract	(CC) Jan. 15, 2013
*J	Schedule of Prices Sheets	(CC) Dec. 28, 2011
*K	Proposal Bid Bond	(CC) Jan. 15, 2013
*L	Bid Deposit Form	(CC) Jan. 15, 2013

* Special Provisions marked with an asterisk (*) have information that must be filled in prior to inclusion in the Contract Documents.

Origin of Special Provisions

(CC)	Initiated by Cook County Department of Transportation and Highways
(IL) Current	Initiated by Illinois Department of Transportation
(ILD1) Current	Initiated by Illinois Department of Transportation District 1
(IL-CC)	Initiated by the Illinois Department of Transportation and amended by Cook County Department of Transportation and Highways
(ILD1-CC)	Initiated by Illinois Department of Transportation District 1 and amended by Cook County Department of Transportation and Highways

Initiating Bureau/Division	Cook County Department of Transportation and Highways Special Provision Catalog Number
Contract Documents Office	1-20
Construction Bureau	21-40
Pavement Geometrics Division	41-114

Structural Division	115-155
Drainage Division	156-210
Landscaping Division	211-225
Transportation and Planning Bureau	226-240
Electrical Division	241-300

BY ORDER

BOARD OF COUNTY COMMISSIONERS

THE COUNTY OF COOK

SHANNON E. ANDREWS

CHIEF PROCUREMENT OFFICER

JOHN YONAN, P.E.

SUPERINTENDENT OF DEPARTMENT OF TRANSPORTATION AND HIGHWAYS

DEFINITION OF TERMS

PLANS. The plans herein referred to are those prepared by the County Superintendent of Department of Transportation and Highways. The plans which cover the proposed improvement are designated by the section and route numbers inscribed herein and include all standard and special designs pertaining to the proposed improvement.

SPECIFICATIONS. The specifications herein referred to are the Standard Specifications for Road and Bridge Construction, Supplemental Specifications, the special provisions and all written agreements and documents of any description pertaining to the method or manner of performing the work and the quantity or quality of materials to be furnished under the contract. The Standard Specifications for Road and Bridge Construction are those prepared by the Department of Transportation of the State of Illinois, adopted January 1, 2012. The Supplemental Specifications are those prepared by the Department of Transportation of the State of Illinois.

INTENT OF PLANS AND SPECIFICATIONS. The intent of those plans and specifications is to prescribe a complete outline of the proposed improvement which the Contractor undertakes to construct in full compliance with the contract. In case of discrepancy, plans shall govern over Standard and Supplemental Specifications and Special Provisions shall govern over plans and specifications.

ABOUT REQUESTS FOR PLANS & PROPOSALS

The Specification can be downloaded at http://198.65.148.209/purchasing/bids/listallhighway.php (follow online instructions to register, if you have not already). When the plans are not included in the bid document on the http site, you must also download the Plans (Drawings) at ftp://130.94.31.166/ (user name: highway; password ftpt3st).

A compact disk containing the bid documents will be available at the Cook County Building, 118 North Clark Street, Chicago, IL 60602 at Room 1018. One compact disk per company at no charge.

INFORMATION for BIDDERS

1) If the prospective bidder is in doubt as to the meaning of any part of the plans, specifications of other proposed contract documents, they may submit a written clarification to the Chief Procurement Officer (CPO) for an interpretation thereof. The prospective bidder submitting the request will be responsible for the prompt delivery to the Chief Procurement Officer. Any interpretation of the proposal documents will be made by an addendum duly issued through the Cook County Purchasing website.

2) An estimate of quantities of work to be done and material to be furnished under the specifications will be found in the Schedule of Prices. It is the result of calculations and is given as a basis for a comparison of bids and award of a contract.

3) The bidder should include in the bid price in his bid for any taxes such as Occupational, Social Security, Unemployment Compensation, etc., which he might be required to pay in connection with the construction of the proposed improvement. The County of Cook will not reimburse the Contractor for the payment of any such taxes.

4) The Board of County Commissioners for the County of Cook reserves the right to reject any or all bids and to waive technicalities of form. Bids may be rejected if current work being performed for the County of Cook by the bidder has been unsatisfactory from the standpoint of workmanship or progress, or if the contractor has been awarded work by others subsequent to the issuance of the bid, which may, in the judgement of said Board of County Commissioners of Cook County endanger the prompt completion of the proposed improvement.

5) The bidder shall include in his bid a Bid Guarantee in accordance with provisions contained in the proposal form. The return of the bid guarantee will be in accordance with provisions contained in the bid form.

6) The bidder who submits the bid accepted by said Board of Cook County Commissioners shall execute a contract and furnish a satisfactory Performance and Payment Bond in the amount of one hundred percent (100%) of the contract price within **fourteen (14) days** after receiving notice of acceptance. Such acceptance being contingent upon the fulfillment of this requirement by said bidder. Failure on the part of said bidder to so execute a Contract and Performance and Payment Bond shall be considered just cause for the forfeiture of the bid guaranty as payment of liquidated damages sustained by the County of Cook as the result of such, and the annulment of acceptance of the proposal.

7) If bidder is submitting a bid as a Joint Venture, bidder shall complete the County's Joint Venture Forms and shall submit such Joint Venture Forms **when the bid is submitted**. Bidder is reminded that compliance with the Assumed Business Name Act (805 ILCS 405/1 et seq.) is required of all Joint Ventures.

8) **The following completed documents are to be submitted <u>with the Bid</u>:**

Joint Venture Forms	1 original
Economic Disclosure Statement and Execution Documents:	
IDOT Certificate of Eligibility	1 copy
IDOT Affidavit of Availability	1 copy
DBE Utilization Plan	1 copy
(Note: If original cannot be provided a copy is acceptable.)	
DBE Participation Plan	1 copy
(Note: If original cannot be provided a copy is acceptable.)	
Letter of Intent from DBE to Perform as Subcontractor, Supplier and/or Consultant	1 copy
(Note: If original cannot be provided a copy is acceptable.)	
Current DBE Letter of Certification for each participant	**1 copy**
Petition for Reduction/Waiver of DBE Participation Goals	1 original
Contractor Certifications	1 original
Economic and Other Required Disclosures	1 original
Lobby, Local Business Preference, Real Estate Ownership	1 original
Affidavit of Child Support Obligations	1 original
Disclosure of Ownership Interest Statement	1 original
Familial Relationship Disclosure Provision	1 original
Certification Concerning Labor Standards And Prevailing Wage Requirements	1 original
Subcontractors Certification Concerning Labor Standards and Prevailing Wage Requirements	1 copy
Execution Pages:	
Sole Proprietor Signature Page	6 originals
Partnership and/or Joint Venture Signature Page	6 originals
Corporation Signature Page	6 originals
Bid Deposit Form	1 original
Proposal Bid Bond	1 original
Surety Statement of Qualifications	1 original

The following documents are to be submitted subsequent to notice of acceptance <u>within fourteen (14) calendar days</u>:

Performance and Payment Bond	1 original
Certificates of Insurance evidencing:	
Worker's Compensation and Employer's Liability	1 original
Commercial General Liability	1 original
Commercial Automobile Liability	1 original
Excess Liability Insurance	1 original
Contractor's Pollution Liability	1 original
Railroad Protective Liability (when applicable)	1 original & 1 certified copy
Trust Agreement	1 original

Please forward documents due within fourteen (14) days of notice of acceptance to:

Cook County Department of Transportation and Highways
Contract Documents
69 West Washington Street
Suite 2400
Chicago, IL 60602

SPECIAL PROVISION
FOR
BIDDING REQUIREMENTS AND CONDITIONS FOR CONTRACT PROPOSALS

Qualification of Bidders

The Awarding Authority for contract construction work is the County Board of a County. Each prospective bidder, in evidence of competence, shall furnish the Awarding Authority a certified copy of a "Certificate of Eligibility" issued by the Illinois Department of Transportation, and Contractor's Statement of Experience and Financial Condition" with their bid. Each prospective bidder shall furnish a sworn statement as to equipment owned and controlled, previous experience and construction work.

If the bidder to whom the award is made is a corporation organized under the laws of the State other than Illinois, the bidder shall furnish the Awarding Authority a copy of the corporation's Certificate of Authority to do business in the State of Illinois with the bid.

The bidder must provide the Awarding Authority a sworn Affidavit of Availability showing all uncompleted contracts awarded to them and all low bids pending award for Federal, State, County, Municipal and private work in the bid. The bidder should file two (2) copies of same with IDOT's District office.

Interpretation of Quantities in the Bid Schedule

The quantities appearing in the bid schedule are approximate and are prepared for the comparison of bids. Payment to the Contractor will be made only for the actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased, or omitted as hereinafter provided.

Examination of Plans, Specifications, Special Provisions, and Site of Work

The bidder shall, before submitting a bid, carefully examine the provisions of the contract. The bidder shall inspect in detail the site of the proposed work, investigate and become familiar with all the local conditions affecting the contract and fully acquaint themselves with the detailed requirements of construction. Submission of a bid shall be a conclusive assurance and warranty the bidder has made these examinations and the bidder understands all requirements for the performance of the work. If the submitted bid is accepted, the bidder shall be responsible for all errors in the bid resulting from the bidder's failure or neglect to comply with these instructions. The Awarding Authority will, in no case, be responsible for any costs, expenses, losses, or change in anticipated profits resulting from such failure or neglect of the bidder to make these examinations.

The bidder shall take no advantage of any error or omission in the bid documents and advertised contract. Any prospective bidder who desires an explanation or interpretation of the plans, specification, or any of the contract documents shall request such in writing from the Awarding Authority in sufficient time to allow a written reply by the Awarding Authority that can reach all prospective bidders before the submission of their bids. Any reply given a prospective bidder concerning any of the contract documents, plans, and specifications will be furnished to all prospective bidders in the form determined by the Awarding Authority including, but not limited to, an addendum, if the information is deemed by the Awarding Authority to be necessary in submitting bids or if the Awarding Authority concludes the information would aid competition. Oral explanations, interpretations, or instructions given before the submission of bids unless at a prebid conference will not be binding on the Awarding Authority.

Changes in Improvement

The undersigned agrees that in case the Superintendent of Cook County Department of Transportation and Highways decides either to extend or decrease the area of the proposed improvement or to do both or otherwise alter it by extras or deductions including the elimination of any one or more of the quantities listed in the Schedule of Prices the undersigned will make such change in the contract price by adding or subtracting there from as the case may be by applying the respective unit prices to the quantities of the several items of work that may be involved by reason of such change.

Preparation of the Bid

Bidders shall submit their bids on the form furnished by the Awarding Authority. The bid shall be executed properly, and bids shall be made for all items indicated in the bid form, except when alternate bids are asked, a bid on more than one alternate for each item is not required, unless otherwise provided. The bidder shall indicate in figures, a unit price for each of the separate items called for in the bid form; the bidder shall show the products of the respective quantities and unit prices in the column provided for that purpose, and the gross sum shown in the place indicated in the bid form shall be the summation of said products. All writing shall be with ink or typewriter, except the signature of the bidder which shall be written in ink.

Any erasures or alterations in the unit prices and/or in the products of the respective quantities and unit prices in the bid, must be properly authenticated by the bidder by initialing in ink such erasures or alterations to avoid cause for rejection of the bid in accordance with Title 44 Illinois Administrative Code Chapter IX Section 660.180.

If the bid is made by an individual, that individual's name and business address shall be shown. If made by a firm or partnership, the name and business address of each member of the firm or partnership shall be shown. If made by a corporation, the bid shall show the names, titles, and business addresses of the president, corporate secretary and treasurer. The bid shall be signed by president or someone with authority to execute contracts and attest by the corporate secretary or someone with authority to execute or attest to the execution of contracts.

Rejection of Bids

The Awarding Authority reserves the right to reject any bids for any of the conditions listed below:

a) More than one bid for same work from an individual, firm partnership, or corporation under the same name or different names.

b) Evidence of collusion among bidders.

c) Unbalanced bids in which the bid prices for some items are, in the judgment of the Awarding Authority, out of proportion to the bid prices for other items.

d) If the bid does not contain a unit price for each pay item listed except in the case of authorized alternate pay items or lump sum pay items.

e) If the bid form is other than that furnished by the Awarding Authority; or if the form is altered or any part thereof is detached.

f) If there are omissions, erasures, alterations unauthorized additions, conditional or alternate bids, or irregularities of any kind which may tend to make the bid incomplete, indefinite or ambiguous as to its meaning.

g) If the bidder adds any provisions reserving the right to accept or reject an award, or to enter into a contract pursuant to an award.

h) If the proposal is not accompanied by the proper bid guaranty.

i) If the bid is prepared with other than ink or typewriter, or otherwise fails to meet the requirement of the above "Preparation of Proposal" section.

j) Lack of Competency and adequate machinery, plant, and other equipment, as revealed by the financial statement and experience questionnaires required in the prequalification procedures.

k) Uncompleted work which, in the judgment of the Awarding Authority, might hinder or prevent the prompt completion of additional work awarded.

l) False information provided on a bidder's "Affidavit of Availability".

m) Failure to pay, or satisfactorily settle, all bills due for labor and material on former contracts in force at the time of issuance of bid forms.

n) Failure to comply with any prequalification regulations of the Department.

o) Default under previous contracts.

p) Unsatisfactory performance record as shown by past work for the Awarding Authority, judged from the standpoint of workmanship and progress.

q) When the contractor is suspended from eligibility to bid at a public letting where the contract is awarded by, or requires approval of, the Department.

r) When any agent, servant, or employee of the prospective bidder currently serves as a member, employee, or agent of a governmental body that is financially involved in the proposal work.

s) When any agent, servant, or employee of the perspective bidder has participated in the preparation of plans or specifications for the proposed work.

Bid Guaranty

Each bid shall be accompanied by a bid bond on the Department form contained in the bid document, executed by a corporate surety company satisfactory to the Awarding Authority, by a bank cashier's check or a properly certified check for not less than five percent (5%) of the amount bid, or for the amount specified in the following schedule:

	Amount Bid	Proposal Guaranty
Up to	$5,000	$150
$5,000	$10,000	$300
$10,000	150,000	$1,000
$50,000	$100,00	$3,000
$100,000	$150,000	$5,000
$150,000	$250,000	$7,500
$250,000	$500,000	$12,500
$500,000	$1,000,000	$25,000
$1,000,000	$1,500,000	$50,000
$1,500,000	$2,000,000	$75,000
$2,000,000	$3,000,000	$100,000
$3,000,000	$5,000,000	$150,000
$5,000,000	$7,500,000	$250,000
$7,500,000	$10,000,000	$400,000
$10,000,000	$15,000,000	$500,000
$15,000,000	$20,000,000	$600,000
$20,000,000	$25,000,000	$700,000
$25,000,000	$30,000,000	$800,000
$30,000,000	$35,000,000	$900,000
Over	$35,000,000	$1,000,000

In the event that one proposal guaranty check is intended to cover two or more bids, the amount must equal to the sum of the bid guaranties, which would be required for each individual proposal.

Bank cashier's checks or properly certified checks accompanying bids shall be made payable to the County Treasurer, when a County is the Awarding Authority; or the City, Village, or Town Treasurer, when a city, village or town is the Awarding Authority.

The bid guaranty checks of all except the two (2) lowest responsible bidders will be returned promptly after the bids have been checked, tabulated, and the relation of the bids established. Bid guaranty checks of the two lowest responsible bidders will be returned as soon as the contract and contract bond of the successful bidder have been properly executed and approved. Bid bonds will not be returned.

After a period of three (3) working days has elapsed after the date of opening proposals, the Awarding Authority may permit the two lowest bidders to substitute for the banks cashier's checks or certified checks submitted with their bids as proposal guaranties, bid bonds on the Department forms executed by corporate surety companies satisfactory to the Awarding Authority.

Delivery of Bids

If a special envelope is supplied by the Awarding Authority, each bid should be submitted in that envelope furnished by the Awarding Authority and the blank spaces on the envelope shall be filled in correctly to clearly indicate its contents. When an envelope other than the special one furnished by the Awarding Authority is used, it shall be marked to clearly indicate its contents. When sent by mail, the sealed proposal shall be addressed to the Awarding Authority at the address and in care of the official in whose office the bids are to be received. All bids shall be filed prior to the time and at the place specified in the Notice to Bidders. Bids received after the time specified will be returned to the bidder unopened.

Withdrawal of Bids

Bidder may withdraw their bid prior to bid opening.

Public Opening of Bids

Bids will be opened and read publicly at the time and place specified in the Notice to Bidders. Bidders, their authorized agents, and other interested parties are invited to be present.

Consideration of Bids

After the bids are opened and read, they will be compared on the basis of the summation of the products of the quantities shown in the bid schedule by the unit bid prices. In awarding contracts, the Awarding Authority will, in addition to considering the amounts stated in the bids, take into consideration the responsibility of the various bidders as stated under "Rejection of Bids and documents submitted in the bid and from other investigations which it may elect to make.

The right is reserved to reject any or all bids, to waive technicalities, or to advertise from new bids, if in the judgment of the Awarding Authority, the best interests of the Awarding Authority will be promoted thereby.

Awarding of Contract

The award of contract will be made within 90 calendar days after the opening of bids to the lowest responsible and responsive qualified bidder whose bids complies with all the requirements prescribed. The successful bidder will be notified that their bid has been accepted, and subject to the following conditions, the bidder will be the Contractor. In addition, **the contractor shall provide all required insurance and bonding as specified within fourteen (14) calendar days from notice**.

An approved contract executed by the Awarding Authority is required before the Awarding Authority is bound. An award may be cancelled any time by the Awarding Authority prior to execution in order to protect the public interest and integrity of the bidding process or for any other reason, if the judgment of the Awarding Authority and/or the best interests of the Awarding Authority will be promoted thereby.

If a contract is not awarded within 90 days after the bid opening, bidders may file a written request with the Awarding Authority for the withdrawal of their bid, or agree to maintain their bid price.

Requirement of Contract Bond

The Contractor shall furnish the Awarding Authority a performance and payment bond with good and sufficient sureties in the full amount of the contract within **fourteen (14) calendar days** as part of the requirement. The surety shall be acceptable to the Awarding Authority, shall waive notice of any changes and extensions of time, and shall submit its bond on the form furnished by the Awarding Authority.

Failure to Execute Contract

If the contract is not executed by the Awarding Authority within 90 days from the bid opening, the bidder shall have the right to withdraw their bid without penalty.

Failure of the successful bidder to provide all required insurance and bonding within **fourteen (14) days after the award notification** shall be just cause for the cancellation of the award and the forfeiture of the bid guaranty which shall become the property of the Awarding Authority, not as penalty, but in liquidation of damages sustained. Award may then be made to the next lowest responsible bidder, or the work may be advertised again and constructed under contract, or otherwise, as the Awarding Authority may decide.

SPECIAL PROVISION
FOR
PRE-BID MEETING

Prospective bidders are advised that Pre-Bid Meeting will be held:

Date: **Tuesday, February 25, 2014**
Time: 11 a.m.

Place: Cook County Department of Transportation and Highways
69 W. Washington Street
Suite 2260
Chicago, IL 60602

Wage and Hour Division (WHD)

The Davis-Bacon Act, as Amended

WH Publication 1246
(Revised April 2009) (PDF)

PUBLIC LAW 107-217-AUG. 21, 2002 [as amended [1]]

AN ACT

To revise, codify, and enact without substantive change certain general and permanent laws, related to public buildings, property, and works, as title 40, United States Code, "Public Buildings, Property, and Works".

Be it enacted by the Senate and House of Representatives of the United States of America in Congress assembled,

SECTION 1. TITLE 40, UNITED STATES CODE.

Certain general and permanent laws of the United States, related to public buildings, property, and works, are revised, codified, and enacted as title 40, United States Code, "Public Buildings, Property, and Works", as follows:

TITLE 40-PUBLIC BUILDINGS, PROPERTY, AND WORKS

* * * * *

SUBTITLE II-PUBLIC BUILDINGS AND WORKS

PART A-GENERAL

* * * * *

CHAPTER 31 - GENERAL

* * * * *

SUBCHAPTER IV - WAGE RATE REQUIREMENTS

Sec. 3141. Definitions

In this subchapter, the following definitions apply:

- (1) Federal government.- The term "Federal Government" has the same meaning that the term "United States" had in the Act of March 3, 1931 (ch. 411, 46 Stat. 1494) (known as the Davis-Bacon Act).[2]
- (2) Wages, scale of wages, wage rates, minimum wages, and prevailing wages.- The terms "wages", "scale of wages", "wage rates", "minimum wages", and "prevailing wages" include-
  - (A) the basic hourly rate of pay; and
  - (B) for medical or hospital care, pensions on retirement or death, compensation for injuries or illness resulting from occupational activity, or insurance to provide any of the forgoing, for unemployment benefits, life insurance, disability and sickness insurance, or accident insurance, for vacation and holiday pay, for defraying the costs of apprenticeship or other similar programs, or for other bona fide fringe benefits, but only where the contractor or subcontractor is not required by other federal, state, or local law to provide any of those benefits, the amount of-
    - (i) the rate of contribution irrevocably made by a contractor or subcontractor to a trustee or to a third person under a fund, plan, or program; and
    - (ii) the rate of costs to the contractor or subcontractor that may be reasonably anticipated in providing benefits to laborers and mechanics pursuant to an enforceable commitment to carry out a financially responsible plan or program which was communicated in writing to the laborers and mechanics affected.

Sec. 3142. Rate of wages for laborers and mechanics

- (a) Application.- The advertised specifications for every contract in excess of $2,000, to which the Federal Government or the District of Columbia is a party, for construction, alteration, or repair, including painting and decorating, of public buildings and public works of the Government or the District of Columbia that are located in a State or the District of Columbia

and which requires or involves the employment of mechanics or laborers shall contain a provision stating the minimum wages to be paid various classes of laborers and mechanics.

- (b) Based on Prevailing Wage.- The minimum wages shall be based on the wages the Secretary of Labor determines to be prevailing for the corresponding classes of laborers and mechanics employed on projects of a character similar to the contract work in the civil subdivision of the State in which the work is to be performed, or in the District of Columbia if the work is to be performed there.
- (c) Stipulations Required in Contract.- Every contract based upon the specifications referred to in subsection (a) must contain stipulations that-
  - (1) the contractor or subcontractor shall pay all mechanics and laborers employed directly on the site of the work, unconditionally and at least once a week, and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the advertised specifications, regardless of any contractual relationship which may be alleged to exist between the contractor or subcontractor and the laborers and mechanics;
  - (2) the contractor will post the scale of wages to be paid in a prominent and easily accessible place at the site of the work; and
  - (3) there may be withheld from the contractor so much of accrued payments as the contracting officer considers necessary to pay to laborers and mechanics employed by the contractor or any subcontractor on the work the difference between the rates of wages required by the contract to be paid laborers and mechanics on the work and the rates of wages received by the laborers and mechanics and not refunded to the contractor or subcontractors or their agents.
- (d) Discharge of Obligation.- The obligation of a contractor or subcontractor to make payment in accordance with the prevailing wage determinations of the Secretary of Labor, under this subchapter and other laws incorporating this subchapter by reference, may be discharged by making payments in cash, by making contributions described in section 3141(2)(B)(i) of this title, by assuming an enforceable commitment to bear the costs of a plan or program referred to in section 3141(2)(B)(ii) of this title, or by any combination of payment, contribution, and assumption, where the aggregate of the payments, contributions, and costs is not less than the basic hourly rate of pay plus the amount referred to in section 3141(2)(B) of this title.
- (e) Overtime Pay.- In determining the overtime pay to which a laborer or mechanic is entitled under any federal law, the regular or basic hourly rate of pay (or other alternative rate on which premium rate of overtime compensation is computed) of the laborer or mechanic is deemed to be the rate computed under section 3141(2)(A) of this title, except that where the amount of payments, contributions, or costs incurred with respect to the laborer or mechanic exceeds the applicable prevailing wage, the regular or basic hourly rate of pay (or other alternative rate) is the amount of payments, contributions, or costs actually incurred with respect to the laborer or mechanic minus the greater of the amount of contributions or costs of the types described in section 3141(2)(B) of this title actually incurred with respect to the laborer or mechanic or the amount determined under section 3141(2)(B) of this title but not actually paid.

Sec. 3143. Termination of work on failure to pay agreed wages

Every contract within the scope of this subchapter shall contain a provision that if the contracting officer finds that any laborer or mechanic employed by the contractor or any subcontractor directly on the site of the work covered by the contract has been or is being paid a rate of wages less than the rate of wages required by the contract to be paid, the Federal Government by written notice to the contractor may terminate the contractor's right to proceed with the work or the part of the work as to which there has been a failure to pay the required wages. The Government may have the work completed, by contract or otherwise, and the

contractor and the contractor's sureties shall be liable to the Government for any excess costs the Government incurs.

Sec. 3144. Authority of Comptroller General to pay wages and list contractors violating contracts

- (a) Payment of Wages.-
  - (1) In general.- The Comptroller General shall pay directly to laborers and mechanics from any accrued payments withheld under the terms of a contract any wages found to be due laborers and mechanics under this subchapter.
  - (2) Right of action.- If the accrued payments withheld under the terms of the contract are insufficient to reimburse all the laborers and mechanics who have not been paid the wages required under this subchapter, the laborers and mechanics have the same right to bring a civil action and intervene against the contractor and the contractor's sureties as is conferred by law on persons furnishing labor or materials. In those proceedings it is not a defense that the laborers and mechanics accepted or agreed to accept less than the required rate of wages or voluntarily made refunds.
- (b) List of Contractors Violating Contracts.-
  - (1) In general.- The Comptroller General shall distribute to all departments of the Federal Government a list of the names of persons whom the Comptroller General has found to have disregarded their obligations to employees and subcontractors.
  - (2) Restriction on awarding contracts.- No contract shall be awarded to persons appearing on the list or to any firm, corporation, partnership, or association in which the persons have an interest until three years have elapsed from the date of publication of the list.

* * * * *

Sec. 3146. Effect on other federal laws

This subchapter does not supersede or impair any authority otherwise granted by federal law to provide for the establishment of specific wage rates.

Sec. 3147. Suspension of this subchapter during a national emergency

The President may suspend the provisions of this subchapter during a national emergency.

Sec. 3148. Application of this subchapter to certain contracts

This subchapter applies to a contract authorized by law that is made without regard to section 3709 of the Revised Statutes (41 U.S.C. 5), or on a cost-plus-a-fixed-fee basis or otherwise without advertising for proposals, if this subchapter otherwise would apply to the contract.

---

1. Pub. L. 109-284 Sec. 6(11), (12), and (13) made three minor technical corrections in Secs 3141(1), and 3142(d) and (e). (Sept. 27, 2006, 120 Stat.1213.)
2. The Davis-Bacon Act, referred to in par. (1), is act of Mar. 3, 1931, ch. 411, 46 Stat. 1494, as amended, which was classified generally to sections 276a to 276a-5 of former Title 40, Public Buildings, Property, and Works, and was repealed and reenacted as sections 3141-3144, 3146, and 3147 of this title by Pub. L. 107-217, Secs. 1, 6(b), Aug. 21, 2002, 116 Stat. 1062, 1304.

General Decision Number: IL140009 01/24/2014 IL9

Superseded General Decision Number: IL20130009

State: Illinois

Construction Types: Building, Heavy, Highway and Residential

County: Cook County in Illinois.

BUILDING, RESIDENTIAL, HEAVY, AND HIGHWAY PROJECTS (does not include landscape projects).

Modification Number	Publication Date
0	01/03/2014
1	01/24/2014

ASBE0017-001 06/01/2013

	Rates	Fringes
ASBESTOS WORKER/INSULATOR Includes the application of all insulating materials, protective coverings, coatings, and finishes to all types of mechanical systems	$ 46.95	23.85
Fire Stop Technician	$ 37.56	22.65
HAZARDOUS MATERIAL HANDLER includes preparation, wetting, stripping removal scrapping, vacuuming, bagging and disposal of all insulation materials, whether they contain asbestos or not, from mechanical systems	$ 35.21	22.65

---

* BOIL0001-001 01/01/2014

	Rates	Fringes
BOILERMAKER	$ 42.13	25.45

BRIL0021-001 06/01/2011

	Rates	Fringes
BRICKLAYER	$ 39.78	20.80

BRIL0021-004 06/01/2010

	Rates	Fringes

Marble Mason.....$ 39.03 19.90

BRIL0021-006 06/01/2012

	Rates	Fringes
TERRAZZO WORKER/SETTER	$ 39.37	20.51
TILE FINISHER	$ 33.60	15.22
TILE SETTER	$ 40.49	16.93

BRIL0021-009 06/01/2009

	Rates	Fringes
MARBLE FINISHER	$ 29.10	19.90

BRIL0021-012 06/01/2009

	Rates	Fringes
Pointer, cleaner and caulker	$ 39.20	18.51

CARP0555-001 06/01/2013

	Rates	Fringes
CARPENTER		
Carpenter, Lather, Millwright, Piledriver, and Soft Floor Layer	$ 42.52	26.77

CARP0555-002 10/01/2012

	Rates	Fringes
CARPENTER (Excluding structures with elevators and structures over 3 1/2 stories)	$ 32.12	25.47

ELEC0009-003 06/03/2013

	Rates	Fringes
Line Construction		
Groundman	$ 34.98	20.80
Lineman and Equipment Operator	$ 44.85	26.67

ELEC0134-001 06/04/2012

	Rates	Fringes
ELECTRICIAN	$ 42.00	26.75

ELEC0134-002 04/01/1998

	Rates	Fringes

ELECTRICIAN
CLASS "B".....$ 20.71 2.975+a+b

CLASS B SCOPE OF WORK:
Install magnetic or electronic replacement ballasts either singly or in groups including necessary wiring within fixture; Install replacement lamp holders and/or sockets including necessary wiring within fixture including relocating sockets within fixture; Install replacement lighting circuit breakers where necessary; Install replacement lighting switches where necessary; Repair lighting fixtures other than ballast or socket replacements; Rewire chandeliers or incandescent fixtures only within fixtures themselves.

FOOTNOTES:
a-Paid Vacation- Employees who have been employed for one year but less than three years receive 1 week of paid vacation; employees who have been employed three years but less than ten years receive 2 weeks of paid vacation; Employees who have been employed ten years but less than twenty years receive 3 weeks of paid vacation; and employees who have worked twenty or more years receive 4 weeks of paid vacation.

b-Funeral Leave-In the instance of the death of a mother, other-in-law-; father, father-in-law, sister, brother, husband, wife, or a child of an employee shall receive up to three days of paid funeral leave.

ELEC0134-003 06/04/2012

	Rates	Fringes
ELECTRICIAN		
ELECTRICAL TECHNICIAN.....	$ 37.50	20.25

The work shall consist of the installation, operation, inspection, maintenance, repair and service of radio, television, recording, voice sound vision production and reproduction, telephone and telephone interconnect, facsimile, data appatatus, coaxial, fibre optic and wireless equipment, appliances and systems used for the transmission and reception of signals of any nature, business, domestic, commercial, education, entertainment and residential purposes, including but not limited to communication and telephone, electronic and sound equipment, fibre optic and data communication systems, and the performance of any task directly related to such installation or service whether at new or existing sites, such tasks to include the placing of wire and cable and electrical power conduit or other raceway work within the equipment room and pulling wire and/or cable through conduit and the installation of any incidential conduit.

---

* ELEV0002-003 01/01/2014

	Rates	Fringes
ELEVATOR MECHANIC.....	$ 49.90	26.785+a+b

FOOTNOTES:

A. Eight paid holidays: New Year's Day; Memorial Day; Independence Day; Labor Day; Thanksgiving Day; Day after Thanksgiving; Veterans' Day and Christmas Day.

B. Employer contributes 8% of regular basic hourly rate as vacation pay credit for employees with more than 5 years of service; and 6% for 6 months to 5 years of service.

---

* ENGI0150-006 06/01/2013

Building and Residential Construction

	Rates	Fringes
OPERATOR: Power Equipment		
GROUP 1.....	$ 46.10	30.80
GROUP 2.....	$ 44.80	30.80
GROUP 3.....	$ 42.25	30.80
GROUP 4.....	$ 40.50	30.80

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Mechanic; Asphalt Plant*; Asphalt Spreader; Autograde*; Backhoes with Caisson attachment*:Batch Plant*; Benoto(Requires two Engineers); Boiler and Throttle Valve; Caisson Rigs*; Central Redi-Mix Plant*; Combination Backhoe Front Endloader Machine; Compressor and Throttle Valve; Concrete Breaker (Truck Mounted)*; Concrete Conveyor; Concrete Conveyor, Truck Mounted; Concrete Paver over 27E cu. ft.*; Concrete Paver 27E cu ft and Under*; Concrete Placer*; Concrete Placing Boom; Concrete Pump (Truck Mounted); Concrete Tower; Cranes*; Cranes, Hammerhead*; Cranes, (GCI and similar type Requires two operators only); Creter Crane; Crusher, Stone, etc; Derricks; Derricks, Traveling*; Formless Curb and Gutter Machine*; Grader, Elevating; Grouting Machines; Highlift Shovels or Front Endloader 2 1/4 yd. and over; Hoists, Elevators, Outside Type Rack and pinion and similar Machines; Hoists, One, Two, and Three Drum; Hoists, Two Tugger One Floor; Hydraulic Backhoes*; Hydraulic Boom Trucks; Hydraulic Vac (and similar equipment);Locomotives; Motor Patrol*; Pile Drivers amd Skid Rig*; Post Hole Digger; Pre- Stress Machine; Pump Cretes Dual Ram(Requiring frequent Lubrication and Water); Pump Cretes; Squeeze Cretes-Screw Type Pumps Gypsum Bulker and Pump; Raised and Blind Hole Drill*; Roto Mill Grinder (36" and Over)*; Roto Mill Grinder (Less Than 36")*; Scoops-Tractor Drawn; Slip-Form Paver*; Straddle Buggies; Tournapull; Tractor with Boom,

and Side Boom; and Trenching Machines*.

GROUP 2: Bobcat (over 3/4 cu yd); Boilers; Broom, Power Propelled; Bulldozers; Concrete Mixer (Two Bag and over); Conveyor, Portable; Forklift Trucks; Greaser Engineer; Highlift Shovels or Front End loaders under 2 1/4 cu yd; Aotomatic Hoists, Hoists, Inside Elevators; Hoists, Sewer Dragging Machine; Hoists, Tugger Single Drum; Laser Screed; Rock Drill (Self-Propelled); Rock Drill (Truck Mounted)*; Rollers; Steam Generators; Tractors; Tractor Drawn Vibratory Roller (Receives an additional $.50 per hour); Winch Trucks with "A" Frame.

GROUP 3: Air Compressor-Small 250 and Under (1 to 5 not to exceed a total of 300 ft); Air Compressor-Large over 250; Combination-Small Equipment Operator; Generator- Small 50 kw and under; Generator-Large over 50 kw; Heaters, Mechanical; Hoists, Inside Elevators (Remodeling or Renovatin work); Hydrualic Power Units (Pile Driving, Extracting, and Drilling); Low Boys; Pumps Over 3" (1 To 3 not to exceed a total of 300 ft); Pumps, Well Points; Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches; Bobcat (up to and including 3/4 cu yd)

GROUP 4 - Bobcats and/or other Skid Steer Loaders; Brick Forklifts; Oilers

*-Requires Oiler

---

* ENGI0150-025 06/01/2013

Heavy and Highway Construction

	Rates	Fringes
OPERATOR: Power Equipment		
GROUP 1	$ 44.30	30.80
GROUP 2	$ 43.75	30.80
GROUP 3	$ 41.70	30.80
GROUP 4	$ 40.30	30.80
GROUP 5	$ 39.10	30.80

POWER EQUIPMENT OPERATOR CLASSIFICATIONS

GROUP 1: Asphalt Plant*; Asphalt Heater and Planer combination; Asphalt Heater Scarfire*, Asphalt Spreader; Autograder/ GOMACO or similar; ABG Paver*, Backhoes with Caisson attachment*, Ballast Regulator, Belt Loader*; Caisson Rigs*Car Dumper, Central Redi-Mix Plant*, Combination Backhoe; Front End Loader Machine (1 cu yd or over Backhoe bucket or with attachments); Concrete Breaker (truck mounted); Concrete Conveyor; Concrete Paver over 27E cu ft*; Concrete Placer*; Concrete Tube Float; Cranes, all attachments*; Cranes, Hammerhead, Linden, Peco and machines of a like nature*; Creter Crane; Crusher, stone; All Derricks; Derrick Boats; Derricks, traveling*; Dowell

Machine with Air Compressor ($1.00 above Class 1); Dredges*; Field Mechanic Welder; Formless Curb and Gutter Machine*; Gradall and machines of a like nature*; Grader, Elevating; Grader, Motor Grader, Motor Patrol, Auto Patrol, Form Grader, Pull Grader, Subgrader; Guard Rail Post Driver mounted*; Hoists, one, two, and three Drum; Hydraulic Backhoes*; Backhoes with Shear attachments*; Mucking Machine; Pile Drivers and Skid Rig*; Pre-Stress Machine; Pump Cretes Dual Ram (requires frequent lubrication and water)*; Rock Drill- Crawler or Skid Rig*; Rock Drill truck mounted*; Rock/ Track Tamper; Roto Mill Grinder, (36" and over)*; Slip-Form Paver*; Soil Test Drill Rig, truck mounted*; Straddle Buggies; Hydraulic Telescoping Form (tunnel); Tractor Drawn Belt Loader*; Tractor Drawn Belt Loader with attached Pusher (two engineers); Tractor with boom; Tractaire with attachment; Traffic Barrier Transfer Machine*; Trenching Machine; Truck Mounted Concrete Pump with boom*; Underground Boring and/or Mining Machines 5 ft in diameter and over tunnel, etc.*; Wheel Excavator* & Widener (Apsco); Raised or Blind Hoe Drill, Tunnel & Shaft*

GROUP 2: Batch Plant*; Bituminous Mixer; Boiler and Throttle Valve; Bulldozer; Car Loader Trailing Conveyors; Combination Backkhoe Front End Loader Machine, (less than 1 cu yd Backhoe Bucket with attachments); Compressor and Throttle Valve; Compressor, common receiver (3); Concrete Breaker or Hydro Hammer; Concrete Grinding Machine; Concrete Mixer or Paver 7S series to and including 27 cu ft; Concrete Spreader; Concrete Curing Machine; Burlap Machine; Belting Machine and Sealing Machine; Concrete Wheel Saw; Conveyor Muck Cars (Haglund or similar type); Drills (all); Finishing Machine-Concrete; Greaser Engineer; Highlift Shovels or Front End Loader; Hoist- Sewer Dragging Machine; Hydraulic Boom Trucks, all attachments; Hydro-Blaster (requires two operators); Laser Screed*; Locomotives, Dinky; Off-Road Hauling Units (including articulating); Pump Cretes; Squeeze Cretes-Screw Type pumps, Gypsum Bulker and Pump; Roller Asphalt; Rotary Snow Plows; Rototiller, Seaman, self-Propelled; Scoops-Tractor Drawn; Self- propelled Compactor; Spreader-Chip-Stone; Scraper; Scraper-Prime Mover in Tandem regardless of size (add $1.00 to Group 2 hourly rate for each hour and for each machine attached thereto add $1.00 to Group 2 hourly rate for each hour); Tank Car Heater; Tractors, Push, pulling Sheeps Foot, Disc, or Compactor, etc; Tug Boats

GROUP 3: Boilers; Brooms, all power propelled; Cement Supply Tender; Compressor, Common Receiver (2); Concrete Mixer, two bag and over; Conveyor, Portable; Farm type Tractors used for mowing, seeding, etc; Fireman on Boilers; Forklift Trucks; Grouting Machines; Hoists, Automatic; Hoists, all Elevators; Hoists, Tugger single Drum; Jeep Diggers; Low Boys; Pipe Jacking Machines; Post-hole Digger; Power Saw, Concrete, Power Driven; Pug Mills; Rollers, other than asphalt; Seed and Straw Blower; Steam Generators; Stump Machine; Winch Trucks with A-Frame; Work Boats; Tamper-Form motor driven

GROUP 4: Air compressor - Small 250 and under (1 to 5 not to exceed a total of 300 ft); Air Compressor - Large over 250; Combination - Small Equipment Operator; Directional Boring Machine; Generators - Small 50 kw and under; Generators - Large , over 50 kw; Heaters, Mechanical; Hydraulic power unit (Pile Driving, Extracting or Drilling); Light Plants (1 to 5); Pumps, over 3" (1 to 3, not to exceed a total of 300 ft); Pumps, Well Points; Tractaire; Welding Machines (2 through 5); Winches, 4 small electric drill winches;

GROUP 5: Bobcats (All); Brick Forklifts; Oilers; Directional Boring

*Requires Oiler

IRON0001-026 06/01/2013

	Rates	Fringes
IRONWORKER		
Sheeter	$ 42.32	33.74
Structural and Reinforcing	$ 42.07	33.74

IRON0063-001 06/01/2013

	Rates	Fringes
IRONWORKER, ORNAMENTAL	$ 42.90	30.11

IRON0063-002 06/01/2013

	Rates	Fringes
IRONWORKER		
Fence Erector	$ 34.84	23.83

IRON0136-001 07/01/2012

	Rates	Fringes
IRONWORKER		
Machinery Movers; Riggers; Macinery Erectors	$ 35.87	28.67
Master Riggers	$ 38.37	28.67

LABO0002-006 06/01/2011

	Rates	Fringes
LABORER (BUILDING & RESIDENTIAL)		
GROUP 1	$ 35.20	21.45
GROUP 2	$ 35.20	21.45
GROUP 3	$ 35.275	21.45
GROUP 4	$ 35.30	21.45

GROUP 5	$ 35.35	21.45
GROUP 6	$ 35.40	21.45
GROUP 7	$ 34.425	21.45
GROUP 8	$ 34.425	21.45
GROUP 9	$ 35.525	21.45
GROUP 10	$ 35.65	21.45
GROUP 11	$ 35.475	21.45
GROUP 12	$ 36.20	21.45

LABORER CLASSIFICATIONS

GROUP 1: Building Laborers; Plasterer Tenders; Pumps for Dewatering; and other unclassified laborers.

GROUP 2: Fireproofing and Fire Shop laborers.

GROUP 3: Cement Gun.

GROUP 4: Chimney over 40 ft.; Scaffold Laborers.

GROUP 5: Cement Gun Nozzle Laborers (Gunite); Windlass and capstan person.

GROUP 6: Stone Derrickmen & Handlers.

GROUP 7: Jackhammermen; Power driven concrete saws; and other power tools.

GROUP 8: Firebrick & Boiler Laborers.

GROUP 9: Chimney on fire brick; Caisson diggers; & Well Point System men.

GROUP 10: Boiler Setter Plastic Laborers.

GROUP 11: Jackhammermen on fire brick work only.

GROUP 12: Dosimeter use (any device) monitoring nuclear exposure); Asbestos Abatement Laborer; Toxic and Hazardous Waste Removal Laborers.

LABO0002-007 06/01/2011

	Rates	Fringes
LABORER (HEAVY & HIGHWAY)		
GROUP 1	$ 35.20	21.45
GROUP 2	$ 35.475	21.45
GROUP 3	$ 35.35	21.45
GROUP 4	$ 35.475	21.45
GROUP 5	$ 36.20	21.45

LABORER CLASSIFICATIONS

GROUP 1: Common laborer; Tenders; Material expeditor (asphalt plant); Street paving, Grade separation, sidewalk,

curb & gutter, strippers & All laborers not otherwise mentioned

GROUP 2: Ashpalt tampers & smoothers; Cement gun laborers

GROUP 3: Cement Gun Nozzle (laborers), Gunite

GROUP 4: Rakers, Lutemen; Machine-Screwmen; Kettlemen; Mixermen; Drun-men; Jackhammermen (asphalt); Paintmen; Mitre box spreaders; Laborers on birch, overman and similar spreader equipment; Laborers on APSCO; Laborers on air compressor; Paving Form Setter; Jackhammermen (concrete); Power drive concrete saws; other power tools.

GROUP 5: Asbestos Abatement Laborers; Toxic and Hazardous Waste Removal Laborers, Dosimeter (any device) monitoring nuclear exposure

---

LABO0002-008 06/01/2011

	Rates	Fringes
LABORER (Compressed Air)		
0 - 15 POUNDS	$ 36.20	21.45
16 - 20 POUNDS	$ 36.70	21.45
21 - 26 POUNDS	$ 37.20	21.45
27 - 33 POUNDS	$ 38.20	21.45
34 - AND OVER	$ 39.20	21.45
LABORER (Tunnel and Sewer)		
GROUP 1	$ 35.20	21.45
GROUP 2	$ 35.325	21.45
GROUP 3	$ 34.425	21.45
GROUP 4	$ 25.20	21.45
GROUP 5	$ 30.20	21.45

LABORER CLASSIFICATIONS (TUNNEL)

GROUP 1: Cage tenders; Dumpmen; Flagmen; Signalmen; Top laborers

GROUP 2: Air hoist operator; Key board operator; concrete laborer; Grout; Lock tenders (Free Air Side); Steel setters; Tuggers; Switchmen; Car pusher

GROUP 3: Concrete repairmen; Lock tenders (pressure side); Mortar men; Muckers; Grout machine operators; Track layers

GROUP 4: Air trac drill operator; Miner; Bricklayer tenders; Concrete blower operator; Drillers; Dynamiters; Erector operator; Form men; Jackhammermen; Powerpac; Mining machine operators; Mucking machine operator; Laser beam operator; Liner plate and ring setters; Shield drivers; Power knife operator; Welder- burners; Pipe jacking machine operator; skinners; Maintenance technician

GROUP 5: Asbestos abatement laborer; Toxic and hazardous

waste removal laborer; Dosimeter (any device) monitoring nuclear exposure

LABORER CLASSIFICATIONS (SEWER)

GROUP 1: Signalmen; Top laborers and All other laborers

GROUP 2: Concrete laborers and Steel setters

GROUP 3: Cement carriers; Cement mixers; Concrete repairmen; Mortar men; Scaffold men; Second Bottom men

GROUP 4: Air trac drill operator; Bottom men; Bracers-bracing; Bricklayer tenders; Catch basin diggers; Drainlayers; dynamiters; Form men; Jackhammermen; Powerpac; Pipelayers; Rodders; Welder-burners; Well point systems men

GROUP 5: Asbestos abatement laborer, Toxic and hazardous waste removal laborer; Dosimeter (any device) monitoring nuclear exposure

---

LABO0225-001 06/01/2011

	Rates	Fringes
LABORER (DEMOLITION/WRECKING)		
GROUP 1	$ 30.00	21.45
GROUP 2	$ 35.20	21.45
GROUP 3	$ 35.20	21.45

LABORER CLASSIFICATIONS

GROUP 1 - Complete Demolition

GROUP 2 - Interior Wrecking and Strip Out Work

GROUP 3 - Asbestos Work with Complete Demolition/Wrecking or Strip Out Work

---

PAIN0014-001 06/01/2013

	Rates	Fringes
PAINTER (including taper)	$ 40.75	22.64

PAIN0027-001 06/01/2013

	Rates	Fringes
GLAZIER	$ 40.00	29.42

PLAS0005-002 07/01/2012

	Rates	Fringes

PLASTERER.....$ 40.25 22.34

PLAS0502-001 06/01/2012

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER...	$ 42.35	22.93

PLUM0130-001 06/03/2013

	Rates	Fringes
PLUMBER.....	$ 46.05	23.47

PLUM0597-002 06/01/2012

	Rates	Fringes
PIPEFITTER.....	$ 45.05	25.09

ROOF0011-001 12/01/2012

	Rates	Fringes
ROOFER.....	$ 38.35	17.55

SFIL0281-001 06/01/2013

	Rates	Fringes
SPRINKLER FITTER.....	$ 47.15	20.15

SHEE0073-001 06/01/2011

	Rates	Fringes
Sheet Metal Worker.....	$ 40.56	27.23

SHEE0073-002 06/01/2011

	Rates	Fringes
Sheet Metal Worker		
ALUMINUM GUTTER WORK.....	$ 27.63	27.23

TEAM0731-001 06/01/2011

COOK COUNTY - HEAVY AND HIGHWAY

	Rates	Fringes
TRUCK DRIVER		
2 or 3 Axles.....	$ 33.85	16.85
4 Axles.....	$ 34.10	16.85
5 Axles.....	$ 34.30	16.85
6 Axles.....	$ 34.50	16.85

FOOTNOTES:

A. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day.

B. 900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

C. An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

TEAM0731-002 03/01/2012

	Rates	Fringes
Traffic Control Device Monitor TRAFFIC SAFETY WORKER: Primary duties include but are not limited to the delivery, maintenance and pick-up of traffic control devices, the set-up and installation of traffic signs, pavement markings, barricades, crash barrels and glare screens, traffic control surveillance, the repair and maintenance trucks, cars, arrow boards, message signs, barricade and sign fabrication equipment.....	$ 28.25	9.08

TEAM0786-001 06/01/2008

COOK COUNTY - BUILDING AND RESIDENTIAL

	Rates	Fringes
TRUCK DRIVER		
2 & 3 Axles.....	$ 31.33	.10+a
4 Axles.....	$ 31.58	.10+a
5 Axles.....	$ 31.78	.10+a
6 Axles.....	$ 31.98	.10+a

FOOTNOTES:

a. $463.00 per week.

An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

Paid Holidays: New Year's Day, Memorial Day, Independence

Day, Labor Day, Thanksgiving Day, and Christmas Day.

900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is union or non-union.

Union Identifiers

An identifier enclosed in dotted lines beginning with characters other than "SU" denotes that the union classification and rate have found to be prevailing for that classification. Example: PLUM0198-005 07/01/2011. The first four letters , PLUM, indicate the international union and the four-digit number, 0198, that follows indicates the local union number or district council number where applicable , i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2011, following these characters is the effective date of the most current negotiated rate/collective bargaining agreement which would be July 1, 2011 in the above example.

Union prevailing wage rates will be updated to reflect any changes in the collective bargaining agreements governing the rates.

0000/9999: weighted union wage rates will be published annually each January.

Non-Union Identifiers

Classifications listed under an "SU" identifier were derived from survey data by computing average rates and are not union rates; however, the data used in computing these rates may include both union and non-union data. Example: SULA2004-007 5/13/2010. SU indicates the rates are not union majority rates, LA indicates the State of Louisiana; 2004 is the year of the survey; and 007 is an internal number used in producing the wage determination. A 1993 or later date, 5/13/2010, indicates the classifications and rates under that identifier were issued as a General Wage Determination on that date.

Survey wage rates will remain in effect and will not change until a new survey is conducted.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

General Decision Number: IL140020 01/24/2014 IL20

Superseded General Decision Number: IL20130020

State: Illinois

Construction Types: Building Landscape, Heavy Landscape, Highway Landscape and Residential Landscape

Counties: Boone, Cook, De Kalb, Du Page, Grundy, Henry, Kane, Kankakee, Kendall, Lake, McHenry, McLean, Ogle, Peoria, Rock Island, Tazewell, Will, Winnebago and Woodford Counties in Illinois.

LANDSCAPING WORK ON BUILDING, RESIDENTIAL, HEAVY AND HIGHWAY CONSTRUCTION PROJECTS.

Modification Number	Publication Date
0	01/03/2014
1	01/24/2014

* ENGI0150-013 06/01/2013

BUILDING AND HIGHWAY CONSTRUCTION (LANDSCAPE WORK): The landscape work for the Landscape Equipment Operator excludes the preparation of sub-grade prior to application of finish landscape materials and the utilization of any equipment over one cubic yard.

BOONE, COOK, DUPAGE, GRUNDY, KANE, KENDALL, LAKE, MCHENRY, AND WILL COUNTIES

	Rates	Fringes
Operators:.....	$ 28.00	2.50+A+B+C

Includes Angle Dozer, Small; Bobcat and other similar type machines, 1 cu yd or less; Chipping Machine; Combination Backhoe and Front End Loader 1 cu yd or less; Fork Lift Truck; Hi-Reach and High-Ranger;Hydraulic Boom with Clam;Log Skidder; Sttraw Blower and Seeder; Stump Machine;Tractors, Crawlers, Rubber Tire Tractors, Highlift Shovels or Front End Loaders 1 cu yd or less; Tree Spades, all; Utility Tractor and attachments, and Rubber Tire Front End loader or similar machine of 1 to 1.5 cu yd solely used for placement of large decorative boulders, trees with balled soil, and other decorative landscape material too large to be accommodated in a 1 cu yd bucket. All other equipment utilized for performing landscape work, tree trimming or removal of stees, and to install plants; transport trees; excavate plant pits; place soil and other landscape materials; and apply finish landscape material on subgrade prepared by others

FOOTNOTE:

A. Health and Welfare contribution is $1,037 per month effective December 1, 2010.

B. Paid Holidays: New Year's Day; Memorial Day; Fourth of July; Labor Day; Thanksgiving Day; and Christmas Day provided that all such employees shall have in fact worked their regularly scheduled work day immediately preceding and the regularly scheduled work day immediately succeeding the occurrence of such holiday.

C. Paid Vacation: All employees who have been in the employ of the Employer for a full season of work shall be entitled to one (1) week of vacation with pay. Pay shall be 40 times the employee's regular straight time hourly rate. Effective as of January 1, 2010, employees who have worked for the employer for not less than eleven hundred (1100) straight time and overtime hours since their most recent anniversary date of hire as of vacation time will be deemed to have worked one full season. All employees who have been in the employ of their Employer for three (3) or more consecutive full seasons of work shall at the conclusion of their current season be entitled to two (2) weeks of vacation with pay. Pay shall be 80 times the employee's regular straight time hourly rate. All employees who have been in the employ of their employer for nine (9) or more consecutive full seasons of work shall at the conclusion of their current season be entitled to three (3) weeks of vacation with pay. Pay shall be 120 times the employee's regular straight time hourly rate.

---

* ENGI0150-023 06/01/2013

HIGHWAY CONSTRUCTION (LANDSCAPE WORK): The landscape work for the Landscape Equipment Operator excludes the preparation of sub-grade prior to application of finish landscape materials and the utilization of any equipment over one cubic yard.

HENRY, MCLEAN, OGLE, PEORIA, ROCK ISLAND, TAZEWELL, WINNEBAGO, and WOODFORD COUNTIES

	Rates	Fringes
Operators:.....	$ 28.00	2.00+A+B+C

Includes the following: Angle Dozer, Small; Bobcat and other similar type machines, 1 cu yd or less; Chipping Machine; Combination Backhoe and Front End Loader 1 cu yd or less; Fork Lift Truck; Hi-Reach and High-Ranger;Hydraulic Boom with Clam;Log Skidder; Sttraw Blower and Seeder; Stump Machine;Tractors, Crawlers, Rubber Tire Tractors, Highlift Shovels or Front End Loaders 1 cu yd or less; Tree Spades, all; Utility Tractor and attachments, and Rubber Tire Front End loader or similar machine of 1 to 1.5 cu yd solely used

for placement of large decorative boulders, trees with balled soil, and other decorative landscape material too large to be accommodated in a 1 cu yd bucket. All other equipment utilized for performing landscape work, tree trimming or removal of stees, and to install plants; transport trees; excavate plant pits; place soil and other landscape materials; and apply finish landscape material on subgrade prepared by others

FOOTNOTE:

A. Health and Welfare contribution is $1,037.00 per month effective December 1, 2010.

B. Paid Holidays: New Year's Day; Memorial Day; Fourth of July; Labor Day; Thanksgiving Day; and Christmas Day provided that all such employees shall have in fact worked their regularly scheduled work day immediately preceding and the regularly scheduled work day immediately succeeding the occurrence of such holiday.

C. Paid Vacation: All employees who have been in the employ of the Employer for a full season of work shall be entitled to one (1) week of vacation with pay. Pay shall be 40 times the employee's regular straight time hourly rate. Effective as of January 1, 2010, employees who have worked for the employer for not less than eleven hundred (1100) straight time and overtime hours since their most recent anniversary date of hire as of vacation time will be deemed to have worked one full season. All employees who have been in the employ of their Employer for three (3) or more consecutive full seasons of work shall at the conclusion of their current season be entitled to two (2) weeks of vacation with pay. Pay shall be 80 times the employee's regular straight time hourly rate. All employees who have been in the employ of their employer for nine (9) or more consecutive full seasons of work shall at the conclusion of their current season be entitled to three (3) weeks of vacation with pay. Pay shall be 120 times the employee's regular straight time hourly rate.

LABO0032-004 05/01/2009

HIGHWAY CONSTRUCTION

WINNEBAGO COUNTY

	Rates	Fringes
Landscape Laborer.....	$ 27.66	18.50

LABO0362-003 05/01/2013

HIGHWAY CONSTRUCTION

MCLEAN COUNTY

	Rates	Fringes
Landscape Laborer	$ 31.08	17.79

LABO0751-004 05/01/2011

HIGHWAY CONSTRUCTION

KANKAKEE COUNTY

	Rates	Fringes
Landscape Laborer	$ 32.47	19.60

LABO0852-004 05/01/2006

HIGHWAY CONSTRUCTION

ROCK ISLAND AND HENRY COUNTIES

	Rates	Fringes
Landscape Laborer	$ 21.94	12.79

LABO0996-004 05/01/2013

HIGHWAY CONSTRUCTION

PEORIA, TAZEWELL, AND WOODFORD COUNTIES

	Rates	Fringes
Landscape Laborer	$ 31.31	17.56

TEAM0065-005 05/01/2013

MCLEAN COUNTY (South of a straight line from where Route 24 intersects the Woodford County line in a Southeast direction to the South Southwest corner of Livingston County), OGLE (South of Route 72/West of Route 251), PEORIA, TAZEWELL, and WOODFORD (All except Northeast corner East of Route 51/251 & South of Route 24) COUNTIES

	Rates	Fringes
TRUCK DRIVER		
Group 1	$ 32.04	10.70+a
Group 2	$ 32.50	10.70+a
Group 3	$ 32.72	10.70+a
Group 4	$ 33.02	10.70+a
Group 5	$ 33.88	10.70+a

FOOTNOTE: a. $201.2 per week

CLASSIFICATIONS:

GROUP 1: Drivers on 2 axles hauling less than 9 tons; air compressor & welding machines and brooms, including those pulled by separate units; Truck Driver Helper, warehouse employees; Mechanic Helpers; greasers and tiremen; pick-up trucks when hauling material, tools, or workers to and from and on the job site; and forklifts up to 6,000 lb capacity.

GROUP 2: 2 or 3 axles hualing more than 9 tons but hauling less than 16 tons; A-frame winch trucks; hydrolift trucks; Vactor Trucks or similar equipment when used for transportation purposes; Forklift over 6,000 lb.capacity; winch trucks; and four axle combiation units.

GROUP 3: 2, 3 or 4 Axles hauling 16 tons or more; 5-Axles or more combination units; drivers on water pulls; articulated dump trucks; mechanics and working forepersons.

GROUP 4: Low Boy and Oil Distributors.

GROUP 5: Drivers who require special protective clothing while employed on hazardous waste work.

---

* TEAM0179-004 06/01/2011

GRUNDY, KENDALL, MCLEAN (North of a straight line starting at the intersection of McLean-Woodford Counties line & Route 24 in a Southeastern direction to the South Southwest corner of Livingston County), WILL, and WOODFORD (Northeast corner east of Route 51/251 & North of Route 24) COUNTIES

	Rates	Fringes
TRUCK DRIVER		
2-3 AXLES	$ 35.65	7.25+a
4 AXLES	$ 35.80	7.25+a
5 AXLES	$ 36.00	7.25+a
6 AXLES	$ 36.20	7.25+a
All Lowboy Trucks	$ 37.20	7.25+a

FOOTNOTE: a. $229.80 per week.

FOOTNOTE: An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

CLASSIFICATIONS:

Group 1 - Frame Truck when used for transportation purposes; Air Compressor and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Articulated Dumps; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry Alls; Forl Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors, two-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Pothole Repair Trucks; Power Mower Tractors; Quick Change Barrier; Self-Propelled Chip Spreader; Shipping and

Receiving Clerks and Checkers; Skipman; Slurry Trucks, two-man operation; Slurry Trucks, Conveyor Operated - 2 or 3 man operation; Teamsters; Unskilled Dumpmen; Warehousemen and Dockmen; Truck Drivers hauling warning lights, barricades, and portable toilets on the job site

Group 2 - Dispatcher; Dump Crets and Adgetators under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-Mix Plant Hopper Operator; Winch Trucks, 2 Axles

Group 3 - Dump Crets and Adgetators, 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, one-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long;
Slurry Trucks, one-man operation; Winch Trucks, 3 axles or more; Mechanic - *Truck Welder and *Truck Painter*These classifications shall only apply in areas where and when it has been a past area practice; Asphalt Plant Operators in areas where it has been past practice

Group 4 - Dual-purpose vehicels, such as mounted crane tucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front

---

* TEAM0179-008 06/01/2011

KANKAKEE COUNTY

	Rates	Fringes
TRUCK DRIVER		
2 or 3 axles	$ 35.65	7.25+a
4 axles	$ 35.80	7.25+a
5 axles	$ 36.00	7.25+a
6 axles	$ 36.20	7.25+a

FOOTNOTE: a. $229.80 per week.

FOOTNOTE: An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

CLASSIFICATIONS:

Group 1 - Frame Truck when used for transportation purposes; Air Compressor and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Articulated Dumps; Batch Gate Lockers; Batch Hopperman; Car

and Truck Washers; Carry Alls; Forl Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors, two-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Pothole Repair Trucks; Power Mower Tractors; Quick Change Barrier; Self-Propelled Chip Spreader; Shipping and Receiving Clerks and Checkers; Skipman; Slurry Trucks, two-man operation; Slurry Trucks, Conveyor Operated - 2 or 3 man operation; Teamsters; Unskilled Dumpmen; Warehousemen and Dockmen; Truck Drivers hauling warning lights, barricades, and portable toilets on the job site

Group 2 - Dispatcher; Dump Crets and Adgetators under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-Mix Plant Hopper Operator; Winch Trucks, 2 Axles

Group 3 - Dump Crets and Adgetators, 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, one-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long;
Slurry Trucks, one-man operation; Winch Trucks, 3 axles or more; Mechanic - *Truck Welder and *Truck Painter*These classifications shall only apply in areas where and when it has been a past area practice; Asphalt Plant Operators in areas where it has been past practice

Group 4 - Dual-purpose vehicels, such as mounted crane tucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front

---

* TEAM0301-001 06/01/2011

LAKE AND MCHENRY COUNTIES

	Rates	Fringes
TRUCK DRIVER		
2-3 AXLES	$ 35.85	.15+a
4 AXLES	$ 36.00	.15+a
5 AXLES	$ 36.20	.15+a
6 AXLES	$ 36.40	.15+a

FOOTNOTE: a. $288.00 per week health and welfare
$240.00 per week pension

An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day.

900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

CLASSIFICATIONS:

Group 1 - Frame Truck when used for transportation purposes; Air Compressor and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Articulated Dumps; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry Alls; Forl Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors, two-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Pothole Repair Trucks; Power Mower Tractors; Quick Change Barrier; Self-Propelled Chip Spreader; Shipping and Receiving Clerks and Checkers; Skipman; Slurry Trucks, two-man operation; Slurry Trucks, Conveyor Operated - 2 or 3 man operation; Teamsters; Unskilled Dumpmen; Warehousemen and Dockmen; Truck Drivers hauling warning lights, barricades, and portable toilets on the job site

Group 2 - Dispatcher; Dump Crets and Adgetators under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-Mix Plant Hopper Operator; Winch Trucks, 2 Axles

Group 3 - Dump Crets and Adgetators, 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, one-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long;
Slurry Trucks, one-man operation; Winch Trucks, 3 axles or more; Mechanic - *Truck Welder and *Truck Painter*These classifications shall only apply in areas where and when it has been a past area practice; Asphalt Plant Operators in areas where it has been past practice

Group 4 - Dual-purpose vehicels, such as mounted crane tucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front

---

* TEAM0325-004 06/01/2011

BOONE and WINNEBAGO COUNTIES

	Rates	Fringes
TRUCK DRIVER		
2 - 3 Axles	$ 32.96	15.62
4 Axles	$ 33.11	15.62
5 Axles	$ 33.31	15.62
6 Axles	$ 33.42	15.62

FOOTNOTE: An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

CLASSIFICATIONS:

Group 1 - Frame Truck when used for transportation purposes; Air Compressor and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Forl Lifts and Hoisters; Helpers;
Mechanics Helpers and Greasers; Oil Distributors, two-man operation; Pavement Breakers
Pole Trailer, up to 40 feet; Power Mower Tractors; Skipman; Slurry Trucks, two-man operation; Teamsters; Truck Drivers hauling warning lights, barricades, and portable toilets on the job site

Group 2 - Dump Crets and Adgetators under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-Mix Plant Hopper Operator; Winch Trucks, 2 Axles

Group 3 - Dump Crets and Adgetators, 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, one-man operation
Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long, additional $0.50 per hour; Slurry Trucks, one-man operation; Winch Trucks, 3 axles or more
*Mechanic*Truck Welder and Truck Painter; *Winter Rate: Between Dec. 15 and Feb. 28 the mechanic and welder rate shall be $2.00 less than the scheduled scale. Truck Painter and Truck Welder classifications shall only apply in areas where and when it has been a past area practice;
Dual-purpose vehicels, such as mounted crane tucks with hoist and accessories

Group 4 - Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front

---

* TEAM0330-004 06/01/2010

DEKALB and OGLE (North of Route 72/East of Route 251, Adeline, Byron, Creston, Dement, Forreston North of Route 72, Leaf River North of Route 72, Lynnville, Monroe, Rochelle, & Scott) COUNTIES

	Rates	Fringes
TRUCK DRIVER		
2-3 AXLES	$ 33.95	.15+a
4 AXLES	$ 34.10	.15+a
5 AXLES	$ 34.30	.15+a
6 AXLES	$ 34.50	.15+a

FOOTNOTE: a. $514.00 per week

An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day.

900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

CLASSIFICATIONS:

Group 1 - Frame Truck when used for transportation purposes; Air Compressor and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Articulated Dumps; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry Alls; Forl Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors, two-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Pothole Repair Trucks; Power Mower Tractors; Quick Change Barrier; Self-Propelled Chip Spreader; Shipping and Receiving Clerks and Checkers; Skipman; Slurry Trucks, two-man operation; Slurry Trucks, Conveyor Operated - 2 or 3 man operation; Teamsters; Unskilled Dumpmen; Warehousemen and Dockmen; Truck Drivers hauling warning lights, barricades, and portable toilets on the job site

Group 2 - Dispatcher; Dump Crets and Adgetators under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-Mix Plant Hopper Operator; Winch Trucks, 2 Axles

Group 3 - Dump Crets and Adgetators, 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil

Distributors, one-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long;
Slurry Trucks, one-man operation; Winch Trucks, 3 axles or more; Mechanic - *Truck Welder and *Truck Painter*These classifications shall only apply in areas where and when it has been a past area practice; Asphalt Plant Operators in areas where it has been past practice

Group 4 - Dual-purpose vehicels, such as mounted crane tucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front

---

TEAM0371-004 05/01/2013

HENRY and ROCK ISLAND COUNTIES

	Rates	Fringes
TRUCK DRIVER		
Group 1	$ 32.15	10.70+a
Group 2	$ 32.60	10.70+a
Group 3	$ 32.85	10.70+a
Group 4	$ 33.12	10.70+a
Group 5	$ 33.99	10.70+a

FOOTNOTE: a. $41.70 per day

CLASSIFICATIONS:

GROUP 1: Drivers on 2 axles hauling less than 9 tons; air compressor & welding machines and brooms, including those pulled by separate units; Truck Driver Helper, warehouse employees; Mechanic Helpers; greasers and tiremen; pick-up trucks when hauling material, tools, or workers to and from and on the job site; and forklifts up to 6,000 lb capacity.

GROUP 2: 2 or 3 axles hualing more than 9 tons but hauling less than 16 tons; A-frame winch trucks; hydrolift trucks; Vactor Trucks or similar equipment when used for transportation purposes; Forklift over 6,000 lb.capacity; winch trucks; and four axle combiation units.

GROUP 3: 2, 3 or 4 Axles hauling 16 tons or more; 5-Axles or more combination units; drivers on water pull1s; articulated dump trucks; mechanics and working forepersons.

GROUP 4: Low Boy and Oil Distributors.

GROUP 5: Drivers who require special protective clothing while employed on hazardous waste work.

---

* TEAM0673-003 06/01/2008

DU PAGE and KANE COUNTIES

	Rates	Fringes
TRUCK DRIVER		
2-3 AXLES	$ 32.55	.15+a
4 AXLES	$ 32.70	.15+a
5 AXLES	$ 32.90	.15+a
6 AXLES	$ 33.10	.15+a

FOOTNOTE: a. $434.00 per week.

An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day.

900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

CLASSIFICATIONS:

Group 1 - Frame Truck when used for transportation purposes; Air Compressor and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Articulated Dumps; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry Alls; Forl Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors, two-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Pothole Repair Trucks; Power Mower Tractors; Quick Change Barrier; Self-Propelled Chip Spreader; Shipping and Receiving Clerks and Checkers; Skipman; Slurry Trucks, two-man operation; Slurry Trucks, Conveyor Operated - 2 or 3 man operation; Teamsters; Unskilled Dumpmen; Warehousemen and Dockmen; Truck Drivers hauling warning lights, barricades, and portable toilets on the job site

Group 2 - Dispatcher; Dump Crets and Adgetators under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-Mix Plant Hopper Operator; Winch Trucks, 2 Axles

Group 3 - Dump Crets and Adgetators, 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, one-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long;
Slurry Trucks, one-man operation; Winch Trucks, 3 axles or

more; Mechanic - *Truck Welder and *Truck Painter*These classifications shall only apply in areas where and when it has been a past area practice; Asphalt Plant Operators in areas where it has been past practice

Group 4 - Dual-purpose vehicels, such as mounted crane tucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front

---

TEAM0731-001 06/01/2011

COOK COUNTY - HEAVY AND HIGHWAY

	Rates	Fringes
TRUCK DRIVER		
2 or 3 Axles	$ 33.85	16.85
4 Axles	$ 34.10	16.85
5 Axles	$ 34.30	16.85
6 Axles	$ 34.50	16.85

FOOTNOTES:

A. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day.

B. 900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

C. An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

TEAM0786-001 06/01/2008

COOK COUNTY - BUILDING AND RESIDENTIAL

	Rates	Fringes
TRUCK DRIVER		
2 & 3 Axles	$ 31.33	.10+a
4 Axles	$ 31.58	.10+a
5 Axles	$ 31.78	.10+a
6 Axles	$ 31.98	.10+a

FOOTNOTES:

a. $463.00 per week.

An additional $.20 per axle shall be paid for all vehicles with more than six (6) axles.

Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day.

900 straight time hours or more in 1 calendar year for the same employer shall receive 1 week paid vacation; 3 years - 2 weeks paid vacation; 10 years - 3 weeks paid vacation; 20 years - 4 weeks paid vacation.

SUIL1993-001 01/19/1993

BUILDING CONSTRUCTION (LANDSCAPE WORK):

	Rates	Fringes
LABORER		
BOONE, GRUNDY, KANE, KENDALL, LAKE, MCHENRY, & WILL COUNTIES		
LANDSCAPE LABORERS	$ 7.25	
COOK COUNTY		
LANDSCAPE LABORERS	$ 7.25	
LANDSCAPE PLANTSMAN	$ 9.80	1.82
DE KALB COUNTY		
LANDSCAPE LABORERS	$ 7.25	
LANDSCAPE OPERATORS	$ 7.25	
LANDSCAPE PLANTSMAN	$ 9.66	.26
DU PAGE COUNTY		
LANDSCAPE LABORERS	$ 7.25	
LANDSCAPE PLANTSMAN	$ 9.04	1.16
GRUNDY, LAKE & WILL COUNTIES		
LANDSCAPE DRIVER 2 & 3 Axles	$ 11.86	2.81
LANDSCAPE PLANTSMAN	$ 12.00	3.32

SUIL1993-002 01/19/1993

HEAVY CONSTRUCTION (LANDSCAPE WORK)

	Rates	Fringes
LABORER		
BOONE, GRUNDY, KANE, KENDALL, LAKE, MCHENRY & WILL COUNTIES:		
LANDSCAPE DRIVER, 2 & 3 AXLES	$ 11.94	2.42
LANDSCAPE LABORERS	$ 7.25	
LANDSCAPE OPERATORS	$ 13.11	3.01
LANDSCAPE PLANTSMAN	$ 9.73	2.05
COOK COUNTY:		
LANDSCAPE DRIVER, 2 & 3 AXLES	$ 9.93	1.89
LANDSCAPE LABORERS	$ 7.25	
LANDSCAPE OPERATORS	$ 10.98	2.12
LANDSCAPE PLANTSMAN	$ 10.08	2.06

```
     DE KALB COUNTY:
      LANDSCAPE LABORERS.........$  7.25
      LANDSCAPE OPERATORS........$  7.25
      LANDSCAPE PLANTSMAN........$  9.66              .26
     DU PAGE COUNTY:
      LANDSCAPE DRIVER, 2 & 3
      AXLES......................$  8.32             1.02
      LANDSCAPE LABORERS.........$  7.25
      LANDSCAPE OPERATORS........$ 10.75
      LANDSCAPE PLANTSMAN........$ 10.65
-----------------------------------------------------------------
  SUIL1993-003 01/19/1993

HIGHWAY CONSTRUCTION (LANDSCAPE WORK):

                                   Rates          Fringes

LABORER
     DE KALB COUNTY
      LANDSCAPE LABORERS.........$  7.25
      LANDSCAPE OPERATORS........$  7.25
      LANDSCAPE PLANTSMAN........$  9.66              .26
     KANKAKEE COUNTY:
      LANDSCAPE DRIVER...........$  8.75              .17
      LANDSCAPE OPERATOR.........$ 16.57             3.56
     PEORIA, TAZEWELL, &
     WOODFORD COUNTIES:
      TRUCK DRIVERS 2 & 3 AXLES..$ 17.58             5.88
-----------------------------------------------------------------

WELDERS - Receive rate prescribed for craft performing
operation to which welding is incidental.

=================================================================


Unlisted classifications needed for work not included within
the scope of the classifications listed may be added after
award only as provided in the labor standards contract clauses
(29CFR 5.5 (a) (1) (ii)).


-----------------------------------------------------------------


The body of each wage determination lists the classification
and wage rates that have been found to be prevailing for the
cited type(s) of construction in the area covered by the wage
determination.  The classifications are listed in alphabetical
order of "identifiers" that indicate whether the particular
rate is union or non-union.


Union Identifiers

An identifier enclosed in dotted lines beginning with
characters other than "SU" denotes that the union
```

classification and rate have found to be prevailing for that classification. Example: PLUM0198-005 07/01/2011. The first four letters , PLUM, indicate the international union and the four-digit number, 0198, that follows indicates the local union number or district council number where applicable , i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2011, following these characters is the effective date of the most current negotiated rate/collective bargaining agreement which would be July 1, 2011 in the above example.

Union prevailing wage rates will be updated to reflect any changes in the collective bargaining agreements governing the rates.

0000/9999: weighted union wage rates will be published annually each January.

Non-Union Identifiers

Classifications listed under an "SU" identifier were derived from survey data by computing average rates and are not union rates; however, the data used in computing these rates may include both union and non-union data. Example: SULA2004-007 5/13/2010. SU indicates the rates are not union majority rates, LA indicates the State of Louisiana; 2004 is the year of the survey; and 007 is an internal number used in producing the wage determination. A 1993 or later date, 5/13/2010, indicates the classifications and rates under that identifier were issued as a General Wage Determination on that date.

Survey wage rates will remain in effect and will not change until a new survey is conducted.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.)

and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

SPECIAL PROVISION
FOR
REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

i) General

ii) Nondiscrimination

iii) Nonsegregated Facilities

iv) Payment of Predetermined Minimum Wage

v) Statements and Payrolls

vi) Record of Materials, Supplies, and Labor

vii) Subletting or Assigning the Contract

viii) Safety: Accident Prevention

ix) False Statements Concerning Highway Projects

x) Implementation of Clean Air Act and Federal Water Pollution Control Act

xi) Certification Regarding Debarment, Suspension Ineligibility, and Voluntary Exclusion

xii) Certification Regarding Use of Contract Funds for Lobbying

I. GENERAL

1) These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

2) Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.

3) A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.

4) A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

Section I, paragraph 2;

Section IV, paragraphs 1, 2, 3, 4, and 7;

Section V, paragraphs 1 and 2a through 2g.

5) Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.

6) Selection of Labor. During the performance of this contract, the contractor shall not:

   a) discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or

   b) employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

1) Equal Employment Opportunity. Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630 and 41 CFR 60) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

   a) The contractor will work with the State Highway Agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.

   b) The contractor will accept as his operating policy the following statement:

      "It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job training."

2) EEO Officer. The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.

3) Dissemination of Policy. All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

   a) Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

   b) All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

   c) All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.

   d) Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

   e) The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4) Recruitment. When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.

   a) The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.

   b) In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementations of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)

c) The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.

5) Personnel Actions. Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a) The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b) The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c) The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d) The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

6) Training and Promotion:

a) The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.

b) Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.

c) The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d) The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.

7) Unions. If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and

female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:

a) The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.

b) The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c) The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the SHA and shall set forth what efforts have been made to obtain such information.

d) In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the SHA.

8) Selection of Subcontractors, Procurement of Materials and Leasing of Equipment. The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.

a) The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.

b) Disadvantaged business enterprises (DBE), as defined in 49 CFR 23 shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.

c) The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.

9) Records and Reports. The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.

a) The records kept by the contractor shall document the following:

(1) The number of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and

(4) The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.

b) The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

a) By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.

b) As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, timeclocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

c) The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of $10,000 or more and that it will retain such certifications in its files.

IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

1) General:

   a) All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3) issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c)] the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b)(2) of the Davis-Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.

   b) Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.

   c) All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2) Classification:

   a) The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.

b) The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:

(1) the work to be performed by the additional classification requested is not performed by a classification in the wage determination;

(2) the additional classification is utilized in the area by the construction industry;

(3) the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and

(4) with respect to helpers, when such a classification prevails in the area in which the work is performed.

c) If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

d) In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary

e) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3) Payment of Fringe Benefits:

a) Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.

b) If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided, that the Secretary of Labor has found, upon the written request of the contractor, that the

applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4) Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:

a) Apprentices:

(1) Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.

(2) The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

(3) Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

(4) In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b) Trainees:

(1) Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.

(2) The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(3) Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which case such trainees shall receive the same fringe benefits as apprentices.

(4) In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c) Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV.2. Any worker listed on a payroll at a helper wage rate, who is not a helper under an approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5) Apprentices and Trainees (Programs of the U.S. DOT):

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6) Withholding:

The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7) Overtime Requirements:

No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8) Violation:

Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of $10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9) Withholding for Unpaid Wages and Liquidated Damages:

The SHA shall upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1) Compliance with Copeland Regulations (29 CFR 3):

   The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2) Payrolls and Payroll Records:

   a) Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.

   b) The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b) (2) (B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.

   c) Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices, trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period). The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V. This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029-005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

   d) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;

(2) that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;

(3) that each laborer or mechanic has been paid not less that the applicable wage rate and fringe benefits or cash equivalent for the classification of worked performed, as specified in the applicable wage determination incorporated into the contract.

e) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.

f) The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 231.

g) The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

1) On all Federal-aid contracts on the National Highway System, except those which provide solely for the installation of protective devices at railroad grade crossings, those which are constructed on a force account or direct labor basis, highway beautification contracts, and contracts for which the total final construction cost for roadway and bridge is less than $1,000,000 (23 CFR 635) the contractor shall:

a) Become familiar with the list of specific materials and supplies contained in Form FHWA-47, "Statement of Materials and Labor Used by Contractor of Highway Construction Involving Federal Funds," prior to the commencement of work under this contract.

b) Maintain a record of the total cost of all materials and supplies purchased for and incorporated in the work, and also of the quantities of those specific materials and supplies listed on Form FHWA-47, and in the units shown on Form FHWA-47.

c) Furnish, upon the completion of the contract, to the SHA resident engineer on Form FHWA-47 together with the data required in paragraph 1b relative to materials and supplies, a final labor summary of all contract work indicating the total hours worked and the total amount earned.

2) At the prime contractor's option, either a single report covering all contract work or separate reports for the contractor and for each subcontract shall be submitted.

VII. SUBLETTING OR ASSIGNING THE CONTRACT

1) The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).

   a) "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.

   b) "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a whole and in general are to be limited to minor components of the overall contract.

2) The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3) The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.

4) No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

VIII. SAFETY: ACCIDENT PREVENTION

1) In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2) It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

3) Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

NOTICE TO ALL PERSONNEL ENGAGED ON FEDERAL-AID HIGHWAY PROJECTS

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more that $10,000 or imprisoned not more than 5 years or both."

X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $100,000 or more.)

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1) That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 et seq., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.

2) That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.

3) That the firm shall promptly notify the SHA of the receipt of any communication from the Director, Office of Federal Activities, and EPA, indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

4) That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1) Instructions for Certification - Primary Covered Transactions:

   (Applicable to all Federal-aid contracts - 49 CFR 29)

   a) By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.

   b) The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

   c) The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition

to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.

d) The prospective primary participant shall provide immediate written notice to the department or agency to which this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e) The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.

f) The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g) The prospective primary participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

h) A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded from Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i) Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j) Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Primary Covered Transactions

1) The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:

   a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

   b) Have not within a 3-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

   c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and

   d) Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

2) Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

Instructions for Certification - Lower Tier Covered Transactions:

(Applicable to all subcontracts, purchase orders and other lower tier transactions of $25,000 or more - 49 CFR 29)

   a) By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

   b) The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

   c) The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

   d) The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in

this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.

e) The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f) The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

g) A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.

h) Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i) Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Covered Transactions:

1) The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

2) Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

II. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 - 49 CFR 20)

1) The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

   a) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

   b) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2) This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3) The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

FEDERAL AID PROPOSAL NOTICE

NOTICE TO PROSPECTIVE FEDERAL-AID CONSTRUCTION CONTRACTORS

I. CERTIFICATION OF NONSEGREGATED FACILITIES

   a) A Certification of Nonsegregated Facilities, as required by the may 9, 1967, Order of the Secretary of Labor (32 F. R. 7439. May 19, 1967) on Elimination of Segregated Facilities (is included in the proposal and must be submitted prior to the award of a Federal-aid highway construction contract exceeding $10,000 which is not exempt from the provisions of the Equal Opportunity clause.)

   b) Bidders are cautioned as follows: By signing this bid, the bidder will be deemed to have signed and agreed to the provisions of the "Certification of Nonsegregated Facilities" in this proposal. This certification provides that the bidder does not maintain or provide for his employee facilities which are segregated on a basis of race, creed, color, or national origin, whether such facilities are

segregated by directive or on a de facto basis. The certification also provides that the bidder will not maintain such segregated facilities.

c) Bidders receiving Federal-aid highway construction contract awards exceeding $10,000 which are not exempt from the provisions of the Equal Opportunity clause, will be required to provide for the forwarding of the following notice to prospective subcontractors for construction contracts and material suppliers where the subcontracts or material supply agreements exceed $10,000 and are not exempt from the provisions of the Equal Opportunity clause.

"NOTICE TO PROSPECTIVE SUBCONTRACTORS AND MATERIAL SUPPLIERS OF REQUIREMENT FOR CERTIFICATION OF NONSEGREGATED FACILITIES

a) A Certification of Nonsegregated Facilities as required by the May 9, 1967, Order of the Secretary of Labor (32 F. R. 7439, May 19, 1967) on Elimination of Segregated Facilities, which is included in the proposal, or attached hereto, must be submitted by each subcontractor and material supplier prior to the award of the subcontract or consummation of material supply agreement if such subcontract or agreement exceeds $10,000 and is not exempt from the provisions of the Equal Opportunity clause.

b) Sub contractors and material suppliers are cautioned as follows: by signing the subcontract or entering into a material supply agreement, the subcontractor or material supplier will be doomed to have signed and agreed to the provisions of the "Certification of Nonsegregated Facilities" In the subcontract or material supply agreement. This certification provides that the subcontractor or material supplier does not maintain or provide for his employees facilities which are segregated on the basis of race, creed, color, or national origin, whether such facilities are segregated by directive or on a de facto basis. The certification also provides that the subcontractor or material supplier will not maintain such segregated facilities.

c) Subcontractors and material suppliers receiving subcontract awards or material supply agreements exceeding $10,000 which are not exempt from the provisions of the Equal Opportunity clause will be required to provide for the forwarding of this notice to prospective subcontractors for construction contracts and material suppliers where the subcontracts or material supply agreements exceed $10,000 and are not exempt from the provisions of the Equal Opportunity clause."

II. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

a) By signing this bid, the bidder will be deemed to have stipulated as follows:

1) That any facility to be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub. L. 91-404), (33 U.S.C. 1251 et seq., as amended by Pub. L. 92-500, Executive Order 11738, and regulations in implementation thereof (40 C.F.R., Part 15), is not listed on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 C.F.A. 15.20.

2) That the State highway department shall be promptly notified prior to contract award of the receipt by the bidder of any communication from the Director, Office of Federal Activities, EPA, indicating that a

facility to be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

State of Illinois
Department of Transportation

SPECIAL PROVISION
FOR
ADDITIONAL STATE REQUIREMENTS
FOR FEDERAL-AID CONSTRUCTION CONTRACTS

Effective: February 1, 1969
Revised: January 1, 2014

The following provisions are State of Illinois requirements and are in addition to the Federal requirements contained in FHWA-1273, "Required Contract Provisions Federal-Aid Construction Contracts".

EQUAL EMPLOYMENT OPPORTUNITY

In the event of the Contractor's noncompliance with the provisions of this Equal Employment Opportunity Clause, the Illinois Human Rights Act, or the Illinois Department of Human Rights Rules and Regulations, the Contractor may be declared ineligible for future Contracts or subcontracts with the State of Illinois or any of its political sub-divisions or municipal corporations, and the contract may be cancelled or voided in whole or in part, and such other sanctions or penalties may be imposed or remedies invoked as provided by statute or regulation.

During the performance of this contract, the Contractor agrees as follows:

(1) That it will not discriminate against any employee or applicant for employment because of race, color, religion, sex, marital status, national origin or ancestry, age, physical or mental handicap unrelated to ability, or an unfavorable discharge from military service; and further that it will examine all job classifications to determine if minority persons or women are underutilized and will take appropriate affirmative action to rectify any such underutilization.

(2) That, if it hires additional employees in order to perform this contract or any portion hereof, it will determine the availability (according to the Department's Rules and Regulations) of minorities and women in the area(s) from which it may reasonably recruit and it will hire for each job classification for which employees are hired in such a way that minorities and women are not underutilized.

(3) That, in all solicitations or advertisements for employees placed by it or on its behalf, it will state that all applicants will be afforded equal opportunity without discrimination because of race, color, religion, sex, marital status, national origin or ancestry, age, physical or mental handicap unrelated to ability, or an unfavorable discharge from military service.

(4) That it will send to each labor organization or representative of workers with which it has or is bound by a collective bargaining or other agreement or understanding, a notice advising such labor organization or representative of the Contractor's obligations under the Illinois Human Rights Act and the Department's Rules and Regulations. If any such labor organization or representative fails or refuses to cooperate with the Contractor in its efforts to comply with such Act and Rules and Regulations, the Contractor will promptly so notify the Illinois Department of Human Rights and the contracting agency and will recruit employees from other sources when necessary to fulfill its obligations thereunder.

(5) That it will submit reports as required by the Illinois Department of Human Rights Rules and Regulations, furnish all relevant information as may from time to time be requested by the Department or the contracting agency, and in all respects comply with the Illinois Human Rights Act and the Department's Rules and Regulations.

(6) That it will permit access to all relevant books, records, accounts, and work sites by personnel of the contracting agency and the Illinois Department of Human Rights for purposes of investigation to ascertain compliance with the Illinois Human Rights Act and the Department's Rules and Regulations.

(7) That it will include verbatim or by reference the provisions of this clause in every subcontract it awards under which any portion of the contract obligations are undertaken or assumed, so that such provisions will be binding upon such subcontractor. In the same manner as with other provisions of this contract, the Contractor will be liable for compliance with applicable provisions of this clause by such subcontractors; and further it will promptly notify the contracting agency and the Illinois Department of Human Rights in the event any subcontractor fails or refuses to comply therewith. In addition, the Contractor will not utilize any subcontractor declared by the Illinois Human Rights Commission to be ineligible for contracts or subcontracts with the State of Illinois or any of its political subdivisions or municipal corporations."

STATEMENTS AND PAYROLLS

The payroll records shall include each worker's name, address, telephone number, social security number, classification, rate of pay, number of hours worked each day, starting and ending times of work each day, total hours worked each week, itemized deductions made, and actual wages paid.

The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work, except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead, the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number). In addition, starting and ending times of work each day may be omitted from the payroll records submitted to the Engineer. The submittals shall be on the Department's form

SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form."

SUBLETTING OR ASSIGNING THE CONTRACT

The requirements of Section VI of FHWA-1273 are hereby made applicable to Secondary Road Plan Projects."

State of Illinois
Department of Transportation

SPECIAL PROVISION FOR SUBLETTING OF CONTRACTS (FEDERAL AID CONTRACTS)

Effective: January 1, 1988
Revised: May 1, 1993

This Special Provision supersedes paragraph VII of Form FHWA 1273, Required Contract Provisions Federal-aid Construction Contracts.

The Contractor shall not sublet, sell, transfer, assign, or otherwise dispose of the contract or contracts or any portion thereof, or of his/her right, title or interest therein, without written consent of the Engineer. In case such consent is given, the Contractor will be permitted to sublet a portion thereof, but shall perform with the Contractor's own organization, work amounting to not less than 50 percent of the total contract cost, except any items designated in the contract as "specialty items" may be performed by subcontract and the cost of any such specialty items so performed by subcontract may be deducted from the total cost before computing the amount of work required to be performed by the Contractor with his/her own organization. Materials purchased or produced by the Contractor must be incorporated into the project by the Contractor's own organization if their cost is to be applied to the 50 percent requirement.

No subcontracts, or transfer of contract, shall in any case release the Contractor of his/her liability under the contract and bonds. All transactions of the Engineer will be with the Contractor. The Contractor shall have a representative on the job at all times when either contract or subcontract work is being performed.

All requests to subcontract shall contain a certification the subcontract agreement exists in writing and physically contains the required Federal and State Equal Employment Opportunity provisions and Labor compliance provisions, including the contract minimum wage requirements. The Contractor shall permit Department or Federal representatives to examine the subcontract agreements upon notice.

State of Illinois
Department of Transportation

SPECIAL PROVISION
FOR
EEO

Effective: July 21, 1978
Revised: November 18, 1980

The requirements of the following provisions written for federally-assisted construction contracts, including all goals and timetables and affirmative action steps, shall also apply to all State-funded construction contracts awarded by the Illinois Department of Transportation.

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246)

1) The offeror's or bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.

2) The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

APPENDIX A

The following goal for female utilization in each construction craft and trade shall apply to all contractors holding federal and federally-assisted construction contracts and subcontracts in excess of $10,000. The goal is applicable to the Contractor's total on-site construction workforce, regardless of whether or not part of that workforce is performing work on a federal, federally assisted or nonfederally related construction contract or subcontract.

Area Covered (Statewide)
Goals for Women apply nationwide.

GOAL	Goal (percent)
Female Utilization	6.9

APPENDIX B

Until further notice, the following goals for minority utilization in each construction craft and trade shall apply to all contractors holding federal or federally-assisted construction contracts and subcontracts in excess of $10,000 to be performed in the respective geographical areas. The goals are applicable to the Contractor's total on-site construction workforce, regardless of whether or not part of that workforce is performing work on a federal, federally-assisted or nonfederally related construction contract or subcontract.

Economic Area	Goal (percent)
083	Chicago, IL

SMSA Counties:	
1600 Chicago, IL -	19.6 IL - Cook, DuPage, Kane
Lake, McHenry, Will	

These goals are applicable to all the Contractor's construction work (whether or not it is federal or federally-assisted) performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with Executive Order 11246 and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the provisions and specifications set forth in its federally assisted contracts, and its efforts to meet the goals established for the geographical area where the contract resulting from this solicitation is to be performed. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, Executive Order 11246 and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3) The Illinois Department of Transportation will provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten working days of award of any construction contract and/or subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. This notification will list the name, address and telephone number of the subcontractor; employer identification number; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the contract is to be performed.

4) As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is the entire State of Illinois for the goal set forth in APPENDIX A and the county or counties in which the work is located for the goals set forth in APPENDIX B.

STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY CONSTRUCTION CONTRACT SPECIFICATIONS (EXECUTIVE ORDER 11246)

1) As used in these specifications:

   a) "Covered area" means the geographical area described in the solicitation from which this contract resulted:

   b) "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority;

c) "Employer identification number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

d) "Minority" includes:

i) Black (all persons having origins in any of the Black African racial groups not of Hispanic origin);

ii) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish Culture or origin, regardless of race);

iii) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and

iv) American Indian or Alaskan Native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership and participation or community identification).

2) Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of $10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3) If the Contractor is participating (pursuant to 41 CFR 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individual or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan.

Each Contractor or Subcontractor participating in an approved Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors or Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.

4) The Contractor shall implement the specific affirmative action standards provided in paragraphs 7a through p of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. Covered Construction contractors performing construction work in geographical areas where they do not have a federal or federally assisted construction contract shall apply the minority and female goals established for the geographical area where the work is being performed. Goals are published periodically in the Federal Register in notice form, and such notices may be obtained from any Office of Federal Contract Compliance Programs office or from Federal Procurement contracting officers. The Contractor is expected to make substantially uniform progress toward its goals in each craft during the period specified.

5) Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has a collective bargaining agreement, to refer either minorities or women shall excuse the contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant thereto.

6) In order for the nonworking training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.

7) The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:

   a) Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of a carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities.

   b) Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.

   c) Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the Union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefore, along with whatever additional actions the Contractor may have taken.

   d) Provide immediate written notification to the Director when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or woman sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

   e) Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under 7b above.

   f) Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO

obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.

g) Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with onsite supervisory personnel such as Superintendents, General Foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h) Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractors and Subcontractors with whom the Contractor does or anticipates doing business.

i) Direct its recruitment efforts, both oral and written, to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship of other training by any recruitment source, the Contractor shall send written notification to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

j) Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth both on the site and in other areas of a Contractor's workforce.

k) Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l) Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m) Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.

n) Ensure that all facilities and company activities are non-segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

o) Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p) Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

8) Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (7a through p). The efforts of a contractor association, joint contractor-union, contractor-community, or other similar group of which the Contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under 7a through p of these Specifications provided that the Contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the Contractor's minority and female workforce participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply however the Contractor's is and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.

9) A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specified minority group of women is underutilized).

10) The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, or national origin.

11) The Contractor shall not enter into any Subcontract with any person or firm debarred from Government contracts pursuant to Executive Order 11246.

12) The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termination and cancellations of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13) The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.8.

14) The Contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out to submit reports relating to the provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice,

trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade rate of pay and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, Contractors shall not be required to maintain separate records.

15) Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., "those under the Public Works Employment Act of 1977 and applicable requirements of Section 1091."

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Compliance with Governmentwide Suspension and Debarment Requirements
XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. Davis-Bacon and Related Act Provisions

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for

debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;

(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. **Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded,"

as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the

certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (DBE)

Effective: September 1, 2000
Revised: August 2, 2011

FEDERAL OBLIGATION. The Department of Transportation, as a recipient of federal financial assistance, is required to take all necessary and reasonable steps to ensure nondiscrimination in the award and administration of contracts. Consequently, the federal regulatory provisions of 49 CFR Part 26 apply to this contract concerning the utilization of disadvantaged business enterprises. For the purposes of this Special Provision, a disadvantaged business enterprise (DBE) means a business certified by the Department in accordance with the requirements of 49 CFR Part 26 and listed in the Illinois Unified Certification Program (IL UCP) DBE Directory.

STATE OBLIGATION. This Special Provision will also be used by the Department to satisfy the requirements of the Business Enterprise for Minorities, Females, and Persons with Disabilities Act, 30 ILCS 575. When this Special Provision is used to satisfy state law requirements on 100 percent state-funded contracts, the federal government has no involvement in such contracts (not a federal-aid contract) and no responsibility to oversee the implementation of this Special Provision by the Department on those contracts. DBE participation on 100 percent state-funded contracts will not be credited toward fulfilling the Department's annual overall DBE goal required by the US Department of Transportation to comply with the federal DBE program requirements.

CONTRACTOR ASSURANCE. The Contractor makes the following assurance and agrees to include the assurance in each subcontract that the Contractor signs with a subcontractor.

> The Contractor, sub recipient, or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The Contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of contracts funded in whole or in part with federal or state funds. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

OVERALL GOAL SET FOR THE DEPARTMENT. As a requirement of compliance with 49 CFR Part 26, the Department has set an overall goal for DBE participation in its federally assisted contracts. That goal applies to all federal-aid funds the Department will expend in its federally assisted contracts for the subject reporting fiscal year. The Department is required to make a good faith effort to achieve the overall goal. The dollar amount paid to all approved DBE companies performing work called for in this contract is eligible to be credited toward fulfillment of the Department's overall goal.

CONTRACT GOAL TO BE ACHIEVED BY THE CONTRACTOR. This contract includes a specific DBE utilization goal established by the Cook County Department of Transportation and Highways. The goal has been included because the Cook County Department of Transportation and Highways has determined that the work of this contract has subcontracting opportunities that may be suitable for performance by DBE companies. The determination is based on an assessment of the type of work, the location of the work, and the availability of DBE companies to do a part of the work. The assessment indicates that, in the absence of unlawful discrimination, and in an arena of fair and open competition, DBE companies can be expected to perform **33%** of the work. This percentage is set as the DBE participation goal for this contract. Consequently, in addition to the other award criteria established for this contract, the Cook County Department of Transportation and Highways will only recommend award this

contract to a bidder who makes a good faith effort to meet this goal of DBE participation in the performance of the work. A bidder makes a good faith effort for award consideration if either of the following is done in accordance with the procedures set for in this Special Provision:

(a) The bidder documents that enough DBE participation has been obtained to meet the goal: or

(b) The bidder documents that a good faith effort has been made to meet the goal, even though the effort did not succeed in obtaining enough DBE participation to meet the goal.

DBE LOCATOR REFERENCES. Bidders shall consult the IL UCP DBE Directory as a reference source for DBE-certified companies. In addition, the Department maintains a letting and item specific DBE locator information system whereby DBE companies can register their interest in providing quotes on particular bid items advertised for letting. Information concerning DBE companies willing to quote work for particular contracts may be obtained by contacting the Department's Bureau of Small Business Enterprises at telephone number (217)785-4611, or by visiting the Department's website at www.dot.il.gov.

BIDDING PROCEDURES. Compliance with this Special Provision is a material bidding requirement. The failure of the bidder to comply will render the bid not responsive.

(a) The bidder shall submit a Disadvantaged Business Utilization Plan on Department forms with the bid.

(b) The Utilization Plan shall indicate that the bidder either has obtained sufficient DBE participation commitments to meet the contract goal or has not obtained enough DBE participation commitments in spite of a good faith effort to meet the goal. The Utilization Plan shall further provide the name, telephone number, and telefax number of a responsible official of the bidder designated for purposes of notification of plan approval or disapproval under the procedures of this Special Provision.

(c) The Utilization Plan shall include a DBE Participation Commitment Statement, for each DBE proposed for the performance of work to achieve the contract goal. All elements of information indicated on the said form shall be provided, including but not limited to the following:
   (1) The names and addresses of DBE firms that will participate in the contract;
   (2) A description, including pay item numbers, of the work each DBE will perform;
   (3) The dollar amount of the participation of each DBE firm participating. The dollar amount of participation for identified work shall specifically state the quantity, unit price, and total subcontract price for the work to be completed by the DBE. If partial pay items are to be performed by the DBE, indicate the portion of each item, a unit price where appropriate and the subcontract price amount;
   (4) DBE Participation Commitment Statements, signed by the bidder and each participating DBE firm documenting the commitment to use the DBE subcontractors whose participation is submitted to meet the contract goal;
   (5) If the bidder is a joint venture comprised of DBE companies and non-DBE companies, the plan must also include a clear identification of the portion of the work to be performed by the DBE partner(s); and,
   (6) If the contract goal if not met, evidence of good faith efforts.

GOOD FAITH EFFORT PROCEDURES. The contract will not be awarded until the Utilization Plan submitted by the apparent successful bidder is approved. All information submitted by the bidder must be complete, accurate and adequately document that enough DBE participation has been obtained or document that good faith efforts of the bidder, in the event enough DBE participation has not been obtained. The Utilization Plan will be approved by the Cook County Department of Transportation and Highways if the Utilization Plan documents sufficient commercially useful DBE work performance to meet the contract goal or the bidder submits sufficient documentation of a good faith effort to meet the contract goal pursuant to 49 CFR Part 26, Appendix A. The Utilization Plan will not be approved by the Cook County Department of Transportation and Highways if the Utilization Plan does not document sufficient DBE participation to meet the contract goal unless the apparent successful bidder documented in the Utilization Plan that it made a good faith effort to meet the goal. This means that the bidder must show that all necessary and reasonable steps were taken to achieve the contract goal. Necessary and reasonable steps are those which, by their scope, intensity and appropriateness to the objective, could reasonably be expected to obtain sufficient DBE participation, even if they were not successful. The Cook County Department of Transportation and Highways will consider the quality, quantity, and intensity of the kinds of efforts that the bidder has made. Mere *pro forma* efforts, in other words, efforts done as a matter of form, are not good faith efforts; rather, the bidder is expected to have taken genuine efforts that would be reasonably expected of a bidder actively and aggressively trying to obtain DBE participation sufficient to meet the contract goal.

(a) The following is a list of types of action that the Cook County Department of Transportation and Highways will consider as part of the evaluation of the bidder's good faith efforts to obtain participation. These listed factors are not intended to be a mandatory checklist and are not intended to be exhaustive. Other factors or efforts brought to the attention of the Cook County Department of Transportation and Highways may be relevant in appropriate cases, and will be considered by the Cook County Department of Transportation and Highways.

(1) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.

(2) Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime Contractor might otherwise prefer to perform these work items with its own forces.

(3) Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.

(4) a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and

suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.

b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also the ability or desire of a bidder to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidders are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable.

(5) Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.

(6) Making efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as required by the recipient or Contractor.

(7) Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.

(8) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.

(b) If the Cook County Department of Transportation and Highways determines that the apparent successful bidder has made a good faith effort to secure the work commitment of DBE companies to meet the contract goal, the Cook County Department of Transportation and Highways will recommend award the contract provided that it is otherwise eligible for award. If the Cook County Department of Transportation and Highway determines that the bidder has failed to meet the requirements of this Special Provision or that a good faith effort has not been made, the Cook County Department of Transportation and Highways will notify the responsible company official designated in the Utilization Plan that the bid is not responsive. The notification shall include a statement of reasons for the determination.

(c) The bidder may request administrative reconsideration of a determination adverse to the bidder within the **five (5) working days** after the receipt of the notification date of the determination by delivering the request to the Cook County Department of

Transportation and Highways, Contract Documents Administrator. Deposit of the request in the United States mail on or before the fifth business day shall not be deemed delivery. The determination shall become final if a request is not made and delivered. A request may provide additional written documentation and/or argument concerning the issues raised in the determination statement of reasons, provided the documentation and arguments address efforts made prior to submitting the bid. The request will be forwarded to the Cook County Department of Transportation and Highways. The Cook County Department of Transportation and Highways will extend an opportunity to the bidder to meet in person in order to consider all issues of documentation and whether the bidder made a good faith effort to meet the goal. After the review by the Cook County Department of Transportation and Highways, the bidder will be sent a written decision within **ten (10) working days** after receipt of the request for consideration, explaining the basis for finding that the bidder did or did not meet the goal or make adequate good faith efforts to do so. A final decision by the Cook County Department of Transportation and Highways that a good faith effort was made shall approve the Utilization Plan submitted by the bidder and shall clear the contract for award. A final decision that a good faith effort was not made shall render the bid not responsive.

CALCULATING DBE PARTICIPATION. The Utilization Plan values represent work anticipated to be performed and paid for upon satisfactory completion. The Cook County Department of Transportation and Highways is only able to count toward the achievement of the overall goal and the contract goal the value of payments made for the work actually performed by DBE companies. In addition, a DBE must perform a commercially useful function on the contract to be counted. A commercially useful function is generally performed when the DBE is responsible for the work and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. The Cook County Department of Transportation and Highways and Contractor are governed by the provisions of 49 CFR Part 26.55(c) on questions of commercially useful functions as it affects the work. Specific counting guidelines are provided in 49 CFR Part 26.55, the provisions of which govern over the summary contained herein.

(a) DBE as the Contractor: 100 percent goal credit for that portion of the work performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontracts to a non-DBE does not count toward the DBE goals.

(b) DBE as a joint venture Contractor: 100 percent goal credit for that portion of the total dollar value of the contract equal to the distinct, clearly defined portion of the work performed by the DBE's own forces.

(c) DBE as a subcontractor: 100 percent goal credit for the work of the subcontract performed by the DBE's own forces, including the cost of materials and supplies, excluding the purchase of materials and supplies or the lease of equipment by the DBE subcontractor from the prime Contractor or its affiliates. Work that a DBE subcontractor in turn subcontracts to a non-DBE does not count toward the DBE goal.

(d) DBE as a trucker: 100 percent goal credit for trucking participation provided the DBE is responsible for the management and supervision of the entire trucking operation for which it is responsible. At least one truck owned, operated, licensed, and insured by the DBE must be used on the contract. Credit will be given for the following:

(1) The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services the lessee DBE provides on the contract.
(2) The DBE may also lease trucks from a non-DBE firm, including from an owner-operator. The DBE who leases trucks from a non-DBE is entitled to credit only for the fee or commission is receives as a result of the lease arrangement.

(e) DBE as a material supplier:
(1) 60 percent goal credit for the cost of the materials or supplies purchased from a DBE regular dealer.
(2) 100 percent goal credit for the cost of materials of supplies obtained from a DBE manufacturer.

(3) 100 percent credit for the value of reasonable fees and commissions for the procurement of materials and supplies if not a regular dealer or manufacturer.

CONTRACT COMPLIANCE. Compliance with this Special Provision is an essential part of the contract. The Cook County Department of Transportation and Highways is prohibited by federal regulations from crediting the participation of a DBE included in the Utilization Plan toward either the contract goal or the Department's overall goal until the amount to be applied toward the goals has been paid to the DBE. The following administrative procedures and remedies govern the compliance by the Contractor with the contractual obligations established by the Utilization Plan. After approval of the Utilization Plan and award of the contract, the Utilization Plan and individual DBE Participation Statements become part of the contract. If the Contractor did not succeed in obtaining enough DBE participation to achieve the advertised contract goal, and the Utilization Plan was approved and contract awarded based upon a determination of good faith, the total dollar value of DBE work calculated in the approved Utilization Plan as a percentage of the awarded contract value shall become the amended contract goal. All work indicated for performance by an approved DBE shall be performed, managed, and supervised by the DBE executing the Participation Statement.

(a) **NO AMENDMENT**. No amendment to the Utilization Plan may be made without prior written approval from the Cook County Chief Procurement Officer. All requests for amendment to the Utilization Plan shall be submitted to the Cook County Office of the Chief Procurement Officer with copies to Cook County Department of Transportation and Highways, Construction Bureau.

(b) **TERMINATION OR REPLACEMENT**. The Contractor shall not terminate or replace a DBE listed on the approved Utilization Plan, or perform with other forces work designated for a listed DBE except as provided in the Special Provision.

(c) **CHANGES TO WORK**. Any deviation from the DBE condition-of-award or contract plans, specifications, or special provisions must be approved, in writing, by the Cook County Chief Procurement Officer as provided elsewhere in the Contract. The Contractor shall notify affected DBEs in writing of any changes in the scope of work which result in a reduction in the dollar amount condition-of-award to the contract. Where the revision includes work committed to a new DBE subcontractor, not previously involved in the project, then a Request for Approval of Subcontractor, Department form BC 260A, must be signed and submitted to the Cook County Department of

Transportation and Highways. If the commitment of work is in the form of additional tasks assigned to an existing DBE subcontract, than a revised Request for Approval of Subcontractor shall be required. However, the Contractor must document efforts to assure that the existing DBE subcontractor is capable of performing the additional work and has agreed in writing to the change.

(d) **ALTERNATIVE WORK METHODS**. In addition to the above requirements for reductions in the condition of award, additional requirements apply to the two cases of Contractor-initiated work substitution proposals. Where the contract allows alternate work methods which serve to delete or create under runs in condition of award DBE work, and the Contractor selects that alternate method or, where the Contractor proposes a substitute work method or material that serves to diminish or delete work committed to a DBE and replace it with other work, then the Contractor must demonstrate one of the following:

(1) That the replacement work will be performed by the same DBE (as long as the DBE is certified in the respective item of work) in a modification of the condition of award; or

(2) That the DBE is aware that its work will be deleted or will experience under runs and has agreed in writing to the change. If this occurs, the Contractor shall substitute other work of equivalent value to a certified DBE or provide documentation of good faith efforts to do so; or

(3) That the DBE is not capable of performing the replacement work or has declined to perform the work at a reasonable competitive price. If this occurs, the Contractor shall substitute other work of equivalent value to a certified DBE or provide documentation of good faith efforts to do so.

(e) **TERMINATION AND REPLACEMENT PROCEDURES**. The Contractor shall not terminate or replace a DBE subcontractor listed in the approved Utilization Plan without prior written consent. This includes, but is not limited to, instances in which the Contractor seeks to perform work originally designated for a DBE subcontractor with its own forces or those of an affiliate, a non-DBE firm, or with another DBE firm. Written consent will be granted only if the Chief Procurement Officer agrees, for reasons stated in its concurrence document, that the Contractor has good cause to terminate or replace the DBE firm. Before transmitting to the Chief Procurement Officer any request to terminate and/or substitute a DBE subcontractor, the Contractor shall give notice in writing to the DBE subcontractor, with a copy to the Chief Procurement Officer and Cook County Department of Transportation and Highways - Construction Bureau, of its intent to request to terminate and/or substitute, and the reason for the request. The Contractor shall give the DBE **five (5) days** to respond to the Contractor's notice. The DBE so notified shall advise the Chief Procurement Officer, Cook County Department of Transportation and Highways – Construction Bureau and the Contractor of the reasons, if any, why it objects to the proposed termination of its subcontract and why the Chief Procurement Officer should not approve the Contractor's action. If required in a particular case as a matter of public necessity, the Chief Procurement Officer may provide a response period shorter than **five (5) days**.

For purposes of this paragraph, good cause includes the following circumstances:

(1) The listed DBE subcontractor fails or refuses to execute a written contract;

(2) The listed DBE subcontractor fails or refuses to perform the work of its subcontract in a way consistent with normal industry standards. Provided, however, that good cause does not exist if the failure or refusal of the DBE subcontractor to perform its work on the subcontract results from the bad faith or discriminatory action of the prime contractor;

(3) The listed DBE subcontractor fails or refuses to meet the prime Contractor's reasonable, nondiscriminatory bond requirements;

(4) The listed DBE subcontractor becomes bankrupt, insolvent, or exhibits credit unworthiness;

(5) The listed DBE subcontractor is ineligible to work on public works projects because of suspension and debarment proceedings pursuant 2 CFR Parts 180, 215 and 1,200 or applicable state law.

(6) You have determined that the listed DBE subcontractor is not a responsible contractor;

(7) The listed DBE subcontractor voluntarily withdraws from the projects and provides to you written notice of its withdrawal;

(8) The listed DBE is ineligible to receive DBE credit for the type of work required;

(9) A DBE owner dies or becomes disabled with the result that the listed DBE contractor is unable to complete its work on the contract;

(10) Other documented good cause that compels the termination of the DBE subcontractor. Provided, that good cause does not exist if the prime Contractor seeks to terminate a DBE it relied upon to obtain the contract so that the prime Contractor can self-perform the work for which the DBE contractor was engaged or so that the prime Contractor can substitute another DBE or non-DBE contractor after contract award.

When a DBE is terminated, or fails to complete its work on the Contract for any reason the Contractor shall make a good faith effort to find another DBE to substitute for the original DBE to perform at least the same amount of work under the contract as the terminated DBE to the extent needed to meet the established Contract goal.

(f) **PAYMENT RECORDS**. The Contractor shall maintain a record of payments for work performed to the DBE participants. The records shall be made available to the Cook County Department of Transportation and Highways for inspection upon request. After the performance of the final item of work or delivery of material by a DBE and final payment therefore to the DBE by the Contractor, but not later than thirty (30) calendar days after payment has been made by the Cook County Department of Transportation and Highways to the Contractor for such work or material, the Contractor shall submit a DBE Payment Agreement on Department form SBE 2115 to Cook County Department of Transportation and Highways – Construction Bureau. If full and final payment has not been made to the DBE, the DBE Payment Agreement shall indicate whether a disagreement as to the payment required exists between the Contractor and the DBE or

if the Contractor believes that the work has not been satisfactorily completed. If the Contractor does not have the full amount of work indicated in the Utilization Plan performed by the DBE companies indicated in the Utilization Plan and after good faith efforts are reviewed, the Cook County Department of Transportation and Highways may deduct from contract payments to the Contractor the amount of the goal not achieved as liquidated and ascertained damages. The Contractor may request an administrative reconsideration of any amount deducted as damages pursuant to subsection (h) of this part.

(g) **ENFORCEMENT**. The Cook County Department of Transportation and Highways reserves the right to withhold payment to the Contractor to enforce the provisions of this Special Provision. Final payment shall not be made on the contract until such time as the Contractor submits sufficient documentation demonstrating achievement of the goal in accordance with this Special Provision or after liquidated damages have been determined and collected.

(h) **RECONSIDERATION.** Notwithstanding any other provision of the contract, including but not limited to Article 109.09 of the Standard Specifications, the Contractor my request administrative reconsideration of a decision to deduct the amount of the goal not achieved as liquidated damages. A request to reconsider shall be delivered to the Cook County Chief Procurement Officer with copies to Cook County Department of Transportation and Highways – Construction Bureau and shall be handled and considered in the same manner as set forth in paragraph (c) of "Good Faith Effort Procedures" of this Special Provision, except a final decision that a good faith effort was not made during contract performance to achieve the goal agreed to in the Utilization Plan shall be the final administrative decision of the Cook County Chief Procurement Officer.

Assist Agencies

ILLINOIS DEPARTMENT OF TRANSPORTATION
Bureau of Local Roads and Streets
201 West Center Court
Schaumburg, IL 60196
847-705-4795
847-705-4203 (Fax)

Moud.Ahmad@illinos.gov

Carnice Carey
Executive Director
Cosmopolitan Chamber of Commerce
30 E. Adams Street, Suite 1050
Chicago, IL 60603
312-786-0212
312-786-9079 (FAX)

ccarey@cosmochamber.com

Mr. Miguel Nogueras
Executive Director
Puerto Rican Chamber of Commerce
2450 West Division
Chicago, IL 60622
773-904-7996
773-583-3118 (FAX)

ILLINOIS ROAD BUILDERS
500 Park Boulevard
Itasca, IL 60143
630-773-1220
630-773-1231 (FAX)

Liz@irtba.org
Annette@irtba.org

TARGET GROUP, INC.
330 South Wells Street
Suite 400
Chicago, IL 60606
312-873-0200
312-873-0299 (FAX)

jwilliams@targetgroupinc.ocm

Ms. Sheila Hill Morgan
Executive Director
CHICAGO MINORITY SUPPLIER DEVELOPEMTN COUNCIL
(C.M.S.D.C.)
105 West Adams
Chicago, IL 60603
312-755-8880
312-755-8890 (FAX)

shillmorgan@chicagomsdc.org

Victor Davis
Contractor Development Program
CHICAGO URBAN LEAGUE
4510 South Michigan Avenue
Chicago, IL 60653
773-451-3559
773-285-7772 (FAX)

twatley@thechicagourbanleague.org

Ms. Beth Doria
FEDERATION of WOMEN CONTRACTORS
5650 South Archer Avenue
Chicago, IL 60638
312-360-1122
312-360-0239 (FAX)

fwcchicago@aol.com

Ms. Joyce Shannahan
Director
INDUSTRIAL COUNCIL of NEARWEST
2023 West Carroll Avenue
Chicago, IL 60612
312-421-3941
312-421-1871 (FAX)

joyce@industrialcouncil.com

D. Lorenzo Padron
Director of Procurement
LATIN AMERICAN CHAMBER of COMMERCE
3512 West Fullerton Avenue
Chicago, IL 60647
773-252-5211
773-252-7065 (FAX)

randrade@latinamericanchamberofcommerce.com

Mr. Frank Aguilar
President
LITTLE VILLAGE 26th STREET AREA CHAMBER OF COMMERCE
3610 West 26th Street
Chicago, IL 60623
773-521-5387
312-521-5387 (FAX)

senortamale@msn.com

Perry Gunn
Executive Director
NORTH RIVER COMMISSION/LADCOR
3403 West Lawrence – Suite 201
Chicago, IL 60625
773-478-0202
773-478-0282

Ms. Angela R. Johnson
National Director of International Trade Bureau
RAINBOW P.U.S.H.
930 East 50th Street
Chicago, IL 60615
773-373-3366
312-373-3571 (FAX)

mturner@rainbowpush.org

Ms. Patricia Showers
Executive Director
UPTOWN CENTER/HULL HOUSE
4520 North Beacon
Chicago, IL 60640
773-561-3500
312-561-3507 (FAX)

croeschley@hullhouse.org

Ms. Hedy Ratner
Executive Director
WOMEN'S BUSINESS DEVELOPMENT CENTER
8 South Michigan
Suite 400
Chicago, IL 60604
312-853-3477
312-853-0145 (FAX)

hratner@wbdc.org

Sharah Garrett
American Council of Engineering Companies of Illinois (ACEC Illinois)
5221 South 6th Street Road
Suite 120
Springfield, IL 62703
217-529-7430

sharah@acecil.org

Cook County Departments

Cook County Office of the Chief Procurement Officer
118 N. Clark Street – Room 1018
Chicago, Illinois 60602

Cook County Department of Transportation and Highways
Contract Documents Administrator
69 W. Washington Street – Suite 2400
Chicago, Illinois 60602

Cook County Department of Transportation and Highways
Construction Bureau
69 W. Washington Street – 23rd floor
Chicago, Illinois 60602

SPECIAL PROVISION
FOR
INSURANCE REQUIREMENTS

Within fourteen (14) days of notification of award, the bidder shall, at its cost, procure and maintain insurance with coverages in amounts not less than (i) governing law, (ii) as specified herein, or (iii) as actually maintained by Contractor. The cost to the Contractor for providing this insurance coverage shall be considered as included in the cost of the contract.

Nothing contained in these insurance requirements is to be construed as limiting the extent of the Contractor's responsibility for payment of damages resulting from its operations under this Contract.

Contractor shall require all Subcontractors to provide the insurance required in this Agreement, or Contractor may provide said coverage for Subcontractors. All Subcontractors are subject to the same insurance requirements as Contractor unless specified otherwise.

The Cook County Department of Risk Management maintains the right to modify, delete, alter or change these requirements.

The Contractor shall maintain insurance as set forth below.

A. Workers Compensation Insurance

In accordance with the Laws of the State of Illinois and including Employer's Liability Insurance with limits not less than the following:

The Workers Compensation policy shall also include the following provisions:

Bodily Injury by accident	$1,000,000 each accident
Bodily Injury by Disease	$1,000,000 policy limit
Bodily Injury by Disease	$1,000,000 each employee

B. Commercial General Liability Insurance

For bodily injury, personal injury and property damage on an occurrence form (ISO Form CG 0001 or equivalent) with limits not less than the following:

Each Occurrence	$1,000,000
General Aggregate per Project	$2,000,000
Products – Completed Operations Aggregate	$2,000,000

i) All Premises and Operations.

ii) Explosion, collapse and underground damage.

iii) Contractual liability for the obligations assumed in the Indemnification and Hold Harmless agreement.

Such policy must contain (i) ISO Additional Insured Endorsements CG 2010 **and** CG 2037 or equivalent, and (ii) severability of interest/separation of insureds' clause. The products and completed operations coverage (including ISO Endorsement CG 2037 or equivalent) must be maintained for a period of two years after final acceptance of the Project.

C. Commercial Automobile Liability Insurance

For bodily injury and property damage arising from the ownership, maintenance or use of owned, hired and non-owned vehicles (ISO Form CA 00 01 or equivalent) with a limit no less than $1,000,000 per accident.

Cook County, its officials and employees shall be listed as additional insureds with respect to operations performed.

D. Excess Liability

Such policy shall be excess over Commercial General Liability, Automobile Liability, and Employer's Liability with limits not less than the following amounts:

Each Occurrence:	$10,000,000
General Aggregate per Project:	$10,000,000

Subcontractors performing work or Services for the Contractor must maintain limits of not less than $5,000,000 with the same terms herein. Cook County, its officials and employees shall be listed as additional insured with respect to operations performed.

E. Contractor's Pollution Liability

Contractor will maintain pollution liability insurance with limits of liability of $1,000,000 each claim and aggregate with a deductible no greater than $100,000 each claim.

The policy will provide coverage for sums the Contractor becomes legally obligated to pay as loss as a result of claims for bodily injury, property damage or clean-up costs caused by a pollution incident. Pollution incidents will include the discharge, dispersal, release or escape of any solid, liquid, gaseous or thermal irritant or contaminant, including but not limited to smoke, vapors, soot, fumes, acids, alkalis, toxic chemicals, medical waste, waste materials, lead, asbestos, silica, hydrocarbons and microbial matter.

If the policy is a 'claims made' form or if any coverage under this policy is written as 'claims made', coverage will be maintained for two years after project completion.

Additional Insured

The required insurance policies, with the exception of the Workers Compensation, must name **Cook County, its officials and employees as additional insureds,** with respect to operations performed. The Commercial General Liability policy shall specifically include **ISO Additional Insured Endorsements CG 2010 and CG 2037 or equivalent**. Contractor's insurance shall be primary and non-contributory with any insurance maintained by such additional insureds.

No other form will be accepted without prior approval of the Cook County Department of Transportation and Highways. All liability policies shall entirely delete ISO endorsements CG21 39 10 93 or similar endorsement or policy provision which limit contractual liability.

As part of the provisions and requirement for this project, other entities may be required to be added as an "additional insured" on the liability insurance of the Contractor. The Contractor shall assure these entities are included as additional insureds.

Waiver of Subrogation Endorsements

All insurance policies must contain a Waiver of Subrogation Endorsement in favor of Cook County.

Qualification of Insurers

All insurers must possess an A.M. Best rating of A- VII or better and be authorized to do business in Illinois. The insurance limits required herein may be satisfied by a combination of primary, umbrella and/or excess liability insurance policies. Companies with ratings lower than (A-) or VII will be acceptable only upon written consent of Superintendent of Transportation and Highways. Upon written request from the Superintendent of Transportation and Highways, Contractor must supply certified copies of the required insurance policies within ten (10) days.

Certificates of Insurance

Within fourteen (14) days of notification of award, the Contractor must provide properly completed certificates of insurance on Acord forms which evidence the required insurance. The certificates must specifically list each of the required

additional insureds and specify that Waiver of Subrogation Endorsements apply. The certificates must be accompanied by the required Commercial General Liability ISO Additional Insured Endorsements CG 2010 **and** CG 2037 (or equivalent).

The receipt of any certificate of insurance does not constitute agreement by the County that the insurance requirements have been fully met or that the insurance policies indicated on the certificate of insurance are in compliance with the insurance required above. Coverage shall be in companies subject to approval of the County.

In no event shall any failure of the County to receive certificates of insurance required hereof or to demand receipt of such Certificates of Insurance be construed as a waiver of Contractor's obligations to obtain insurance pursuant to these insurance requirements. The certificates shall also include the following: **The coverage and limits conform to the minimum required by Article 107.27 of the Illinois Department of Transportation Standard Specifications for Road and Bridge Construction.**

Notice of Cancellation or Non-Renewal

Contractor shall provide the Superintendent of Highways and Transportation with thirty (30) days advance written notice in the event any required insurance will be cancelled, materially reduced or non-renewed. Contractor shall secure replacement coverage to comply with the stated insurance requirements and provide new certificates of insurance to the Superintendent of Transportation and Highways. .

In the event the insurance is cancelled before the completion of the project, the County shall reserve its rights under the contract, including but not limited to its rights under Article 108.07 of the Standard Specifications For Road and Bridge Construction, to order the job shut down until the Contractor obtains the required insurance in the amounts stated herein or, the County may obtain the coverage required and then shall deduct the appropriate premium cost from the monies due the Contractor.

Property Insurance

Contractor is responsible for all loss or damage to personal property (including materials, equipment, tools and supplies) owned, rented or used by Contractor.

SPECIAL PROVISION
FOR
RAILROAD PROTECTIVE LIABILITY INSURANCE

The contractor will be required to carry Railroad Protective Liability and Property Damage Liability Insurance in accordance with Article 107.11 of the Standard Specifications. The limits under this Special Provision are to be not less than $5,000,000.00 combined single limit per occurrence for bodily injury liability and property damage liability with an aggregate limit of $10,000,000.00 over the life of the policy.

NAMED INSURED

Metra

For Information Contact
Marilyn Schlismann
Contracts & Energy Management
547 W. Jackson Blvd.
Chicago, IL 60661-571
312.322.7093

NUMBER AND SPEED OF FREIGHT AND/OR PASSENGER TRAINS

Speed:
Passenger – 79 mph
Freight – 30 mph
No. of Trains:
Weekday – 48 passenger, 6-8 freight
Saturday – 20 passenger, 6-8 freight
Sunday – 16 passenger, 6-8 freight

Basis of Payment - The costs for providing insurance, as noted above, will be paid for as the contract unit price per lump sum for RAILROAD PROTECTIVE LIABILITY INSURANCE.

Approval of Insurance – Within ten (14) calendar days of notice of award, The **ORIGINAL AND ONE CERTIFIED** copy of each required policy shall be submitted for approval, when applicable.

The Contractor will be advised when the Department has received approval of the insurance from the railroad(s). Before any work begins on railroad right-of-way, the Contractor shall submit to the Resident Engineer evidence that the required Railroad Protective Liability Insurance has been approved by the railroads. The Contractor shall also provide the Resident Engineer with the expiration date of each required policy.

SPECIAL PROVISION
FOR
INDEMNIFICATION FOR COOK COUNTY

The Contractor shall indemnify the County of Cook and its commissioners, officials, employees, agents and representatives, and their respective heirs, successors and assigns (the "County") pursuant to the language provided under Section 107.26 of the Standard Specifications for Road and Bridge Construction.

107.26 Indemnification. To the fullest extent permitted by law, the Contractor shall be responsible for any and all injuries to persons or damages to property due to the activities of the Contractor, subcontractors, licensees, invitees, suppliers, agents, or employees arising out of, incident to, or resulting from performance of the contract, or any activity in connection therewith. The Contractor shall indemnify and hold harmless the County of Cook and its commissioners, officials, employees, agents and representatives, and their respective heirs, successors and assigns, from any and all claims, lawsuits, actions, costs, and fees (including reasonable attorney fees and expenses) of every nature or description, arising from, growing out of, or connected with the work, or on account of or in consequence of any neglect in safeguarding the work or on account of or in consequence of using unacceptable materials in constructing the work or because of any act or omission, neglect, or misconduct of the Contractor, its officers, employees, agents, its subcontractor, or subcontractors licensees, invitees, or anyone directly or indirectly employed by them, and/or anyone for whose acts they may be liable or because of any claims or amount recovered by reason of any infringement of any patent, trademark, or copyright or by reason of the violation of any law, ordinance, order or decree. This obligation is binding on the Contractor without regard to whether or not such claim, damage, loss, or expense is caused in part by the act, omission, or negligence of the County and its commissioners, officials, employees, agents and representatives, and their respective heirs, successors and assigns.

In claims against the County by an employee of the Contractor, its officers, employees, agents, its subcontractor, or subcontractors licensees, invitees, or anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification herein shall not be limited by a limitation on amount or type of damages payable by or for the Contractor or subcontractor under any employee benefits act including but not limited to the Worker's Compensation Act.

In the event any such claim, lawsuit, or action is asserted, any such money due the Contractor under and by virtue of the contract as shall be deemed necessary by the County for the payment thereof, may be retained by the County for said purpose, or in case no money or insufficient money is due to satisfy such claim, lawsuit, or action, the Contractor's Surety shall remain liable for any payment therefore until any such lawsuit, action, or claim has been settled or has been fully judicially determined and satisfied.

No inspection by the County, its employees or agents shall be deemed a waiver by the County of full compliance with the requirements of the contract. This indemnification shall not be limited by any Performance Bond or insurance protection required of the Contractor in the contract.

SPECIAL PROVISION
FOR
JOINT VENTURES

Contractors submitting a bid as a joint venture shall comply with the following procedures:

1) Contractors may combine their available bidding capacity for a single contract to bid as a joint venture.

2) The joint venture shall be indicated by the filing of a ***Joint Venture Minimum Declaration of Work*** for each of the contracts for which joint venture approval is sought. It identifies the managing partner and indicated the kind and the percentage of work to be performed by each joint venture partner with its own workforce and resources other than work reserved to meet any disadvantage business goal advertised in the contract. The form indicated the joint venture agreement shall be included in the bid. In addition, each joint venture partner firm shall submit an ***Affidavit of Availability***. The ***Joint Venture Minimum Declaration of Work*** and all ***Affidavits of Availability*** **must be included in the bid.** The proposed joint venture shall not be approved if the establishment of a joint venture would unduly restrict competition. A determination that a proposed venture would unduly restrict competition is limited to any of the following reasons:

   a) That the proposed joint venture would consist of more than three (3) qualified contractors.

   b) That the ***Joint Venture Minimum Declaration of Work*** indicated that any one of the proposed joint ventures partners will perform less than ten percent of the non-disadvantage business work with its own workforce and resources.

   c) That for letting items estimates by the Department to be bid at less than $1,000,000.00 more than one of the proposed joint venture partners has the individual qualification ratings and bid the item without the approval of the venture. This determination shall not apply to joint ventures between firms having fifty-one percent or more common controlling ownership or on items where the estimated quantity of asphalt exceeds 10,000 tons or concrete exceeds 5,000 cubic yards. Each proposed joint venture shall submit, with the bid, a ***Joint Venture Certificate of Explanation and Justification*** for each of the contracts estimated at less than $1,000,000.00 for which joint venture approval is sought. The form indicated the circumstances which apply to the joint venture. That is there fifty-one percent (51%) or more common controlling ownership, or does one or more parties to the joint venture not have the financial capacity, work capacity or work categories to complete the project. The ***Joint Venture Certificate of Explanation*** **must be included in the bid.**

3) Contractors whose financial ratings are based upon unaudited financial statements will not be permitted to joint venture with each other to bid contracts which are estimated to exceed $350,000.00. However, such contractors may be permitted to joint venture with contractors who have a financial rating based upon an audited statement to bid contracts estimated to exceed $350,000.00.

4) If a joint venture work rating is limited by its maximum financial rating, the full value of the computed work rating will be used in analyzing the joint venture approval request. However, the combined maximum work rating in any category shall not exceed the combined maximum financial rating of the joint venture.

5) If an approved joint venture is awarded a contract, the kind and percentage of work indicated on the ***Joint Venture Minimum Declaration of Work*** may be amended as many times as necessary by the contractor provided that each partner of the approved joint venture performs at least ten percent of the nondisadvantaged work with its own workforce and resources.

Copies of all required Joint Venture Forms are attached.

Please note that signed and notarized originals of all required Joint Venture Forms mentioned above **must be included in the bid.** This includes ***Affidavits of Availability*** for all parties to the joint venture.

JOINT VENTURE FORMS

Qualified contractors wishing to combine bidding capacity and bid items as joint ventures must submit the appropriate properly completed forms and include them in their bid. The required joint venture forms include: (1) the ORIGINAL *Affidavit of Availability* (BC 57); (2) the ORIGINAL *Joint Venture Minimum Declaration of Work*; and (3) the ORIGINAL *Joint Venture Certificate of Explanation and Justification.*

COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
Joint Venture Certificate of Explanation & Justification

Bid Proposal Submission Date: _____
Item No.: _____
Joint Venture Name: _____
Managing Party: _____

Firm #1

Name: _____

Address: _____

Firm #2

Name: _____

Address:-_____

Firm #3

Name: _____

Address: _____

Instructions:

Indicate the circumstances which apply to the Joint Venture.

1) One or more firms do not have the required financial capacity.

Firm #1 Firm #2 Firm #3

Does not have sufficient available prequalification financial rating to perform the work.

2) One or more firms do not have the required work capacity.

Firm #1 Firm #2 Firm #3

Does not have sufficient available prequalification work ratings to perform fifty percent of the work.

3) One or more firms do not perform work in a majority of work categories required to complete the project.

Work categories not performed by the firm:

Firm #1 _____

Firm #2 _____

Firm #3 _____

4) Fifty-one percent (51%) common controlling ownership between firms.

Firm #1 Firm #2 Firm #3

has attached statement indicating the relationship of the firms.

5) Estimated quantity of asphalt for this item exceeds 10,000 tons.

6) Estimated quantity of concrete exceeds 5,000 cubic yards.

7) Estimated costs of project are less than $1,000,000.

_____

I/WE being duly sworn do hereby declare the explanation and justification to be a true and correct statement.

I, WE being duly sworn, do hereby declare the explanation and justification to be a true and correct statement.

Firm #1
Name _____ Title _____
(Print)

_____
Signature (Proprietor, Partner, Officer or Director)

Subscribed and sworn to before me this _____ day of _____, 20 ___. (Notary Seal)

_____ My commission expires on _____
Notary Public

Firm #2
Name _____ Title _____
(Print)

_____
Signature (Proprietor, Partner, Officer or Director)

Subscribed and sworn to before me this _____ day of _____, 20 ___. (Notary Seal)

_____ My commission expires on _____
Notary Public

Firm #3
Name _____ Title _____
(Print)

_____
Signature (Proprietor, Partner, Officer or Director

Subscribed and sworn to before me this _____ day of _____, 20 ___. (Notary Seal)

_____ My commission expires on _____
Notary Public

This form must be submitted with the bid.

COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
Joint Venture Minimum Declaration of Work

Bid Proposal Submission Date: _____
Item No.: _____
Joint Venture Name: _____
Managing Party: _____

Firm #1

Name: _____

Address: _____

Firm #2

Name: _____

Address: _____

Firm #3

Name: _____

Address: _____

Instructions:

Indicate the percentage of work to be performed by each firm with their own forces.

	Firm #1	Firm #2	Firm #3
Earthwork	_____	_____	_____
Portland Cement Concrete Paving	_____	_____	_____
Bituminous Plant Mix	_____	_____	_____
Bituminous Aggregate Mixtures	_____	_____	_____
Miscellaneous Bituminous Paving	_____	_____	_____
Cleaning and Sealing Cracks & Joints	_____	_____	_____
Soil Stabilization and Modification	_____	_____	_____
Aggregate Bases and Surfaces	_____	_____	_____
Highway, Railroad & Waterway Structures	_____	_____	_____
Drainage	_____	_____	_____
Electrical	_____	_____	_____
Cover & Seal Coats	_____	_____	_____
Slurry Applications	_____	_____	_____
Miscellaneous Concrete Construction	_____	_____	_____
Landscaping	_____	_____	_____
Seeding & Sodding	_____	_____	_____
Vegetation Spraying	_____	_____	_____
Tree Trimming & Selective Tree Removal	_____	_____	_____

Fencing	_____	_____	_____
Guardrail	_____	_____	_____
Grouting	_____	_____	_____
Painting	_____	_____	_____
Signing	_____	_____	_____
Paint Pavement Marking	_____	_____	_____
Thermoplastic Pavement Marking	_____	_____	_____
Epoxy Pavement Marking	_____	_____	_____
Installation of Raised Pavement Markers	_____	_____	_____
Pavement Texturing & Surface Removal	_____	_____	_____
Cold Milling, Planning & Rototilling	_____	_____	_____
Erection	_____	_____	_____
Demolition	_____	_____	_____
Other	_____	_____	_____

I, WE being duly sworn, do hereby declare the explanation and justification to be a true and correct statement.

Firm #1

Name _____ Title _____
(Print)

_____
Signature (Proprietor, Partner, Officer or Director)

Subscribed and sworn to before me this _____ day of _____, 20 ___. (Notary Seal)

_____ My commission expires on _____
Notary Public

Firm #2

Name _____ Title _____
(Print)

_____
Signature (Proprietor, Partner, Officer or Director)

Subscribed and sworn to before me this _____ day of _____, 20 ___. (Notary Seal)

_____ My commission expires on _____
Notary Public

Firm #3

Name _____ Title _____
(Print)

_____
Signature (Proprietor, Partner, Officer or Director

Subscribed and sworn to before me this _____ day of _____, 20 ___. (Notary Seal)

_____ My commission expires on _____
Notary Public

This form must be submitted with the bid.

SPECIAL PROVISION
FOR
PROPOSAL AGREEMENTS
ADDENDUM RECEIPT

The receipt of the following addenda to the drawings and/or specification is acknowledged:

Addendum No. 1
Dated 3/6/14

Addendum No. 2
Dated 3/11/14

Addendum No._____
Dated _____

Addendum No._____
Dated _____

Addendum No._____
Dated _____

NOTE: These Addenda form a part of the Bidding and Contract Documents and modify the Original Documents for this Contract. Receipt of these Addenda shall be acknowledged above. Failure to do so may subject the Bidder to disqualification.

SPECIAL PROVISION
FOR
COMBINATION BIDDING PROCESS

All references to Sections or Articles in this specification shall be construed to mean a specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Cook County Department of Transportation and Highways.

Combination Bids. The projects listed below with their individual WORKING DAYS and CALENDAR DAYS shall be let in combination:

PROJECT	SECTION	WORKING DAYS	CALENDAR DAYS

A Combination Bid is a total bid received on 2 or more proposals. No Combination Bids other than those specifically set up by the Department will be considered. Separate proposal forms will be issued for each project in the combination so bids may be submitted on the combination as well as on separate units of the combination. The department reserves the right to make the awards on combination bids or separate bids to the best advantage of the Department.

If a Combination Bid is submitted on 2 or more proposals, separate proposals on each individual contract shall also be submitted, and unless separate proposals are submitted, the Combination Bid will not be considered. If the bidder desires to submit a Combination bid, the bidder shall state, in the place provided in the proposal form, the amount of the Combination Bid for the entire combination.

If a Combination Bid is submitted on any stipulated combination, and errors are found to exist in computing the gross sum bid on any one or more of the individual proposals, corrections shall be made, by the Department and the amount of the Combination Bid shall be corrected so that it will be in the same proportion to the sum of the corrected gross sum bid as the Combination Bid submitted was to the sum of the gross bid submitted.

The following provisions shall govern combination bidding:

1) A Combination Bid which is submitted for 2 or more proposals and awarded on that basis shall have the bid prorated against each proposal in proportion to the bid submitted for each proposal.

2) Separate contracts shall be executed for each proposal included in the combination.

3) The proposal guaranties which accompany the individual proposals making up the combination will be considered as also covering the Combination Bid.

4) The completion date for all contracts awarded on a Combination Bid shall be the latest completion date designated for any one or more of the contracts included in the combination, unless otherwise provided in the contract.

5) Contracts awarded in combination for the projects above shall have the WORKING DAYS revised to _____WORKING DAYS, and the CALENDAR DAYS revised to _____CALENDAR DAYS. The "Daily deduction" rate in the Traffic Control Deficiency Deduction Special Provision shall be based on the REVISED CALENDAR DAYS stated above.

6) The Contractor, at his option, may start one project or all projects. WORKING DAYS then shall start as specified in Article 108.04 of the Standard Specifications for Road and Bridge Construction and shall continue from that day forward until all projects are completed.

7) An extension of time for any one or more contracts awarded on a Combination Bid shall automatically extend all contracts awarded on the combination.

8) In the event the Contractor fails to complete any one or all the contracts on the Combination Bid by the contract completion date plus any authorized extension, or the contract working days plus any authorized extension, the liquidated damages shall be determined from the schedule of deductions for each day of the overrun in the contract time in Article 108.09 in the Standard Specifications for Road and Bridge Construction, based on the Combination Bid total, and shall be computed on the combination and prorated against the 2 or more individual contracts based on the dollar value of each contract.

9) The Plans and Special Provisions for each separate contract shall be construed separately for all requirements, except as described in section 1 through 8 listed above.

SPECIAL PROVISION
FOR
PROMPT PAY MECHANISMS (FEDERAL AID)

Federal regulations found in 49 CFR Part 26.29 mandate the Cook County Department of Transportation and Highways to establish a contract clause to require contractors to pay subcontractors for satisfactory performance of their subcontracts within a specific number of days after receipt of each payment made to the contractor, and to require the prompt return of retainage withheld from subcontractors.

This Special Provision establishes the required Federal contract clause, and adopts a fifteen (15) day requirement for the purpose of compliance with the federal regulation regarding payments to subcontractors.

This contract is subject to the following payment obligations:

"As partial payments are made to the contractor in accordance with Article 109.07 of the Standard Specifications for Road and Bridge Construction, the contractor shall make corresponding partial payment within fifteen (15) calendar days to each subcontractor in proportion to the work satisfactorily completed by each subcontractor. The proportionate amount of partial payment due to each subcontractor shall be determined by the quantities measured or otherwise determined as eligible for payment by the Cook County Department of Transportation and Highways included in the partial payment to the contractor. Subcontractors shall be paid in full, including the return of any retainage previously withheld, within fifteen (15) calendar days after the subcontractor's work has been satisfactorily completed."

This Special Provision does not create any rights in favor of any subcontractor against the County of Cook or authorize any cause of action against the County of Cook on account of any payment, nonpayment, delayed payment or interest claimed by application of this Prompt Payment Special Provision. The Cook County Department of Transportation and Highways will neither determine the reasonableness of any cause for delay of payment nor enforce any claim to payment, including interest. Moreover, the Cook County Department of Transportation and Highways will not approve any delay or postponement of the fifteen (15) day requirement. State law creates remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly, performed or material furnished. These remedies are lien against public funds set forth in Section 23© of the Mechanics Lien Act, 770 ILCS 60/23©, and a recovery on the contractors payment bond in accordance with the Public Construction Bond Act, 30 ILCS 550.

SPECIAL PROVISION
FOR
CONTRACT CLAIMS

All References to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Cook County Department of Transportation and Highways.

109.09 Contract Claims. Revise the second sentence of subparagraph (a) of Article 109.09 to read:

"All claims shall be submitted to the Engineer."

Revise subparagraph (e) of this Article to read:

"Procedure. The department provides three administrative levels for claims review:

Level I	Resident Engineer
Level II	Bureau Chief, Construction Bureau
Level III	Superintendent of Transportation and Highways

All Claims shall first be submitted at Level I. This Engineer shall consider all information submitted with the claim within 90 days after receipt. Claims not conforming to this Article will be returned without consideration. The Resident Engineer may schedule a claim presentation meeting if in the Resident Engineer's judgment such a meeting would aid in resolution of the claim, otherwise a decision will be based on the claim documentation submitted. If a decision is not rendered within 90 days, or if the Contractor disputes the decision, an appeal to Level II shall be made by the Contractor. An appeal to Level II shall be made by the Contractor in writing to the Resident Engineer within 45 days after the date of the Level I decision, and shall include two (2) additional copies of the claim and supporting documentation. Review of the claim at Level II shall be conducted as a full evaluation of the claim. A claim presentation meeting may be schedule if the Bureau Chief, Construction Bureau determines that such a meeting would aid in the resolution of the claim, otherwise a decision will be made on the claim documentation submitted. If a Level II decision is not rendered within 90 days after receipt of the written appeal, or if the Contractor disputes the decision, an appeal at Level III shall be made in writing to the Bureau Chief, Construction Bureau, within 45 days of the date of the Level II decision. Review of the claim at Level III shall be conducted as a full evaluation of the claim. A claim presentation meeting may be scheduled if the Superintendent of Transportation and Highways determines that such a meeting would aid in resolution of the claim, other a decision will be based on the claim documentation submitted. A Level III final decision will be rendered within 90 days of receipt for appeal.

SPECIAL PROVISION

FOR

PRE-CONSTRUCTION CONFERENCE

After the award of the contract and before construction is started, a conference shall be held at a time and place to be designated by the County.

The purpose of the conference shall be to co-ordinate the work to be performed and adopt a schedule of operations.

The conference will be attended by representatives of the participating agencies together with the public and private agencies whose facilities are involved in the construction of the project.

SPECIAL PROVISION
FOR
MOBILIZATION

This Special Provision amends the provisions of Section 671 of the Standard Specifications for Road and Bridge Construction and shall be construed to be a part thereof, superseding any conflicting provisions thereof applicable to the work under the contract.

671 Mobilization. Revise the Article to read:

671.01 Description. This work shall consist of preparatory work and operations necessary for the movement of personnel, equipment, supplies, and incidentals to the project site; for the establishment of offices, buildings, and other facilities necessary for work on the project; and for all other work or operations which must be performed or costs incurred when beginning work on the project.

671.02 Basis of Payment. Upon execution of the contract and a written letter from the Contractor requesting mobilization, three percent of the total contract bid will be paid as the original mobilization payment. The three percent will be recovered according to the following schedule.

1) When 10 percent or more of the original contract amount is earned, 1/5 of the original mobilization payment will be deducted from the current pay voucher.

2) When 20 percent or more of the original contract amount is earned, a cumulative 2/5 of the original mobilization payment will be deducted from the current pay voucher.

3) When 30 percent or more of the original contract amount is earned, a cumulative 3/5 of the original mobilization payment will be deducted from the current pay voucher.

4) When 40 percent or more of the original contract amount is earned, a cumulative 4/5 of the original mobilization payment will be deducted from the current pay voucher.

5) When 50 percent or more of the original contract amount is earned, the remaining balance of the original mobilization payment will be deducted from the current pay voucher.

SPECIAL PROVISION
FOR
CONSTRUCTION AIR QUALITY
DIESEL VEHICLE EMISSIONS CONTROL
(GREEN CONSTRUCTION ORDINANCE)

Description. Diesel Vehicle Emissions Control. The reduction of construction air emissions shall be accomplished by using cleaner burning diesel fuel. All equipment on the jobsite as defined by section 30-952 (a) of the Cook County Green Construction Ordinance (ORDINANCE) shall be required to use Ultra Low Sulfur Diesel fuel (ULSD) exclusively (15 ppm sulfur content or less). Equipment shall include any "rental" equipment. In addition, the Contractor is required to comply with section 30-954 -3(c) related to engine idling.

Diesel powered equipment in non-compliance will not be allowed to be used on the project site, and is also subject to adjudication in accordance with the attached Ordinance. Liquidated damages as per section 30-955 (c) of the ORDINANCE will not apply until such time as the level 2 or 3 controls are phased in.

The Contractor is required to submit a list of equipment to be used on the project to the Cook County Department of Environmental Control (DEPARTMENT), as stated in section 30-954(a) and (b) of the ORDINANCE, and shall copy the Cook County Department of Transportation and Highways - Construction Bureau on that submittal. The 30 day submittal stipulation cited in section 30-954(a) of the ORDINANCE will be enforced. The Contractor may not begin work on the project unless acknowledgement by the DEPARTMENT of their receipt of the list is provided to the Construction Bureau of the Cook County Department of Transportation and Highways. At this time, the list will be used for statistical data only. The Contractor is not required to meet portions of the ordinance related to level 2 or 3 controls as outlined in the ORDINANCE until such time as stipulated in the ordinance. If additional equipment is to be used on a project that was not on the original equipment list submitted to the DEPARTMENT, the Contractor must follow the same procedure as outlined above. Short term usage of equipment shall be as stated in section 30-952(3)(c)(1) of the ORDINANCE.

The Contractor shall submit copies of monthly summary reports to the DEPARTMENT and include certified copies of the ULSD fuel delivery slips for diesel fuel delivered to the jobsite for the reporting time period, noting the quantity of diesel fuel used.

The ORDINANCE is attached and made a part of this contract. Contact information for the Department of Environmental Control is given below.

Basis of Payment. Any costs associated with compliance with this special provision and the Green Construction Ordinance shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed.

Cook County Department of Environmental Control
69 West Washington Street Room 1900
Chicago, IL 60602
Re: Cook County Green Construction Ordinance
Phone: 312-603-8200

09-0-36

ORDINANCE

Sponsored by

THE HONORABLE TODD H. STROGER, PRESIDENT

AND ROBERTO MALDONADO, JOAN PATRICIA MURPHY AND PETER N. SILVESTRI

COUNTY COMMISSIONERS

Co-Sponsored by

THE HONORABLE JOHN P. DALEY, ELIZABETH "LIZ" DOODY GORMAN,

JOSEPH MARIO MORENO, DEBORAH SIMS, ROBERT B. STEELE

AND LARRY SUFFREDIN, COUNTY COMMISSIONERS

COOK COUNTY GREEN CONSTRUCTION ORDINANCE

BE IT ORDAINED, by the Cook County Board of Commissioners that Chapter 30 Environment, Article IX Green Construction, Sections 30-950 through 30-955 of the Cook County Code is hereby enacted as follows:

ARTICLE IX. GREEN CONSTRUCTION

Sec. 30-950. Board of Commissioners findings.

a) Diesel exhaust particle pollution poses a clear and present health risk to the people of Cook County. The United States Environmental Protection Agency has classified diesel exhaust as a likely human carcinogen, and has identified diesel particulate matter and diesel exhaust organic gases as toxic air pollutants. Diesel exhaust is also a prime contributor to airborne fine particle pollution that is linked to premature death and other serious cardiovascular and pulmonary problems such as heart attacks, abnormal heart rhythms, atherosclerosis, stroke, asthma attacks, permanent respiratory damage and retardation of lung growth in children.

b) Cook County is a USEPA designated non-attainment area for fine particulate matter pollution.

c) The health impacts from diesel emissions particularly affect children, the elderly, and people with weakened immune systems.

d) Particularly high concentrations of diesel emissions often occur in heavily traveled transportation corridors, intermodal yards, bus depots, and construction sites; these diesel "hot spots" often are found in densely populated, urban areas, disproportionately impacting ethnic minorities and people of lower economic status.

e) Diesel engine crankcases also are a source of emissions that can seep into the cabin and expose vehicle drivers and passengers to harmful diesel emissions.

f) Diesel exhaust also contains black carbon emissions, which contribute to global climate change.

g) Reduction of diesel emissions can help address these human health and environmental problems.

h) The United States Environmental Protection Agency has enacted requirements over the past few yeas requiring the substantial reduction of emissions from new diesel engines in both heavy duty highway vehicles and land-based non-road equipment. However, these regulations do not apply to any of the over 11 million existing diesel engines in the United States, most of which emit substantially more pollution and often remain in service for 10 to 30 years, depending on the type of engine and equipment.

i) Practical, cost-effective measures to substantially reduce diesel particulate emissions are available today, and can be applied to many existing diesel engines. The same technology that limits diesel pollution from new diesel engines can be retrofitted onto existing engines or applied in new replacement engines to reduce diesel emissions by 85% or better.

j) Therefore, the purpose of this ordinance is to minimize the public health risks from exposure to diesel particulate emissions as expeditiously as practicable.

Sec. 30-951. Definitions.

CARB means the California Air Resources Board.

County, as used in this chapter (with the exception of the use of the words to describe or identify the Government or Board of Commissioners thereof), means all of the territory in the County exclusive of the City of Chicago.

Department means the Cook County Department of Environmental Control.

Fleet means one or more diesel vehicles or mobile or stationary diesel engines owned or operated by the same person or group of related persons.

Heavy duty diesel vehicle means a motor vehicle with a gross vehicle weight rating of at least 8,500 pounds that is powered by a diesel engine.

Level 1 Control means a Verified Diesel Emission Control Device that achieves a particulate matter (PM) emission reduction of 25% or more from uncontrolled engine emission levels.

Level 2 Control means a Verified Diesel Emission Control Device that achieves a particulate matter (PM) emission reduction of 50% or more from uncontrolled engine emission levels.

Level 3 Control means a Verified Diesel Emission Control Device that achieves a particulate matter (PM) emission reduction of 85% or more from uncontrolled engine emission levels, or that reduces emissions to less than or equal to 0.01 grams of PM per brake horsepower-hour. Level 3 Control includes repowering or replacing the existing diesel engine with an engine meeting USE PA's 2007 Heavy-duty Highway Diesel

Standards (66 Fed. Reg. 5002), or in the case of a non-road engine, an engine meeting the USE PA's Tier 4 Nonroad Diesel Standards (69 Fed. Reg. 38958); Level 3 Control also includes new diesel engines meeting said emissions standards.

Motor vehicle means any self-propelled vehicle designed for transporting persons or property on a street or highway, including an on-road diesel vehicle.

Nonroad engine means an internal combustion engine (including the fuel system) that is not used in a motor vehicle or a vehicle used solely for competition, or that is not a stationary source, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

Nonroad Vehicle means a vehicle or equipment that is powered by a nonroad engine, fifty horsepower and greater, and that is not a motor vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers and similar equipment; non-road vehicles do not include locomotives or marine vessels.

Prime Contractor means any person or business entity that enters into a public works contract with Cook County.

Public Works Contract means a contract, budgeted at $2,000,000 or more, with a County agency for a construction program or project bid by Cook County involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; a contract with a County agency for the preparation for any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; or a contract with a County agency for any final work involved in the completion of any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge.

Stationary Generators means a non-mobile machine that uses diesel fuel to produce electrical energy.

Subcontractor means any person or business entity that enters into a contract with a Prime Contractor as defined herein to perform work on a public works contract with Cook County.

Ultra low sulfur diesel fuel means diesel fuel that has a sulfur content of no more than fifteen parts per million.

US EPA means the United States Environmental Protection Agency.

Verified diesel emission control device means:

a) an emission control device or strategy that has been verified to achieve a specified diesel PM reduction by US EPA or CARB; or

b) replacement or repowering with an engine that is certified to specific PM emissions performance by USE PA or CARB.

Sec. 30-952. Emission reduction.

a) Immediately after the effective date of this ordinance, any solicitation for a public works contract and any contract entered into as a result of such solicitation shall include a specification that all contractors in the performance of such contract shall use Ultra Low Sulfur Diesel fuel for diesel motor vehicles, nonroad vehicles, and stationary generators used in the performance of the contract.

b) Beginning January 1, 2 014, for Prime Contractors, and beginning January 1, 2016 for Subcontractors, any solicitation for a public works contract and any contract entered into as a result of such solicitation shall include a specification that a Prime Contractor and all Subcontractors in the performance of such contract shall not operate any heavy-duty diesel vehicle in the performance of a public works contract unless that vehicle has installed Level 3 Controls and unless such controls are properly maintained and operating (as provided by regulations promulgated pursuant to this act). Except that, upon provision by the Prime Contractor or Subcontractors to the agency of appropriate and sufficient documentary evidence:

(1) Subsection (b) shall not apply to any heavy-duty diesel vehicle on the construction site working three days or less over the life of the project.

(2) Subsection (b) shall not apply to any heavy-duty diesel vehicle with respect to which the Department makes a written finding that such vehicle cannot be retrofit with Level 3 Controls, in which case such fleet owner or operator shall install Level 2 Controls that are available and appropriate for such vehicle as determined by the Department. If the Department makes a written finding that any such vehicle cannot be retrofit with Level 2 controls, said vehicle shall be retrofit with Level 1 Controls that are available and appropriate for such vehicle as determined by the Department.

(3) Any heavy-duty diesel vehicle that has operational Level 2 Controls installed prior to the effective date of this act shall have an additional one year to meet the requirements of Subsection (b).

c) Within two years after the effective date of this ordinance, any solicitation for a public works contract and any contract entered into as a result of such solicitation shall include a specification that all contractors in the performance of such contract shall not operate any diesel nonroad vehicle in the performance of a public works contract unless that vehicle has installed Level 2 Controls and unless such controls are properly maintained and operating (as provided by regulations promulgated pursuant to this act). Except that, upon provision by the contract or to the agency of appropriate and sufficient documentary evidence:

(1) Subsection (c) shall not apply to any diesel nonroad vehicle on the construction site working three days or less over the life of the project.

(2) Subsection (c) shall not apply to any diesel nonroad vehicle with respect to which the Department makes a written finding that such vehicle cannot be retrofit with Level 2 Controls, in which case such fleet owner or operator shall install Level 1 Controls that are available and appropriate for such vehicle as determined by the Department.

(3) Any diesel nonroad vehicle that has operational Level 1 Controls installed prior to the effective date of this act shall have an additional one year to meet the requirements of Subsection (c).

d) Beginning January 1, 2014, for Prime Contractors, and beginning January 1, 2016 for Subcontractors, any solicitation for a public works contract and any contract entered into as a result of such solicitation shall include a specification that a Prime Contractor and all Subcontractors in the performance of such contract shall not operate any diesel nonroad vehicle in the performance of a public works contract unless that vehicle has installed Level 3 Controls and unless such controls are properly maintained and operating (as provided by regulations promulgated pursuant to this act). Except that, upon provision by the Prime Contractor or Subcontractors to the agency of appropriate and sufficient documentary evidence:

(1) Subsection (d) shall not apply to any diesel nonroad vehicle on the construction site working three days or less over the life of the project.

(2) Subsection (d) shall not apply to any diesel nonroad vehicle with respect to which the Department makes a written finding that such vehicle cannot be retrofit with Level 3 Controls, in which case such fleet owner or operator shall install Level 2 Controls that are available and appropriate for such vehicle as determined by the Department.

(3) Any diesel nonroad vehicle that has operational Level 2 Controls installed prior to the effective date of this act shall have an additional one year to meet the requirements of Subsection (d).

Sec. 30-953. Costs.

All costs associated with meeting these requirements are incidental to the overall contract. No additional time or monies will be granted to the Prime Contractor for compliance with these requirements and any associated regulations.

Sec. 30-954. Compliance.

a) Thirty days before beginning work, the Prime Contractor shall submit to the Department for approval a list of all heavy-duty diesel vehicles, nonroad vehicles, and stationary generators to be used on the project. The list shall include the following:

(1) Prime Contractor and Subcontractor name and address, plus contact person responsible for the vehicles or equipment.

(2) Equipment type, manufacturer, engine model year, engine certification (Tier rating), ECM calibration, horsepower, plate, serial number, and expected fuel usage and/or hours of operation.

(3) For the pollution control technology installed: technology type, serial number, make, model, manufacturer, EPA/CARB verification number/level, and installation date.

b) If the Prime Contractor subsequently needs to bring on site equipment not on the list, the Prime Contractor shall submit the request in writing for prior approval. Additional equipment shall comply with all contract conditions.

c) During periods of inactivity, idling of diesel on road motor vehicles and nonroad vehicles shall be minimized and shall not exceed the time allowed under state and local laws.

d) Any public works contract shall provide for enforcement of the contract provisions required by Section 3 and penalties for noncompliance of such provisions.

Sec. 30-955. Enforcement.

a) Any solicitation for a public works contract subject to the provisions of this section and any contract entered into as a result of such solicitation shall include provisions authorizing independent monitoring and inspection of the Prime Contractor and Subcontractor's compliance with the requirements of this section and requiring that the Prime Contractor and Subcontractor comply with this section. The Prime Contractor shall be liable for a fee of $200 for the review of Prime Contractor and Subcontractor's compliance with the provisions of this section, and the County may withhold and deduct the fee from monies otherwise due the Prime Contractor.

b) All vehicles and equipment to which these requirements are applicable will be subject to random inspections to ensure full compliance with these requirements. If any equipment is found to be non-compliant, the Prime Contractor, Subcontractor or Supplier must remove or retrofit this equipment or vehicle within 24 hours or be subject to liquidated damages pursuant to subdivision (c) of this section until that piece of equipment or vehicle is removed from Project.

c) In the event of a violation of any provision of this section, except as provided, in subdivision (d) of this section, liquidated damages shall be assessed against the Prime Contractor in the amount of $5,000 for each violation (with each piece of noncomplying equipment and each day of noncompliance being a separate violation, not to exceed a total of $50,000 for any one piece of equipment). Said liquidated damages are not imposed as a penalty but as an estimate of the damages that the County will sustain from delay in completion of the work, as well as resultant damages to public health of its citizens, which damages by their nature are not capable of precise proof. The County may withhold and deduct from monies otherwise due the Prime Contractor the amount of liquidated damages due the County.

d) No Prime Contractor or Subcontractor shall make a false statement or claim with respect to any matter material to compliance with the provisions of this section to the County. Any Prime Contractor or Subcontractor making such a false statement shall pay the County up to $10,000 for each such statement as liquidated damages pursuant to the provisions of subdivision (c) of this section.

e) Fees and liquidated damages paid to the County under this section shall be placed in the Cook County Environmental Management Fund.

Sec. 30-956. Regulations.

Within six months of the effective date of this act, the Department shall, after written notice and public hearing, promulgate regulations implementing the provisions of this act.

Effective date: This Ordinance shall take effect upon adoption.

Approved and adopted this 19th day of May 2009.

TODD H. STROGER, President

Cook County Board of Commissioners

Attest: DAVID ORR, County Clerk.

SPECIAL PROVISION
FOR
PROCESSING OF EXTRA WORK PAYMENT REQUESTS

Contractor's payment requests for Extra Work as identified in Article 104.02 of the Standard Specifications and the Special Provision for Contract Extra Work shall be processed in accordance with Article 109.04 of the Standard Specifications and the following additional procedures:

1) Contractor shall invoice the County for such Extra Work in accordance with the lump sum price, unit price, or force account as agreed to by the Engineer and Contractor.

2) Force account billing for equipment expense shall follow the applicable volume of the Equipment Watch Rental Rate Blue Book (Blue Book). Determination of equipment rates shall follow the IDOT Construction Memorandum 08-09. Also, a copy of the Blue Book calculation for each piece of equipment shall be included with the force account billing.

3) Contractor shall submit invoice for such Extra Work after the Extra Work has been fully completed by Contractor within sixty (60) days of completion of the work.

4) Within sixty (60) days after receipt of the invoice, the Engineer will review the Contractor's invoice and determine whether the invoice complies with the above. If the Engineer disapproves the invoice, the Engineer shall give Contractor notice of the reasons for such disapproval and the Contractor shall resubmit a corrected invoice for the Engineer's review. The County shall have an additional thirty (30) days to review and determine whether that the corrected invoice complies with the above.

5) Once the Engineer determines that the invoice complies with the above, the Engineer shall present a recommendation for change in plan for the specific items of extra work. The Superintendent shall execute a change order for the specific items of extra work and submit such change order to the Cook County Chief Procurement Officer, or where appropriate, to the County Board for approval.

6) Within thirty (30) days of the Board's or the Cook County Chief Procurement Officer's approval of the change order, payment shall be reflected under the specific items of extra work completed by the Contractor and the corresponding amount shall be deleted from the Contract Extra Work item.

SPECIAL PROVISION
FOR
ENGINEER'S FIELD OFFICE

This Special Provision amends the provisions of the Standard Specifications for Road and Bridge Construction and shall be construed to be a part thereof.

670.02 Engineer's Field Office Type A. Amend the following of Article 670.02, paragraph 6:

(i) A minimum of two communication paths. The configuration shall include:

(1) Internet Connection. A commercial grade internet service connection using telephone DSL, cable broadband or CDMA wireless technology with a MINIMUM bandwidth of 768 kbs. Additionally, an 802.11 g/N wireless router shall be provided, which will allow connection by the Engineer and up to four Department Staff. All costs related with equipment, installation, maintenance and service shall be included.

The Cook County Department of Transportation and Highways Engineering Computer Division contact person is as follows:

Mo Al-Khouja
Cook County Administration Building
Room 2400
69 West Washington Street
Chicago, Illinois 60602-3007
Work: (312) 603-1753
E-mail: M.Al-Khouja@cookcountyil.gov

(2) Telephone Lines. Three separate telephone lines with voicemail shall be provided.

(j) One digital copy machine with an automatic feed tray storing at least 30 sheets of paper, capable of reproducing prints as black lines on white paper up to 11 x 17 in. (280 x 432 mm) in size. Reproduction paper (8.5 x 11 in., 8.5 x 14 in., and 11 x 17 in.) shall be supplied to the satisfaction of the Engineer. Maintenance, activating agent and power source for the copy machine shall be included.

The digital copy machine shall also be capable of scanning to / printing from a computer and faxing over a telephone line. All cables, support equipment, software, installation and technical support required to make and keep the equipment operational for up to four computers shall be included.

The digital copy machine, software and support equipment must be compatible with the most current version of Windows operating system.

(k) One electric hot and cold water dispenser. 5 gallon and 0.5 liter bottles of water shall be supplied to the satisfaction of the Resident Engineer.

(l) One electric paper shredder capable of shredding a minimum 15 sheets at a time.

670.02 Engineer's Field Office Type A. Add the following to Article 670.02, paragraph 6:

(m) Three (3) new cellular phones with the capacity for both cellular call and two (2) way communication (Nextel or equal), established voice mail, hands free adaptors, belt clips and car adaptors. These cellular phones will be for exclusive use by the Engineer and the Engineer's support staff. All of the cellular phones and services must be compatible with each other. Maintenance and operating costs of the cellular phones shall be included.

(n) One digital camera with 8 megapixel minimum resolution, batteries to operate the camera, USB cable, minimum 8 GB memory card and digital camera case.

(o) A new upright bagless vacuum cleaner with a hepa-filter or new shop vacuum with a Hepa-Filter and any miscellaneous cleaning supplies necessary for the Engineer to maintain the Field Office.

A weekly cleaning service for the field office shall be provided.

(p) The following items are suggested office and field supplies. These items are subject to revision by the Resident Engineer, must be coordinated with the Resident Engineer prior to purchase, and shall be furnished to the satisfaction of the Resident Engineer prior to commencement and for the duration of the project.

If no pay item for Engineer's Field Office is included in the contract or used by the Department, the following items shall be incidental to the contract.

These items will not be returned at the conclusion of the contract.

OFFICE:

Adjustable Hole Punch, Black (3-Hole)	1 Each
Bankers Box, Legal size With String and Button Closure	4 Pack
Binder Clips, Large, 2", Box of 12 Each	2 Each
Binder Clips, Medium, 1 ¼", Box of 12 Each	2 Each
Binder Dividers, Avery index marker or equivalent	1 Each
Binder, Black 1" Capacity	1 Each
Binder, Black, 1-1/2" Capacity	2 Each
Binder, Black, 3" Capacity	1 Each
Calendar, At-A-Glance 3-Month Wall or equivalent	1 Each
Calendar, At-A-Glance Compact Desk Calendar Base and Calendar Refill	1 Each

3" x 3 ¾" or equivalent	
Clipboard, Legal	2 Each
Correction Fluid, Multipurpose, White	1 Each
DVD Cases, Slim Line, 25 Count	1 Pack
DVD Discs, R.W., 25 Count	1 Pack
Folders, Manila 250 Count Letter 1/3 Cut File	1 Box
Highlighters, Assorted Fluorescent Colors, 4 Count	1 Pack
Labels, Multipurpose White 500 Count, 3/4" x 1 ½"	1 Pack
Letter Trays, Stackable, Pack of 6	1 Each
Markers, Large, Permanent, Black	12 Each
Markers, Sharpie, Black or equivalent	12 Each
Memory Card, 2 Gig SD for Digital Camera	1 Each
OIC, Ideal Clamps, Small Box of 50	2 Each
Paper Clips, Jumbo No. 1, Regular, Box of 100	2 Each
Paper Clips, No. 1, Regular, Box of 100	2 Each
Paper, Quadrille Pad, 8 ½" x 11"	6 Each
Paper, Standard Canary Letter Pads, 6 Count, 8 ½" x 11 ¾"	1 Pack
Pen, Black	2 Pack
Pen, Red	1 Pack
Pencil, Lead Refill, 0.5 mm, Tube of 12	2 Each
Pencils, Disposable	2 Pack
Pencils, Color (Green)	1 Pack
Pencils, Color (Orange)	1 Pack
Pencils, Color (Red)	1 Pack
Pencils, Color (Yellow)	1 Pack
Pencils, Pentel Forte or equivalent, Automatic Pencil, 0.5 mm	3 Each

Pencils, Zebra Rubber Sharpo Mechanical Pencil or equivalent	2 Each
Post-It Memo Cubes, 3 7/8" x 3 7/8", Cube of 300 Sheets	1 Each
Post-It Notes, Yellow, 12 Count 3" x 3"	1 Pack
Rubber Bands, #16, 1 lb., 2 " x 1/16"	1 Each
Rubber Bands, #32, 1 lb., 3" x 1/8"	1 Each
Scissors, Deskwork's or equivalent	1 Each
Staple Remover, Pinch Type	1 Each
Stapler, Black Deluxe Standard	1 Each
Tape Dispenser	1 Each
Tape, Transparent Refills ¾"	6 Each

FIELD:

Ruler, 6 ft., inch/tenth	6 Each
Tape, 100 ft., Fiberglass with Handle	1 Each
Tape, 25 ft. inch/tenth, Retractable, Lufkin or equivalent	2 Each
Wheel, Measuring English	1 Each

The estimated cost for office and field supplies shall be as follows:

Bid Amount		Approximate Cost
Up to	$1,000,000	$ 625
$1,000,000	$3,000,000	$ 750
$3,000,000	$5,000,000	$ 875
Over	$5,000,000	$1,000

SPECIAL PROVISION
FOR
CONSTRUCTION DEBRIS

Add the following to the third paragraph of Article 202.03 of the Standard Specifications:

"The Contractor shall not conduct any generation, transportation, or recycling of construction or demolition debris, clean or general or uncontaminated soil generated during construction, remodeling, repair, and demolition of utilities, structures, and roads that is not commingled with any waste, without the maintenance of documentation identifying the hauler, generator, place of origin of the debris or soil, the weight or volume of the debris or soil, and the location, owner, and operator of the facility where the debris or soil was transferred, disposed, recycled or treated. This documentation must be maintained by the Contractor for 3 years."

SPECIAL PROVISION
FOR
CLEAN CONSTRUCTION AND DEMOLITION DEBRIS

In accordance with the State of Illinois Environmental Protection Act, the Cook County Department of Transportation and Highways (the Department), as "Site Owner" at the subject highway improvement location, is required to certify that all materials to be taken to an uncontaminated soil fill location, including uncontaminated soil and clean construction and demolition debris, are to be certified as uncontaminated soil.

The Department has performed sufficient testing at the site and has determined that soils to be excavated per the plans as well as existing concrete and asphalt pavement materials meet the criteria to be considered clean construction and demolition debris. Exceptions are listed below*. In accordance with the Act, the certification is made per IEPA Form LPC-663. A copy of the completed Form LPC-663 has been attached to this special provision. The original form is available from;

Ms. Holly Cichy
Chief Engineer of Construction
Cook County Department of Transportation and Highways
69 W. Washington St., 23rd Floor
Chicago, IL 60602
(312) 603-1613

The Contractor is expected to be thoroughly familiar with the provisions of the Environmental Protection Act as it relates to proper disposal of excavated material and construction debris. Should the Contractor choose to dispose of surplus soil material at a registered uncontaminated soil fill location, this form must be submitted to the operator of that location before any materials can be disposed of at that site. The Contractor should be advised that, even with the submittal of the properly executed Form LPC-663, the fill operators retain the right to reject any or all loads from a particular construction site based on their own determination of the suitability of material from that site. Each certification covers only material from that specified job site. The Contractor shall take care not to stockpile or mix together material from different sites before taking that material for disposal.

This special provision is not to be construed as a requirement that obligates the Contractor to dispose of surplus material at a registered uncontaminated soil fill location.

* Based on the Department's investigation and location history including the possible determination of a LUST site or other risk indicators, it has been determined that materials excavated at the following locations may not meet the Clean Construction and Demolition Debris requirements:

*** STA. 112+00 to STA. 126+14 (on the west side of Kedzie Ave.) and STA. 112+00 to STA. 123+94 (on the east side of Kedzie Ave.)**

This Special Provision will modify Article 669 of the Standard Specifications as follows:

The Contractor is advised to consider the cost of disposing of all clean construction and demolition debris as delineated herein and reflect those costs in their bids for **EARTH EXCAVATION** or other appropriate items which may include soils removal. Pay items for **NON-SPECIAL WASTE DISPOSAL, SPECIAL WASTE DISPOSAL, HAZAROUS WASTE DISPOSAL** and **SPECIAL WASTE PLANS AND REPORTS** have been included in the Summary of Quantities in order to provide for the disposal of materials in those

locations listed above. The requirements for removal and disposal of such materials shall be in accordance with Article 669.

SPECIAL PROVISION
FOR
MANAGING CONCRETE WASTE

Description. Prevent or reduce the discharge of pollutants to stormwater from concrete waste including diamond grinding slurry or residue by conducting washout offsite or by performing onsite washout in a designated area.

Construction. Perform this work on projects where;

- Concrete is used as a construction material or where concrete dust and debris result form demolition activities
- Slurries containing portland cement concrete (PCC) or asphalt concrete (AC) are generated, such as from saw cutting, coring, grinding, grooving, and hydro-concrete demolition
- Concrete trucks and other concrete-coated equipment are washed onsite
- Mortar-mixing stations exist

Requirements.

- No discharge of water/lime slurry will be allowed to enter "waters of the state".

"Waters of the state" - all rivers, streams, lakes and other bodies of surface and subsurface water lying within the boundaries of the state which are not entirely confined and located completely upon lands owned, leased or otherwise controlled by a single person or entity.

- The slurry shall not be discharged to drainage ways, non-vegetated areas or anywhere storm water runoff is likely to occur.

- Discharge of the slurry should be stopped

  at least 25 feet from creeks and rivers on slopes less than 12 percent.
  at least 50 feet on slopes 12 percent to 25 percent in areas with healthy vegetation on the road right of way.
  at least 12 feet from the bottom of all ditches.

- On sites where there is sparse or no vegetation to control the movement of the slurry, alternatives that may be used include:

  Pump the slurry into tankers and hauled to an area where it can be spread as a lime supplement. This method will require additional tankers and land close to the project site.
  Incorporate the slurry into the soil on the right of way next to the road where it will not impact waters of the state, highway or shoulders.

- The Resident Engineer must approve any other method of application or use of the slurry. The design engineer should be contacted for guidance on the use of alternative methods.

- Precautions must be taken at all times to prevent the slurry from entering the waters of the state. Should improper application occur which may result in a discharge of lime slurry to the waters of the state, the contractor shall immediately remove the slurry and notify the Resident Engineer.

Implementation. The following steps shall be taken to help reduce stormwater pollution from concrete wastes:

- Store dry and wet materials under cover, away from drainage areas.
- Avoid mixing excess amounts of fresh concrete.
- Perform washout of concrete trucks offsite or in designated areas only.
- Do not wash out concrete trucks into storm drains, open ditches, streets, or streams.
- Do not allow excess concrete to be dumped onsite, except in designated areas.

For onsite washout:

- Locate washout area at least 50 feet from storm drains, open ditches, or water bodies.
- Prevent runoff from this area by constructing a temporary pit or bermed area large enough for liquid and solid waste.
- Wash out wastes into the temporary pit where the concrete can set, be broken up, and then disposed properly.
- Avoid creating runoff by draining water to a bermed or level area when washing concrete to remove fine particles and expose the aggregate.
- Do not wash sweepings from exposed aggregate concrete into the street or storm drain.
- Collect and return sweepings to aggregate base stockpile or dispose in the trash.

For Concrete Slurry Wastes. The following steps shall be taken when handling and disposing of concrete slurry wastes containing portland cement concrete (PCC) or asphalt concrete (AC) generated, such as from saw cutting, coring, grinding, grooving, and hydro-concrete demolition.

- PCC and AC waste should not be allowed to enter storm drains or watercourses.
- PCC and AC waste should be collected and disposed of or placed in a temporary concrete washout facility.
- A sign should be installed adjacent to each temporary concrete washout facility to inform concrete equipment operators to utilize the proper facilities.
- Below grade concrete washout facilities are typical. Above grade facilities are used if excavation is not practical.
- A foreman or construction supervisor should monitor onsite concrete working tasks, such as saw cutting, coring, grinding and grooving to ensure proper methods are implemented.
- Saw-cut PCC slurry should not be allowed to enter storm drains or watercourses.
- Residue from grinding operations should be picked up by means of a vacuum attachment to the grinding machine.
- Saw cutting residue should not be allowed to flow across the pavement and should not be left on the surface of the pavement.

Slurry residue should be vacuumed and disposed in a temporary pit (as described below) and allowed to dry. Dispose of dry slurry residue in accordance with

For Onsite Temporary Concrete Washout Facility:

- Temporary concrete washout facilities should be located a minimum of 50 ft from storm drain inlets, open drainage facilities, and watercourses. Each facility should be located away from construction traffic or access areas to prevent disturbance or tracking.
- A sign should be installed adjacent to each washout facility to inform concrete equipment operators to utilize the proper facilities.
- Temporary concrete washout facilities should be constructed above grade or below grade at the option of the contractor. Temporary concrete washout facilities should be constructed and maintained in sufficient quantity and size to contain all liquid and concrete waste generated by washout operations.
- Temporary washout facilities should have a temporary pit or bermed areas of sufficient volume to completely contain all liquid and waste concrete materials generated during washout procedures.
- Washout of concrete trucks should be performed in designated areas only.
- Only concrete from mixer truck chutes should be washed into concrete wash out.
- Concrete washout from concrete pumper bins can be washed into concrete pumper trucks and discharged into designated washout area or properly disposed of offsite.
- Once concrete wastes are washed into the designated area and allowed to harden, the concrete should be broken up, removed, and disposed of per WM-5, Solid Waste Management. Dispose of hardened concrete on a regular basis.
- Temporary Concrete Washout Facility (Type Above Grade)

    - Temporary concrete washout facility (type above grade) should be constructed as shown on the details at the end of this BMP, with a recommended minimum length and minimum width of 10 ft, but with sufficient quantity and volume to contain all liquid and concrete waste generated by washout operations.
    - Silt Fence, wood stakes, and sandbag materials should conform to the provisions in SE-9, Straw Bale Barrier.
    - Plastic lining material should be a minimum of 10 mil in polyethylene sheeting and should be free of holes, tears, or other defects that compromise the impermeability of the material.
- Temporary Concrete Washout Facility (Type Below Grade)

    - Temporary concrete washout facilities (type below grade) should be constructed as shown on the details at the end of this BMP, with a recommended minimum length and minimum width of 10 ft. The quantity and volume should be sufficient to contain all liquid and concrete waste generated by washout operations.
    - Lath and flagging should be commercial type.
    - Plastic lining material should be a minimum of 10 mil polyethylene sheeting and should be free of holes, tears, or other defects that compromise the impermeability of the material.

Removal of Temporary Concrete Washout Facilities: When temporary concrete washout facilities are no longer required for the work, the hardened concrete should be removed and disposed of. Materials used to construct temporary concrete washout facilities should be removed from the site of the work and disposed of. Holes, depressions or other ground disturbance caused by the removal of the temporary concrete washout facilities should be backfilled and repaired.

Inspection and Maintenance.

- Inspect and verify that activity–based BMPs are in place prior to the commencement of associated activities. While activities associated with the BMP are under way, inspect weekly during the rainy season and of two-week intervals in the non-rainy season to verify continued BMP implementation.
- Temporary concrete washout facilities should be maintained to provide adequate holding capacity with a minimum freeboard of 4 in. for above grade facilities and 12 in. for below grade facilities.
- Maintaining temporary concrete washout facilities should include removing and disposing of hardened concrete and returning the facilities to a functional condition.
- Hardened concrete materials should be removed and disposed of.
- Washout facilities must be cleaned, or new facilities must be constructed and ready for use once the washout is 75% full.

Disposal for the Diamond Grinding Slurry (Non Hazardous Only).

Transporting. - Transport the diamond grinding slurry from the diamond grinder to a licensed Type II municipal landfill for solidification or to a licensed liquid industrial waste disposal facility. Cover and contain to prevent loss to the environment during transport and delivery to the licensed facility.

Solid Waste Facility. Dispose of the diamond grinding slurry in a licensed Type II municipal landfill pursuant to Part 115 of Solid Waste Management, of the Natural Resources and Environmental Protection Act, 1994 PA 451, as amended (Act 451). The disposal shall be consistent with the landfill's waste acceptance policies and the slurry shall be solidified sufficiently to pass the paint filter test.

Licensed Liquid Industrial Waste Disposal Facility. The diamond grinding slurry may also be processed as a liquid industrial waste at a licensed liquid industrial waste facility pursuant to Part 121 of the Liquid Industrial Waste, of the Natural Resources and Environmental Protection Act, 1994 PA 451, as amended (Act 451), provided the disposal is consistent with the licensed liquid waste facility processor acceptance policies.

Records Furnish a complete waste disposal manifest for each load prepared by the Contractor with copies to the Engineer containing information on the point of generation including roadway, the volume transported, and the name of licensed disposal facility.

Contractor Responsibility for Method of Operations. This specification sets forth minimum steps to avoid violating environmental laws. It remains the responsibility of the Contractor to determine whether more than those minimum steps are required and to perform the work required by this contract in whatever manner may be required to comply with applicable laws. The Contractor shall be liable to the Department for any fines, costs, or remediation costs incurred by the Department as a result of the Contractor's failure to be in compliance with this specification and all federal, state and local laws.

Measurement and Payment: All costs associated with the collecting, handling, transporting by contractor or licensed industrial waste hauler, manifesting the waste, managing the diamond grinding slurry, and disposing will not be paid for separately but will be included in the payment for other items of work. All costs associated with full compliance with applicable laws regardless of whether or not all applicable laws are cited in this special provision or in the Standard Specification for Construction will be borne by the Contractor.

SPECIAL PROVISION
FOR
DOWEL BARS

Revise the fifth and sixth sentences of Article 1006.11(b) of the Standard Specifications to read:

"The bars shall be epoxy coated according to AASHTO M 284, except the thickness of the epoxy shall be 7 to 12 mils (0.18 to 0.30 mm) and patching of the ends will not be required. The epoxy coating applicator shall be certified according to the current IDOT Bureau of Materials and Physical Research Policy Memorandum, "Epoxy Coating Plant Certification Procedure". The Department will maintain an approved list."

Basis of Payment. Dowel Bars required for Pavement Patching or placement of P.C. Concrete Pavement will NOT be paid for separately. The cost of the dowel bars will be included in the cost for the respective pavement replacement item. Contraction joints requiring the use of dowel bars will be located at the direction of the Engineer and placed in accordance with the applicable Illinois Department of Transportation Standard or Specification as well as any other note, detail or standard contained in the project plans and specifications.

SPECIAL PROVISION
FOR
CRUSHED STONE (TEMPORARY USE)

Description. This work shall consist of furnishing and placing crushed stone for temporary use to provide and maintain ingress and egress to abutting properties during construction operations. It shall be used for access to intersecting roadways, alley returns, crosswalks and other places required by the Engineer. The crushed stone or gravel shall have a gradation of CA6 or CA10 conforming to Article 1004.01 of the State Standard Specifications. Excess materials recovered from the job site such as bituminous grindings and sub-base granular materials from existing pavements may be utilized at the discretion of the Engineer.

Basis of Payment. This work will be paid for at the Lump Sum for Crushed Stone (Temporary Use). An estimated quantity may be given in the plans for informational use only. The Lump Sum payment shall include furnishing, transporting, placing, maintaining, reusing and the ultimate disposal of the Crushed Stone (Temporary Use) as herein specified or as directed by the Engineer.

SPECIAL PROVISION
FOR
SCHEDULING AND LANDSCAPING

Scheduling

The work involved in the completion of this project shall be complete on or before October 31, 2014. Failure to meet this deadline will result in Liquidated Damages as per Illinois Department of Transportation Specification 108.09.

It is called to the contractor's attention that the contract for section 12-W4612-06-BR, Kedzie Avenue over NIRC Railroad, may be in force adjacent to this contract. The contractor's cooperation may be required to coordinate his operations to expedite construction in this area.

Landscaping

All landscaping items contained in this contract shall be undertaken and completed in accordance with the seasonal restrictions found in the plans, specifications and special provisions. This work, or portions thereof, shall be undertaken as directed by the Engineer, and a total of five (5) working days beyond the contract completion date is allowed in order to complete the improvement.

SPECIAL PROVISION
FOR
BLOCKING EXISTING DRAINS AND SEWERS

Description. This item shall consist of the blocking of abandoned sewer lines at existing manholes and/or catch basins, where called for on the plans.

Construction Methods. Where called for on the plans, sewers shall be blocked at the manhole or catch basin with a concrete plug of Class SI Concrete, tamped to form a dense, waterproof block, troweled smooth to conform to the inside contour of the manhole or catch basin. For sewers 18 inches in diameter or less, the concrete block shall be 12 inches thick and for sewers over 18 inches in diameter the concrete block shall be 24 inches thick.

Basis of Payment. This work will be paid for at the contract unit prices each for Blocking Existing Drains and Sewers (18 in. or less) and Blocking Existing Drains and Sewers (Over 18 in.) which price shall include all labor and materials to complete the work in accordance with the plans and these special provisions.

SPECIAL PROVISION
FOR
COOPERATION WITH UTILITIES

This special provision amends the provisions of Article 105.07 of the Standard Specifications and includes a section clarifying the utility information provided in the plans and specifications.

105.07 - Cooperation with Utilities. Revise the last paragraph regarding (a) known Utilities to read:

> "No additional compensation will be allowed for any delays, inconveniences, or damage sustained by the Contractor due to any interference from the said utility appurtenances or the operation of moving them either by the utility company or by him; or on account of any special construction methods required in prosecuting his work due to the existence of said appurtenances either in their present or relocated positions."

105.07 - Cooperation with Utilities. Delete subarticle 105.07 (b) Unknown Utilities and substitute the following:

(b) Unknown Utilities. The requirements stated above for known utilities shall apply to unknown utilities.

Examination of Plans, Specifications, Special Provisions and Site of Work.

The bidder shall, before submitting a bid, carefully examine the provisions of the contract. The bidder shall inspect in detail the site of the proposed work, investigate and become familiar with all the local conditions affecting the contract and fully acquaint themselves with the detailed requirements of construction. Submission of a bid shall be a conclusive assurance and warranty the bidder has made these examinations and the bidder understands all the requirements for the performance of the work. If his/her bid is accepted, the bidder shall be responsible for all errors in the proposal resulting from his/her failure or neglect to comply with these instructions. The Department will, in no case, be responsible for any costs, expenses, losses, or change in anticipated profits resulting from such failure or neglect of the bidder to make these examinations.

The bidder shall take no advantage of any error or omission in the proposal and advertised contract. Any prospective bidder who desires an explanation or interpretation of the plans, specification, or any of the contract documents shall request such in writing from the Department, in sufficient time to allow a written reply by the Department that can reach all prospective bidders before the submission of their bids. All information and changes made to the contract will be communicated through an addendum. Only changes made through the addendum will be binding to the Department. When the plans or special provisions include information pertaining to the location of underground utility facilities, such information represents only the opinion of the Department as to the location of such utilities and is only included for the convenience of the bidder. The Department assumes no responsibility whatever in respect to the sufficiency or the accuracy of the information shown on the plans relative to the location of underground utility facilities. It shall be the Contractor's responsibility to determine the actual location of all such facilities including field verification of both vertical and horizontal locations relative to the work. He shall also obtain from the respective utility companies detailed information relative to the location of their facilities and the working schedules of the utility companies for removing or adjusting them.

It is understood and agreed that the Contractor has considered in his bid all of the permanent and temporary utility appurtenances in their present or relocated positions. The Contractor's attention is directed to the fact that the various utility companies may be relocating and constructing facilities within the project limits concurrent with the Contractor's operations. The Contractor shall coordinate his activities with the various utility companies, at all times, and may be required to work at other locations of the improvement until relocation and construction is completed by the utility company. The Contractor is advised that the relocation times and schedules listed in the special provision "Status of Utilities to be Adjusted" are only rough estimates and no extra compensation will be allowed for delays resulting from any work performed by a utility company or for their failure to meet said relocation schedule.

P:\Special Provisions - 2012\F_Drainage 156-210\185 Cooperation with Utilities.docx

STATUS OF UTILITIES
UTILITIES TO BE ADJUSTED
KEDZIE AVENUE
139TH STREET TO 135TH STREET
139TH STREET
KEDZIE AVENUE TO UTICA AVENUE
SECTION: 13-W4612-07-LS

The following agencies have facilities within the project limits:

Commonwealth Edison Company
25000 S. Governors Highway
University Park, IL 60466
Attn: Gary Zack
(630) 437-3182
cc: James Torres
(312) 394-3260
Joseph McGowan
(630) 576-7115

Village of Robbins
3327 W. 137th Street
Robbins, IL 60472
Attn: Bernard Ward
Director of Public Works
(708) 385-8940

AT&T
1000 Commerce Drive, Floor 2
Oak Brook, IL 60523
Attn: Steven Larson
(630) 573-6484

Comcast
688 Industrial Avenue
Elmhurst, IL 60126
Attn: Robert L. Schulter
(630) 600-6348

Nicor Gas Company
1844 Ferry Road
Naperville, Illinois 60563
Attn: Constance Lane
(630) 388-3830

Valero/Premcor Refining Group
3600 West 131st Street
Alsip, IL 60803
Attn: Bill Cooper
(708) 293-5539

Praxair NAIG
4520 Kennedy Avenue
East Chicago, Indiana 46312
Attn: Mr. Matthew Tyrrell
Pipeline Superintendent
(219) 391-5827

OneOk LLC
Lemont Storage Field
12850 Smith Road
Lemont, IL 60439
Attn: Mr. Leigh H. Clark
(630) 257-5404x2528

West Shore Pipe Line Company
(Buckeye Partners, L.P.)
12920 South Bell Road
Lemont, Illinois 60439
Attn: Mr. Mike Norris
(219) 313-5321 (C)

Wide Open West
1674 Frontenac Road
Naperville, IL 60563
Attn: Bill Schenk
(630) 930-8566 (C)
cc: Brian Hurd
(630) 523-1264

Kedzie Avenue and 139th Street (Contd.)

Utilities have not been delineated on the plans as no major conflicts or relocations are anticipated. It shall be the Contractor's responsibility to contact J.U.L.I.E. and Utility companies to locate utilities and protect existing utilities. The applicable provisions of Articles 105.07, 107.20 and 107.31 of the Standard Specifications for Road and Bridge Construction and Cook County Special Provision 185 shall apply.

NOTE: The Contractor shall contact J.U.L.I.E. at 1-800-892-0123 at least 48 hours prior to construction for utility locations.

Contact pipeline companies prior to digging near the pipelines.

H:\Design\Drainage\Utilities_Section\Status of Utilities\Kedzie Avenue and 139th Street.doc

BUCKEYE PARTNERS, L.P. AND AFFILIATES
Five TEK Park, 9999 Hamilton Boulevard
Breinigsville, PA 18031

Right-of-Way Use Restrictions Specification
Revision 3.3

Table of Contents

SECTION		PAGE NO.
	Purpose and Scope	2
1.0	General Guidelines	2
2.0	Excavation and Construction Restrictions	3
3.0	Specific Guidelines	4
3.1	Cover, Grading, and Drainage	4
3.1.1	Cover and Grading	4
3.1.2	Drainage	5
3.2	Aboveground and Underground Structures	5
3.2.1	General Requirements	5
3.2.2	Gardening and Landscaping	5
3.2.3	Fences and Walls	5
3.3	Roads, Driveways, Sidewalks, and Parking Areas	6
3.3.1	General Requirements	6
3.4	Foreign Utility Crossings	6
3.4.1	General Requirements	6
3.4.2	Metallic Utilities	6
3.4.3	Non-Metallic Utilities	7
3.5	Electrical, Fiber-Optic, and Communications Cables	7
3.5.1	General Requirements	7
3.5.2	Buried Cables	7
3.5.3	Aboveground Cables	7
3.6	Temporary Access Roads and Heavy/Construction Vehicle Crossings	8
3.7	Railroad Crossings	8
3.8	Farming and Field Tile	8
3.9	Construction-Induced Vibrations	8
3.10	Blasting Operations	9
3.11	Seismic Vibrating Operations	10
4.0	Deviations and Exceptions	11
5.0	Additional Information and Buckeye Contacts	11

ATTACHMENTS

1	Buckeye Facility Locations and Phone Numbers	12
2	Right of Way and Engineering Contacts	13
3	State One Call Systems	14
4	Requirements for Submission of Design Plans	15
5	Reinforced-Concrete Slab Detail	18
6	Earthen Ramp Detail	19
7	Blasting Plan Submission Form	20
8	Excavation Safety Checklist	21

Buckeye Partners, L.P. and Affiliates
Right-of-Way Use Restrictions Specification
Revision 3.3

Purpose and Scope

This Right-of-Way Use Restrictions Specification (hereinafter called "Specification") has been developed by Buckeye Partners, L.P. and Affiliates (hereinafter called "Buckeye") and is intended for landowners, utility owners, general contractors and their sub-contractors, pipeline/utility contractors, real estate developers, brokers and agents, lending officers and title underwriters, engineers, architects, surveyors, and local / governmental elected staffs (hereinafter called "Crossing Party") as a guideline for the design and construction of proposed land development.

Buckeye appreciates this opportunity to work with you in the planning stages of your development (or construction activity), and we look forward to working with you proactively. Buckeye's primary concern when activities are taking place near our pipeline is public safety and environmental protection. The intent of this Specification is to provide a clear and consistent set of requirements that will: (1) reduce the risk of damage to our pipeline and related facilities; (2) ensure unencumbered access to our right-of-way and pipeline facilities and the availability of adequate workspace for routine maintenance, future inspection, and/or repair work on our pipeline; and (3) enable the effective corrosion protection of our pipeline.

All such activities and projects that are performed near Buckeye's pipeline facilities are subject to formal review by Buckeye prior to issuance of final written approval. Depending on the scope of the project and its impact on Buckeye's pipeline facilities, additional engineering requirements and protective measures may apply. The following requirements are not only the policy of Buckeye, but comply with regulations set forth by the United States Department of Transportation, Safety Regulations, 49 CFR, Parts 192 and 195.

We want to be a good neighbor, but to do so requires us to act responsibly in protecting our right-of-way and preventing damage to the pipeline system. While we want to make every effort to accommodate your desired use of your property, our responsibility for public safety is paramount. Through proper planning and communications, we can ensure the safety and integrity of our pipeline system and the welfare of our neighbors.

> **The transmittal of this Specification does not constitute Buckeye's approval or permission for the Crossing Party to begin construction or work within or across the pipeline right-of-way. Work may not commence until written authorization approving such work has been issued by Buckeye.**

1.0 General Guidelines

1.1 The safety of the pipeline must be considered at all times. No attempt to probe for or engage in any construction activities which might damage the pipeline is permitted.

1.2 Before any preliminary field work or construction begins in the vicinity of Buckeye's pipeline, a determination of the exact location and elevation of the pipeline must be made. To coordinate this procedure, please contact our local Field Operations Manager at the Buckeye facility nearest to your proposed project (see Attachment 1 for a listing of Buckeye's facilities and telephone numbers).

1.3 All proposed drawings/plans must be submitted to Buckeye's Right of Way Department for review to determine to what extent, if any, the pipeline or right-of-way will be affected by the proposed construction and/or development. These drawings/plans must be prepared in strict compliance to Attachment 4, "Requirements for Submission of Design Plans".

1.4 When any construction activity is conducted in or around our pipeline right-of-way, Buckeye's On-Site Inspector must be present at all times. **NO WORK SHALL TAKE PLACE WITHOUT A BUCKEYE ON-SITE INSPECTOR PRESENT**. For this free-of-charge service, contact our local Field Operations Manager at the Buckeye facility nearest to your proposed project.

1.5 The Crossing Party shall contact Buckeye for re-marking of a pipeline if the existing markers are inadequate for any reason, including disturbance due to construction activities.

Note: Federal law prohibits the removal of pipeline markers.

1.6 The Crossing Party shall not burn trash, brush, or other items or substances within 50 feet of the pipeline.

1.7 The Crossing Party shall not store any equipment or materials on the right-of-way.

1.8 During routine or emergency maintenance on the pipeline, the cost to restore approved surface improvements (e.g., pavement, landscaping, sidewalks, etc.) shall be the responsibility of the Crossing Party.

2.0 Excavation and Construction Restrictions

2.1 Excavation operations shall be performed in accordance with appropriate State "One-Call" utility locating system requirements. As a matter of State law, anyone undertaking excavation work is required to call three (3) working days before excavating in MA, ME, MI, MO, NJ, PA, TN and WI; two (2) working days in all other states (see Attachment 3 for State One-Call numbers).

2.2 The Crossing Party will conduct "white-lining" of any proposed excavation areas. Buckeye will erect temporary pipeline markers/flags (yellow) identifying the location of the pipeline within the work area, and will provide information on how to respond should the pipeline be damaged or a commodity release occur. All personnel operating equipment over or around the pipeline must be made aware of its location and what to do if they make contact with the pipeline.

2.3 When a Crossing Party excavates near Buckeye's pipeline, a Buckeye representative must locate the pipeline and determine the depth of cover before the Crossing Party begins excavation. The Buckeye representative and the excavator must review and complete an Excavation Safety Checklist (Attachment 8). The Crossing Party shall not perform any excavation, crossing, backfilling, or construction operations until Buckeye's On-Site Inspector has reviewed the proposed work on site and given approval for work to proceed. Buckeye's On-Site Inspector shall have full authority to stop the work if it is determined that the work is being performed in an unsafe manner.

2.4 No equipment shall work directly over the pipeline. The Crossing Party shall install temporary fencing along Buckeye's right-of-way boundaries so that equipment will not inadvertently pass over the pipeline at locations other than those established for crossing (see Section 3.6).

2.5 When excavating within the right-of-way, the Crossing Party's backhoe shall have a plate welded over the teeth of the backhoe bucket, and the side cutters must be removed prior to

excavation. However, if within 24 inches of the outer edge of the pipe (this "tolerance zone" extends on all sides of the pipe), only hand excavation, air cutting, and vacuum excavation are permitted.

2.6 No excavations shall be made on land adjacent to the pipeline that will in any way impair, withdraw lateral support, cause subsidence, create the accumulation of water, or cause damage to the pipeline or right-of-way.

2.7 The Crossing Party shall ensure all excavation work complies with OSHA's excavation standards outlined in 29 CFR 1926 and correct any noncompliant excavation site before Buckeye's On-Site Inspector or the Crossing Party enters the site to perform work.

2.8 If conditions require, the Crossing Party shall be directed by Buckeye to install sand or cement bags or other suitable insulating materials to maintain proper vertical clearance from the pipeline.

2.9 At any location where the pipeline is exposed, the Crossing Party shall provide Buckeye the opportunity to inspect the pipeline condition, install cathodic protection test leads, and/or install underground warning mesh.

2.10 The maximum unsupported exposed length of pipe shall be 20 feet for 4-inch-diameter pipe, 25 feet for 6-inch- to 10-inch-diameter pipe, and 35 feet for 12-inch- to 24-inch-diameter pipe. When required, the pipeline shall be supported with grout and sand bags or padded skids. At no time shall the pipeline be used as a brace to support equipment or sheeting/shoring materials.

Note: The Crossing Party shall submit a support plan for Buckeye's review and approval.

2.11 No buried pipeline may be left exposed for any duration of time without concurrence of Buckeye's On-Site Inspector.

2.12 Backfill and compaction shall be performed to the satisfaction and in the presence of Buckeye's On-Site Inspector. At least 6 inches of fine, loose earth or sand with no sharp gravel, rock, hard clods, vegetation, or other debris shall be placed on all sides of any pipeline, and remaining backfill shall be placed so as not to disturb this padding material or damage the pipeline. Backfill over the pipe shall be compacted by hand until 18 inches of cover is achieved. The disturbed ground shall be compacted to the same degree of compaction of surrounding areas. The Crossing Party shall restore the site to its original condition except for items that are part of the Buckeye approved change.

3.0 Specific Guidelines

3.1 Cover, Grading, and Drainage

3.1.1 **Cover and Grading**:

a. The existing cover over the pipeline shall not be modified without Buckeye's written approval.
b. The final grading shall net a minimum cover of 36 inches over the pipeline.
c. In areas where buildings are proposed within 50 feet of the pipeline or due to other surface improvements and/or in areas determined by Buckeye, final grading shall net a minimum cover of 48 inches over the pipeline.
d. The maximum allowable cover/soil shall not exceed six (6) feet without Buckeye's written approval.

e. Use of vibratory equipment larger than walk-behind units is not permitted within 25 feet of the pipeline.

3.1.2 **Drainage**:

a. Detention ponds, lakes, structures or any type of impoundment of water, temporary or permanent, are prohibited within the right-of-way.
b. Culverts are not permitted within the right-of-way.
c. Any modifications to an existing drainage pattern shall be designed such that the erosion of the pipeline cover is controlled.
d. For streams, drainage channels, and ditches, a minimum of cover of 60 inches is required between the pipeline and the bottom of the drainage canal or ditch (see Section 3.3.1.f for road drainage ditches).

3.2 Aboveground and Underground Structures

3.2.1 **General Requirements**:

a. Buildings or other structures, including, but without limitation, overhanging balconies, patios, decks, swimming pools, wells, walls, septic systems, propane tanks, transformer pads, or the storage of materials which creates an obstruction or prevents the inspection of the right-of-way by air or foot, shall not be erected within the right-of-way.
b. The Crossing Party shall not develop or build retaining walls, drive piling or sheeting, or install an engineered structure that develops or controls overburden loads that will impact the pipeline (see Section 3.9).
c. Deep foundations which include piers, caissons, drilled shafts, bored piles, and cast-in-situ piles located within 500 feet of the pipeline shall be installed/drilled using an auger.
d. Occupied structures shall not be located within 50 feet of the pipeline unless a minimum cover of 48 inches is provided above the top of the pipeline.
e. Any deviation for aboveground and underground structures will be reviewed by Buckeye on a ***case-by-case basis***.

3.2.2 **Gardening and Landscaping**:

a. Trees or large shrubs and bushes are not permitted within the right-of-way. Trees planted outside of the right-of-way should be placed so branches and limbs will not overhang the pipeline right-of-way as the tree matures. Buckeye may trim/remove overhanging branches and limbs that encroach into the right-of-way.
b. Flowerbeds, vegetable gardens, lawns, and low shrubbery not exceeding 30 inches are permitted within the right-of-way. Buckeye is not responsible for replacing any plantings located within the right-of-way.

3.2.3 **Fences and Walls**:

a. Privacy fences or fences that prevent access to the right-of-way are not permitted.
b. All other fence installations within the right-of-way will be reviewed for approval by Buckeye on a ***case-by-case basis***. Upon Buckeye's written approval, fences shall be constructed with a 14-foot gate or removable sections across the right-of-way.
c. Fence posts shall not be installed within 5 feet of the pipeline and must be equidistant if crossing the pipeline.
d. No fence shall cross the right-of-way at less than a 60-degree angle.
e. Fences that run parallel to the pipeline shall be installed outside the right-of-way.
f. Masonry, brick, or stone walls are not permitted on the right-of-way.

3.3 Roads, Driveways, Sidewalks, and Parking Areas

3.3.1 **General Requirements**:

a. Roads, driveways, sidewalks, or parking areas shall not be constructed across the right-of-way without Buckeye's written approval. Upon Buckeye's approval, roads, driveways, and sidewalks shall cross perpendicular to the pipeline.
b. The maximum allowable cover shall not exceed six (6) feet without Buckeye's written approval.
c. Use of vibratory equipment larger than walk-behind units is not permitted within 25 feet of the pipeline.
d. Roads or driveways shall not be installed longitudinally within the right-of-way.
e. For roads and driveways, a minimum cover of 48 inches with a net cover of 36 inches of undisturbed soil is required above the pipeline.
f. A minimum cover of 36 inches over the pipeline is required at road drainage ditches. Upon Buckeye's approval, this cover can be reduced to 24 inches if ditch is rock/rip-rap lined and 12 inches if ditch is concrete lined.
g. For asphalt parking lots and sidewalks, a minimum cover of 36 inches with a net cover of 24 inches of undisturbed soil is required above the pipeline. Additional cover may be required by Buckeye based upon specific site conditions.

3.4 Foreign Utility Crossings

3.4.1 **General Requirements**:

a. Utilities shall cross perpendicular to the pipeline.
b. Utilities are required to cross beneath the pipeline with a minimum clearance of 24 inches. Exceptions to Buckeye's clearance requirements for underground service entrances to single family dwellings will be reviewed on a ***case-by-case basis***.
c. Sand or select fill shall be placed between the pipeline and utility (see Section 2.8).
d. Utilities installed parallel to the pipeline shall be reviewed by Buckeye on a ***case-by-case basis***. If approved, the utility shall be no closer than 15 feet from the pipeline.
e. Warning tape, in accordance with A.P.W.A. Uniform Color Code, shall be placed above utility, 12 inches below ground, for a distance of 25 feet on either side of crossing.
f. Signage shall be placed at crossing as determined appropriate by Buckeye.
g. Trenchless Excavations:
   [1] Utilities installed by a trenchless excavation method (directional drilling, jacking, slick boring, etc.) shall be reviewed by Buckeye on a ***case-by-case basis***.
   [2] Buckeye reserves the right to select the method of crossing for the proposed utility.
   [3] A minimum clearance of 60 inches (5 feet) below the pipeline is required.
   [4] For directional drilling operations, a surface wire tracking system is required to verify the exact location of the drill head.
   [5] A 4 feet by 4 feet excavation window, 24 inches below the pipeline is required for visual inspection of the pipeline to ensure the drill (or bore) does not impact the pipeline.
   [6] Blind boring is not permitted within Buckeye's right-of-way.

3.4.2 **Metallic Utilities**:

a. Bonds and test leads shall be installed at the expense of and by the Crossing Party where Buckeye deems necessary.
b. Utilities shall be coated with a non-conductive coating for a distance of 50 feet on either side of the pipeline crossing.

c. Ductile water pipe shall include nitrile gaskets within 50 feet of the pipeline crossing or anywhere within 25 feet of horizontal offset locations.

3.4.3 **Non-Metallic Utilities**:

a. Utilities shall be wrapped with tracer wire within the width of the right-of-way.
b. Natural gas (or other industrial gases) lines shall be encased in a 6-inch envelope of yellow 2,000 psi concrete across the right-of-way.
c. PVC water pipe shall include nitrile gaskets within 50 feet of the pipeline crossing or anywhere within 25 feet of horizontal offset locations.

3.5 Electrical, Fiber-Optic, and Communications Cables

3.5.1 **General Requirements**:

a. Cables shall cross perpendicular to the pipeline.
b. Cables installed parallel to the pipeline shall be reviewed by Buckeye on a ***case-by-case basis***. If approved, the cable shall be no closer than 15 feet from the pipeline.
c. Splice boxes, service risers, energized equipment, etc., are not permitted within the right-of-way.

3.5.2 **Buried Cables**:

a. Cables are required to cross beneath the pipeline with a minimum clearance of 24 inches. Exceptions to Buckeye's clearance requirements for underground service entrances to single family dwellings will be reviewed on a ***case-by-case basis***.
b. Sand or select fill shall be placed between the pipeline and cable (see Section 2.8).
c. All cables shall be installed in Schedule 80 PVC pipe and encased in a 6-inch envelope of red 2,000 psi concrete (orange for fiber) across the right-of-way.
d. Warning tape, in accordance with A.P.W.A. Uniform Color Code, shall be placed above the utility, 12 inches below ground, for a distance of 25 feet on either side of the crossing.
e. Signage for the crossing shall be placed as determined appropriate by Buckeye.
f. Trenchless Excavations:
   [1] Utilities installed by a trenchless excavation method (directional drilling, jacking, slick boring, etc.) shall be reviewed by Buckeye on a ***case-by-case basis***.
   [2] Buckeye reserves the right to select the method of crossing for the proposed utility.
   [3] A minimum clearance of 60 inches (5 feet) below the pipeline is required.
   [4] For directional drilling operations, a surface wire tracking system is required to verify the exact location of the drill head.
   [5] A 4 feet by 4 feet excavation window, 24 inches below the pipeline is required for visual inspection of the pipeline to ensure the drill (or bore) does not impact the pipeline.
   [6] Blind boring is not permitted within Buckeye's right-of-way.

3.5.3 **Aboveground Cables**:

a. A minimum of 20 feet of above-grade clearance for a distance of 25 feet on each side of the pipeline is required.
b. Mechanical supports and service drops including poles, towers, guy wires, ground rods, anchors, etc., are not permitted within 25 feet of the pipeline.

3.6 Temporary Access Roads and Heavy/Construction Vehicle Crossings

3.6.1 **General Requirements**:

a. Trucks carrying a maximum axle load up to 15,000 pounds may cross the right-of-way after Buckeye has confirmed a minimum cover of 48 inches over the pipeline.
b. For all other cases, earthen ramps (see Attachment 6), swamp mats, reinforced-concrete slabs (see Attachment 5), or steel plates may be required. Loading conditions and protection measures will be evaluated and dictated by Buckeye's Engineering Department.
c. During the use of an approved temporary construction road, Buckeye may require that the Crossing Party provide additional protective measures deemed necessary to prevent damage to the pipeline.
d. Buckeye will limit the number of temporary construction roads constructed by the Crossing Party.

3.7 Railroad Crossings

3.7.1 **General Requirements**:

a. A minimum clearance of 72 inches is required between railroad tracks and the pipeline.
b. A minimum cover of 36 inches is required between the bottom of drainage ditches on either side of a railroad and the pipeline.
c. For railroad main lines, the pipeline crossing must comply with local railroad guidelines that delineate the requirements for carrier pipe, casing pipe, and clearances. Buckeye shall be consulted for the review of any State submittals.
d. For private spur crossings, Buckeye will determine the railroad entity having jurisdictional authority to dictate crossing requirements.

3.8 Farming and Field Tile

3.8.1 **General Requirements**:

a. Field tile running parallel to the pipeline shall be spaced 10 feet from the centerline of the pipeline.
b. Field tile shall cross the pipeline perpendicularly with a clearance of 12 inches above or below the pipeline.
c. Buckeye will approve the total number of crossings of the pipeline on a ***case-by-case basis***.
d. Deep plowing or "ripping" operations shall be approved by and coordinated with Buckeye.

3.9 Construction-Induced Vibrations

3.9.1 **General Requirements**:

a. Construction activities that generate ground vibrations, including, but without limitation, pile driving, sheet driving, soil compaction work, jackhammering, or ramming, shall be reviewed by Buckeye on a ***case-by-case basis***.
b. If the Crossing Party anticipates such an activity within 300 feet of the pipeline, then continuous testing monitored by a seismograph located directly over the pipeline at its closest point to the activity must be conducted. The Crossing Party shall provide, at their expense, the monitoring service which must be approved by Buckeye.

c. The particle velocity of any one component of a three-component seismograph must not exceed 2.0 inches per second as recorded on the seismograph placed directly over the pipeline.

3.10 Blasting Operations

3.10.1 **Blasting within 500 feet of the pipeline right-of-way**:

a. The Crossing Party must submit a blast plan to Buckeye for review and approval. Verbal and written notice will be given 14 and 21 days respectively.

b. Blasting plans must include the following information:

- Dates blasting to occur
- Explosives type
- Maximum shot hole depth and diameter
- Number of holes and spacing
- Delay pattern
- Delay types and intervals
- Depth of overburden
- Depth of blast area
- Maximum charge per hole, per delay
- Show drilling/blasting pattern plan and profile in relation to Buckeye facilities
- Calculated radiant peak particle velocity (PPV) at varying distances from the pipeline and at the pipeline itself
- State permit (copy)
- Blasting contractor qualifications and insurance certificate (copy)
- Blasting Safety Plan (copy)

The Crossing Party shall complete Attachment 7, "Blasting Plan Submission Form", and include this form with their submission to Buckeye.

c. The Crossing Party shall make arrangements for a Buckeye On-site Inspector to be present to witness the blasting operation.

3.10.2 **Blasting within 300 feet of the pipeline right-of-way**:
(Adds to or replaces items in Section 3.10.1)

a. Blasting shall be monitored by a seismograph located directly over the pipeline at its closest point to the blast hole(s). The Crossing Party shall provide, at their expense, the monitoring service which must be approved by Buckeye.

b. The particle velocity of any one component of a three-component seismograph must not exceed 2.0 inches per second as recorded on the seismograph placed on the ground directly over the pipeline.

c. For blast testing, an initial test blast using a maximum charge of one pound shall be performed. The Crossing party shall detonate the first test blast with all necessary monitoring equipment in place to observe the results of the proposed blast design. Each subsequent test blast may be set and detonated only after the seismograph reading from the previous test blast indicates that further blasting can be safely conducted.

d. Routine production blasting may be initiated after completion of a successful test blast, with allowable charge based on the seismographic vibration recordings of test blasts. However, all blasting must be continuously monitored by a seismograph. The velocity recorded must not exceed the 2.0 inches per second limit noted above.

3.10.3 **Blasting within 50 feet of the pipeline right-of-way:**
(Adds to or replaces items in Section 3.10.2)

a. The Crossing Party shall hire a consulting firm that specializes in underground blasting to conduct the seismograph survey and certify the results.
b. Buckeye will approve the Crossing Party's selection of consulting firms that will conduct the seismographic surveys before starting any blasting operation.

3.10.4 **Special Requirements:**

a. For multiple-delay blasting, the Crossing Party shall begin the blasting sequence at the charge closest to the pipeline and progress away from the pipeline.
b. If seismographic readings above the limit stated in item 3.10.2.d of this section are recorded, the pipeline must be exposed and inspected for possible damage and/or product release. The Crossing Party conducting blasting operations is responsible for all expenses related to the exposure and any subsequent repairs necessitated by the operation.
c. At Buckeye's request, the Crossing Party shall install sheet piling, open trench channels, and/or matting to protect the pipeline during blasting operations.

3.11 Seismic Vibrating Operations

3.11.1 **Seismic vibrating within 500 feet of the pipeline right-of-way:**

a. The Crossing Party must submit a seismic vibrating plan to Buckeye for review and approval. Verbal and written notice will be given 14 and 21 days respectively.
b. Seismic vibrating plans, when using Vibroseis System Vibrators to radiate ground vibrations, must include information on soil conditions and depth of exploration, the anticipated number and type of vibrations, type and weight of vehicle, and peak force of equipment.
c. The peak force by vehicle weight shall not exceed 45,000 pounds.
d. The Crossing Party shall also make arrangements for a Buckeye On-Site Inspector to be present to witness the seismic vibrating operation.

3.11.2 **Seismic vibrating within 100 feet of the pipeline right-of-way:**

a. Vibration shall be monitored by a seismograph located directly over the pipeline at its closest point to the vibrator(s). The Crossing Party shall provide, at their expense, the monitoring service which must be approved by Buckeye.
b. The Crossing party shall determine and limit the maximum peak force allowed under continuous seismographic vibration monitoring such that the peak particle velocity will not exceed 2.0 inches per second.
c. Seismic vibration surveys shall not be conducted closer than 100 feet to the pipeline.

3.11.3 **Special Requirements:**

a. If seismographic readings above the limit stated in item 3.11.2.b of this section are recorded, the pipeline must be exposed and inspected for possible damage and/or product release. The Crossing Party conducting seismic vibrating operations is responsible for all expenses related to the exposure and any subsequent repairs necessitated by the operation.
b. At Buckeye's request, the Crossing Party shall install sheet piling and/or open trench channels to protect the pipeline during seismic vibrating operations.

Attachment 1: Buckeye Facility Locations and Phone Numbers

Alabama	Birmingham	(205) 369-0179
	Montgomery	(334) 309-4710
California	Lodi	(209) 368-9277
	San Diego	(714) 269-9028
Connecticut & Massachusetts	Wethersfield	(860) 529-7781
	New Haven	(203) 469-3479
Florida	Port Everglades	(954) 522-8464
Georgia	Birmingham (AL)	(205) 369-0179
Illinois	Argo	(708) 259-1352
	Lemont (West Shore)	(708) 227-0962
	Mazon	(815) 448-2491
	Hartford	(618) 255-1102
Indiana	Hammond	(219) 989-8601
	Hammond (West Shore)	(708) 227-0962
	Huntington	(260) 356-5802
Iowa	Cedar Rapids	(708) 259-1352
	Council Bluffs	(765) 516-3404
Louisiana	Liberty (TX)	(936) 336-5773
Maine	South Portland	(207) 767-2672
Michigan	Wayne	(734) 721-8834
Missouri	St. Louis	(618) 225-1102
	Milan	(708) 259-1352
	Liberty	(765) 516-3404
Nevada	Reno	(760) 802-1535
New Jersey	Linden	(908) 374-5301
New York	Auburn	(315) 253-5395
	New York City	(718) 656-5746
North Carolina	Goldsboro	(919) 778-2712
Ohio	Lima	(419) 993-8025
	Mantua	(330) 274-2234
	Toledo	(419) 698-8190
Pennsylvania	Boothwyn	(610) 459-3441
	Coraopolis	(412) 264-7432
	Duncansville	(814) 695-4852
	Mechanicsburg	(717) 766-7633
	Malvern	(610) 695-8000
	Macungie	(484) 232-4218
Tennessee	Memphis	(901) 395-0122
Texas	Liberty	(936) 336-5773
Wisconsin	Milwaukee (West Shore)	(708) 227-0962
	Madison (West Shore)	(815) 964-3727

Attachment 2: Right of Way & Engineering Contacts

Name	Responsibility	Phone / Address / Email
David Boone	**Manager, Right of Way, Permits & One Call**	(610) 904-4401 5 TEK Park, 9999 Hamilton Blvd. Breinigsville, PA 18031 DBoone@buckeye.com
Chris McPike	**Sr. Specialist, Right of Way** *Central District:* Eastern Ohio, Pennsylvania (Central & Western)	(412) 299-7019 469 Moon Clinton Road Coraopolis, PA 15108 CMcPike@buckeye.com
Marty White	**Sr. Specialist, Right of Way** *West/Central District:* Michigan, Ohio (except for Eastern Ohio), Indiana (except for Northwestern Indiana)	(419) 993-8008 940 Buckeye Road Lima, OH 45804 MWhite@buckeye.com
Michael Norris	**Sr. Specialist, Right of Way** *West District:* Northern Illinois, Northwestern Indiana, Wisconsin	(219) 397-3656 EX.2118 3823 Indianapolis Blvd. East Chicago, IN 46312 MRNorris@buckeye.com
Wesley Pekarek	**Specialist, Right of Way** *West District:* Iowa, Missouri, Central & Southern Illinois	(816) 836-6096 1315 N. Sterling Ave. Sugar Creek, MO 64054 WPekarek@buckeye.com
Ronald Bates	**Sr. Specialist, Right of Way** *East District:* Northeastern Pennsylvania, New York, New Jersey, Connecticut, Maine, Massachusetts	(484) 232-4482 5002 Buckeye Road Emmaus, PA 18049 RBates@buckeye.com
Daniel Mangum	**Sr. Specialist, Right of Way & Development** *Gulf Coast District:* Texas, Louisiana, Tennessee, Alabama, Georgia, California, Nevada, Florida, North Carolina	(832) 325-1626 One Greenway Plaza, Suite 600 Houston, Texas 77046 DMangum@buckeye.com
Beth Auman	**Sr. Specialist, Right of Way** *Encroachment Design Review:* East, Central, and West Districts *East District:* Southeastern Pennsylvania	(610) 904-4409 5 TEK Park, 9999 Hamilton Blvd. Breinigsville, PA 18031 BAuman@buckeye.com
Teriann Williams **Jeannette Fluke**	**Right of Way Coordinators** *Easements and Records:* Supporting East, Central, and West Districts	(610) 904-4418 (610) 904-4404 5 TEK Park, 9999 Hamilton Blvd. Breinigsville, PA 18031 TEWilliams@buckeye.com JFluke@buckeye.com

Attachment 3: State One Call Systems (National One Call System - Dial 811)

State	One Call Program	Phone No.	Website
Alabama	Alabama 811	(800) 292-8525	www.al811.com
California - North	USA North of Central / Northern California & Nevada	(800) 227-2600	www.usanorth.org
- South	Dig Alert & Underground Service Alert South	(800) 422-4133	www.digalert.org
Connecticut	Call Before You Dig	(800) 922-4455	www.cbyd.com
Florida	Sunshine State One Call	(800) 432-4770	www.callsunshine.com
Georgia	Georgia 811	(800) 282-7411	www.georgia811.com
Illinois - Non-Chicago	Julie, Inc.	(800) 892-0123	www.illinois1call.com
- Chicago	DIGGER - Chicago Utility Alert Network	(312) 744-7000	www.cityofchicago.org/transportation
Indiana	Indiana 811	(800) 382-5544	www.indiana811.org
Iowa	Iowa One Call	(800) 292-8989	www.iowaonecall.com
Louisiana	Louisiana One Call System, Inc.	(800) 272-3020	www.laonecall.com
Maine	Dig Safe System Inc.	(888) 344-7233	www.digsafe.com
Massachusetts	Dig Safe System Inc.	(888) 344-7233	www.digsafe.com
Michigan	MISS Dig System, Inc.	(800) 482-7171	www.missdig.net
Missouri	Missouri One Call System, Inc.	(800) 344-7483	www.mo1call.com
Nevada	USA North of Central / Northern California & Nevada	(800) 227-2600	www.usanorth.org
New Jersey	New Jersey One Call	(800) 272-1000	www.nj1-call.org
New York	Dig Safely New York	(800) 962-7962	www.digsafelynewyork.com
New York City & Long Island	New York 811, Inc.	(800) 272-4480	www.newyork-811.com
North Carolina	North Carolina 811	(800) 632-4949	www.nc811.org
Ohio	Ohio Utilities Protection Service	(800) 362-2764	www.oups.org
Pennsylvania	Pennsylvania One Call System, Inc.	(800) 242-1776	www.pa1call.org
Tennessee	Tennessee 811	(800) 351-1111	www.tnonecall.com OR www.tennessee811.com
Texas	Texas 811 OR Lone Star Notification Center	(800) 344-8377 (800) 669-8344	www.texas811.org www.lsnconecall.com
Wisconsin	Wisconsin Diggers Hotline	(800) 242-8511	www.diggershotline.com

811 Know what's below. Call before you dig.

Attachment 4:

Requirements for Submission of Design Plans
Buckeye Partners, L.P. and Affiliates

1. Contact Buckeye's local Field Operations Manager to arrange for a field determination by probe hole(s) of the vertical and horizontal locations of the pipeline(s). Arrange for your Surveyor to meet with Buckeye's Field Representative on-site in order to record this information for incorporation into your design plans. This locating service can be scheduled by contacting the Buckeye facility near your location (see Attachment 1).

   Note: At Buckeye's request, you will be required to provide excavation equipment (at your expense) in order to assist Buckeye's Field Representative in accurately locating the pipeline.

2. The location of each probe hole along with the corresponding depth of the pipeline(s) shall be recorded by your Surveyor. Buckeye's local Field Representative will consider site conditions and pipeline(s) location to determine the number of and distance between probe holes. As a minimum, the pipeline(s) shall be located at each proposed road or utility crossing, drainage channel or ditch, and other areas of proposed grade change within the pipeline right-of-way.

3. Using the probe hole data, accurately show Buckeye's pipeline(s) on your design plans. Include all reference and location information for each probe hole on your design plan, including the date and name of Buckeye's Field Representative who performed the field work.

4. The pipeline and probe hole data must be shown on individual drawings depicting the existing site conditions and the proposed site conditions. Highlight the pipeline(s) in yellow. In your plan transmittal letter, identify/list all of the drawing sheets that show the pipeline(s).

5. Buckeye's pipeline shall be indicated on all applicable plan sheets by pipe diameter and labeled, "High Pressure Petroleum Products Pipeline".

6. Add Buckeye to the Utilities List and include the Buckeye ROW Agent's name and phone number on the plans.

7. Indicate the following information on your design plans: [1] ground disturbances (blasting, seismic testing, pile driving, jackhammering, etc.) within 1,500 feet of the pipeline(s); [2] proposed location(s) where construction equipment will cross the pipeline right-of-way; [3] structure setback distances from the pipeline right-of-way; [4] proposed landscaping within 25 feet of either side of the pipeline(s); and [5] any permanent fencing that will limit/encumber Buckeye's access to the pipeline right-of-way.

8. If the drainage pattern of the existing site will be altered in any way that impacts the pipeline right-of-way because of your project, submit a drainage plan that specifically identifies new flow paths and all inlet/outfall/collection points.

9. Include/incorporate Buckeye's Right-of-Way Use Restrictions specifications (attached hereto) as a part of your final design plans. This can be done by adding a drawing sheet to your plans and appending (cut and paste) the Specification onto this sheet.

10. For property improvements that involve grade/pavement alterations, road work (new construction or improvements of existing), utility crossings (buried and overhead), or other subsurface or on-surface structure installations within Buckeye's right-of-way:

    a. Prepare a separate plan and profile drawing of Buckeye's pipeline(s) for the existing and the proposed conditions for your project.

    b. Include subgrade details that show materials and the thickness of each layer/course.

    c. Indicate the amount of existing cover that will be removed from the pipeline(s). Indicate the amount of cover that will be added over the pipeline(s). Indicate the proposed finished/final grade amount of cover over the pipeline(s).

    d. Show the clearances between Buckeye's pipeline(s) and any existing and new buried or overhead utilities that cross the pipeline right-of-way.

    e. Show the clearances between Buckeye's pipeline(s) and each proposed substructure at the two closest reference points.

    f. For any utility to be installed via boring, drilling, or tunneling, include a detailed procedure of this work with your design plans. Note: "Blind" boring is not permitted. Buckeye's pipeline(s) must be exposed during the bore operation to ensure that the bore head crosses safely underneath the pipeline(s).

    g. Indicate any areas of disturbance or other work that will require Buckeye's pipeline(s) to be exposed in order to perform your work.

11. Complete the following "Design Plans Submission Checklist", sign, date, and include with your design plans submittal. Mail **three full sized sets** of design plans to Beth Auman, Senior Specialist, Right-of-Way (see Attachment 2).

DESIGN PLANS SUBMISSION CHECKLIST

BUCKEYE PARTNERS, L.P.

Project Name: _____

Project Location: _____

*Latitude: _____ *Longitude: _____

Developer's Name: _____

Address: _____

Our project involves the following impacts to Buckeye's facilities:

- ☐ Cover, grading, and drainage pattern changes
- ☐ Aboveground and/or underground structures
- ☐ Road, driveway, sidewalks, and parking areas
- ☐ Utility crossings including gas, water (steam), sewer (storm & sanitary)
- ☐ Electrical, fiber-optic, and communications cables
- ☐ Temporary access roads for the crossing of heavy/construction equipment
- ☐ Railroad crossings
- ☐ Farming and field tile
- ☐ Construction-induced vibrations
- ☐ Blasting operations (attach BLASTING PLAN)
- ☐ Seismic vibrating operations (attach SEISMIC VIBRATING PLAN)
- ☐ Exposure of the pipeline (attach SUPPORT PLAN)
- ☐ Boring, drilling, or tunneling near the pipeline (attach DRILL PLAN)
- ☐ Other: _____

Buckeye pipeline location performed by:

_____ Name of Buckeye Employee

___/___/___ Date of Pipeline Locating Activity

Attach a copy of the field data provided by Buckeye's Representative

Signature: _____

PRINT NAME: _____

Title: _____

Email: _____

Date: _____

OFFICIAL USE ONLY

DATE REC'D: _____

REVIEW NO.: _____

SYSTEM NO.: _____

ATLAS PAGE: _____

R/W NO.: _____

__APPROVE __REJECT

OMMISSION OF ANY INFORMATION REQUESTED ABOVE WILL DELAY YOUR DESIGN PLAN REVIEW

Buckeye requires a minimum of 60 days for technical review upon receipt of complete and accurate design plans.

Attachment 5: Reinforced-Concrete Slab Detail

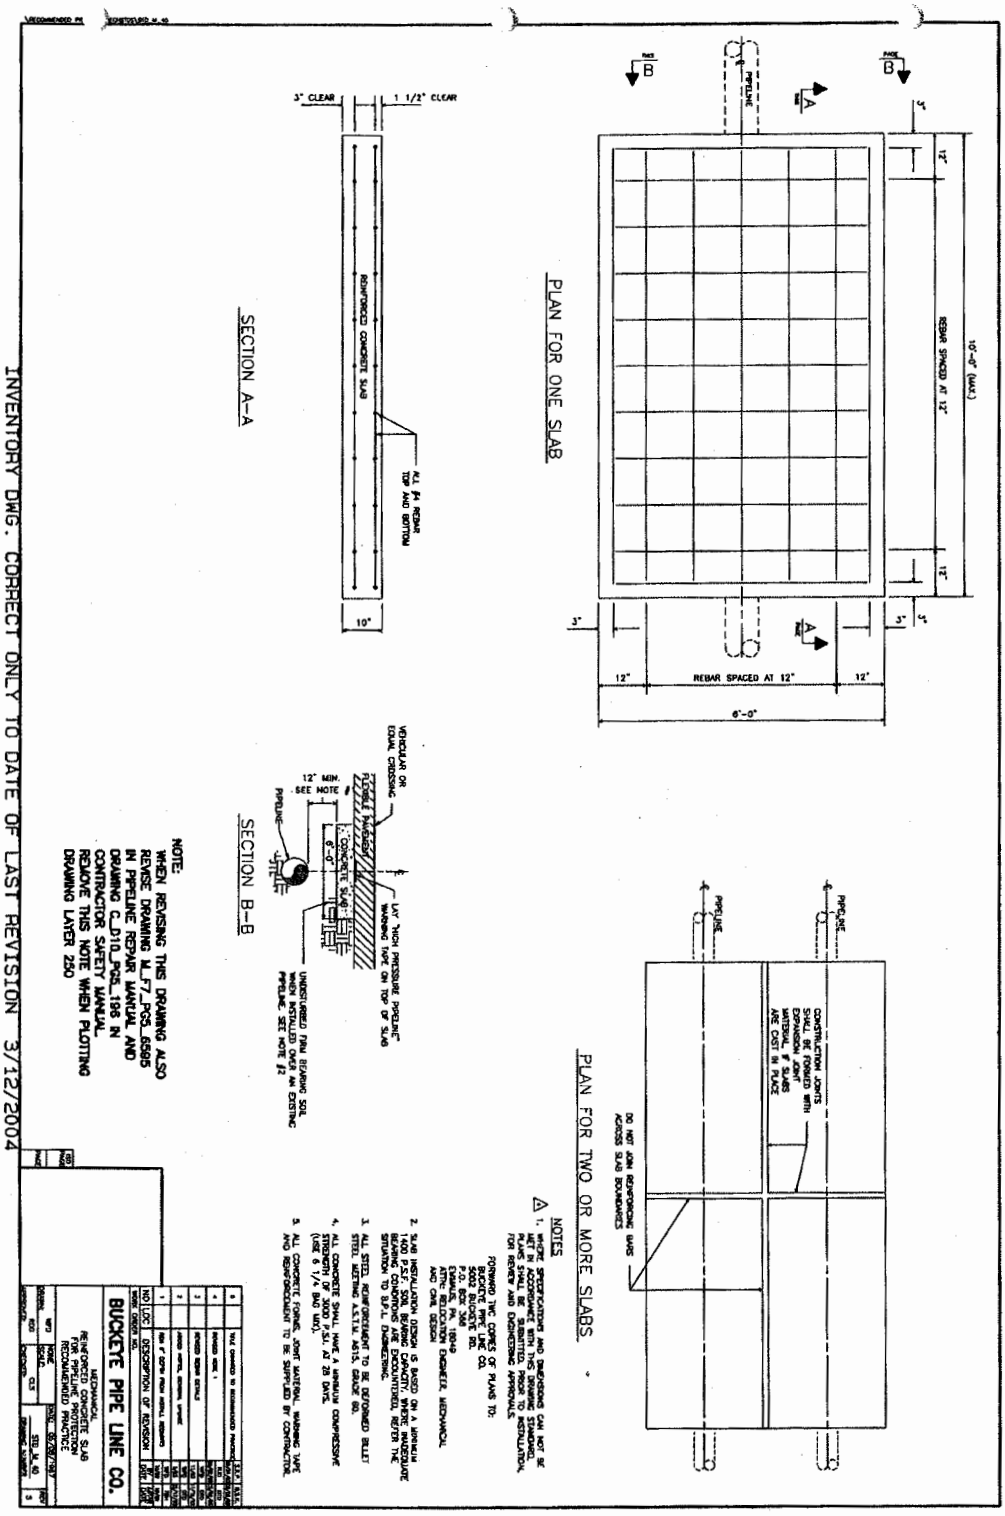

Project/Inquiry:		Loading:		Date:	
System:		Pipe Data:		Revision:	

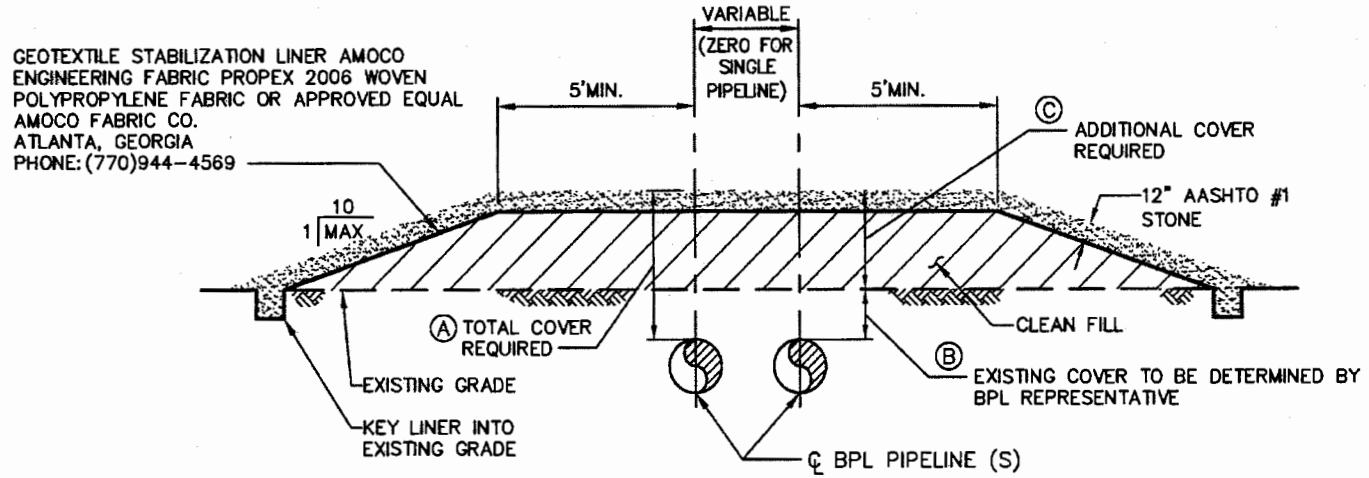

TEMPORARY (WET CONDITIONS) CONSTRUCTION RAMP OVER BPL PIPELINE (S)

NO SCALE

NOTES:

1. RAMP SHALL BE 15 FOOT PLUS/MINUS WIDE WITH SIDES TAPERED ON A MINIMUM 1:1 SLOPE.
2. IF DRY CONDITIONS PREVAIL AT CROSSING SITE LINER AND STONE CAN BE REPLACED WITH FILL MATERIAL.

* Indicates item supplied by Buckeye Pipe Line Company.

Legend & Notes:

A. Required pipeline cover must be a minimum of:	*	feet
B. Existing pipeline cover is currently:	TBD	feet
C. Earthen ramp height above existing grade:	*	feet

Buckeye Pipe Line Company
Earthen Ramp Detail

Attachment 7: Blasting Plan Submission Form

INFORMATION SECTION

Blasting Contractor -

Company Name: _____

Phone: _____

Email Address: _____

Contact Person: _____

Contracted by -

Company Name: _____

Address: _____

_____

Contact Person: _____

Project Name: _____

Address: _____

*Latitude: _____

*Longitude: _____

Location and Distance (in feet) to Nearest Buckeye Pipeline: _____

_____

Date of Blasting: _____

EXPLOSIVES SECTION

Type of Explosives: _____

Max. Charge / Hole (lbs): _____

Charge Delay (ms): _____

Charge Weight / Delay (lbs): _____

Max. Depth of Charge (ft): _____

Max. Diameter of Charge (in): _____

Depth of Blast Area (ft): _____

Depth of Overburden (ft): _____

Type of Rock to be Blasted: _____

Density of Rock (lbs/cu-ft): _____

Calculated Particle Velocity at a point -

300 feet from pipeline (in/sec): _____

200 feet from pipeline (in/sec): _____

100 feet from pipeline (in/sec): _____

Directly above pipeline (in/sec): _____

ATTACHMENT CHECKLIST

- ☐ Drilling/Blasting Pattern Sketch - include all depths, measurements, and delay patterns relative to Buckeye facility involved and each charge.
- ☐ State Approval Letter
- ☐ Blasting Contractor's Qualifications
- ☐ Blasting Contractor's Insurance Certificate
- ☐ Blasting Contractor's Safety Plan

OMMISSION OF ANY INFORMATION REQUESTED ABOVE WILL DELAY YOUR BLASTING PLAN REVIEW

Buckeye requires a minimum of 14 days for technical review upon receipt of complete and accurate blasting plans

Attachment 8: Excavation Safety Checklist

195 F-09, FORM A – EXCAVATION SAFETY CHECKLIST

The information noted on this form is intended to communicate general information about our pipeline(s) and is not intended to be solely relied upon by any party for the purpose of excavation or any similar purpose.

By law, to enable all participating utilities time to mark their facilities, the **One Call Center** in your state requires notification by calling 811 prior to any excavation. Buckeye Partners, L.P. is a member of this One Call enterprise and will automatically be notified through this system. In addition, a Buckeye inspector will perform and/or review with the excavator representative the applicable checklist items below.

Pipeline Locate Activity:

☐ If plans are available, requested a copy of the written project plans and drawings for review with the excavator and/or engineer. Had the excavator and/or engineer explain the extent of the work area, location and depth of the excavation, type of proposed utilities, location of proposed utilities, number of utility crossings, etc.

☐ Established the pipeline(s) location and marked the line(s) per state One Call requirements throughout the entire work area.

☐ Photographed all established pipeline markings throughout the work area.

Communication with the Excavator and/or Engineer:

☐ **The excavator and/or engineer was advised that a Buckeye inspector must:**

- **Monitor the excavation site daily when work is performed within 25 feet of a Buckeye pipeline.**
- **Observe continuously all excavation and backfill activity performed within 10 feet of a Buckeye pipeline or during the installation of any utility across a Buckeye pipeline facility.**
- **In addition, the excavator was instructed to call 800-331-4115 if they were ready to excavate within either above distance of a Buckeye pipeline and a Buckeye inspector was not present. When called a Buckeye inspector will be sent to perform the inspection, which is free of charge.**

☐ The excavator was advised that only backhoes or trackhoes with a steel plate welded across the teeth of the bucket are permitted to be used during excavation work around a Buckeye pipeline.

☐ The excavator was advised that the Buckeye inspector is required by law to perform an external inspection of any Buckeye pipeline exposed during excavation activity. The excavator understands that he/she is responsible to provide an OSHA compliant excavation, allowing the Buckeye inspector safe ingress and egress to examine our exposed pipeline.

☐ Walked through the work area with the excavator and communicated the locations of all Buckeye pipelines in the planned work area.

☐ Discussed the number of pipelines, pipe size(s), approximate pressures, approximate depths, excavation tolerance zones, hand digging requirements, and the hazards and characteristics of product(s) in the pipeline system(s) located in the planned work area.

☐ The excavator was advised to call the One Call Center 811 or contact Buckeye, if the Buckeye markings are destroyed or need to be refreshed in the planned work area. This service is provided free of charge.

☐ The excavator was advised that before any exposed Buckeye pipeline can be backfilled, the Buckeye inspector will direct the placement of an orange warning mesh over the pipeline.

☐ The excavator was advised that **any contact** with the pipeline, pipeline coating, test station wiring, or anode beds **must be reported to Buckeye prior to backfilling the excavation** to permit further inspection of the damage to assure continued safe pipeline operations.

☐ The excavator was advised that failure to comply with the conditions outlined above would result in Buckeye requiring the excavator to expose the pipeline again to allow an examination of the pipeline at the excavator's expense. If damage to the pipeline is discovered, Buckeye may seek monetary compensation for all repair costs. Buckeye may also report this activity to all concerned parties (State One Call Center, Regulatory Agencies, Principal Contractor, Excavator's Insurance Company, etc.).

If you are unable to reach the representative designated below, or **in case of an emergency,** request assistance as follows:
For excavation activities in CT, FL, IL, IA, IN, MA, ME, MI, MO, NJ, NY, OH, PA, and WI, please call 1-800-331-4115.
For excavation activities in LA, NV, TN, TX, AL, GA, NC, and Southern California, please call 1-866-514-8380.
For excavation activities in Northern California, please call 1-800-307-1107.

One Call Ticket:		**Line Segments:**		
Work Order:		**Mile Posts:**		
Nearest Street				

Buckeye Information		**Property Owner / Excavator /Engineer**	
Date:		**Name:**	
Name:		**Phone:**	
Cell Phone:		**Signature:**	

SPECIAL PROVISION
FOR
CLEANING EXISTING MANHOLES, CATCH BASINS, OR INLETS
CLEANING EXISTING STORM SEWERS AND PIPE CULVERTS

Description. Items for Cleaning of Existing Manholes, Catch Basins, Inlets, Storm Sewers, or Pipe Culverts are included in the Summary of Quantities and are to be used at the direction of the Engineer. The Manholes, Catch Basins, Inlets, Storm Sewers or Pipe Culverts shall be cleaned of silt, debris or other foreign matter of any kind and will be free from such accumulation at the time of final inspection. The accumulations shall be removed from the job site and disposed of in a manner meeting appropriate regulations.

Basis of Payment. This work shall be paid for at the contract unit price each for Cleaning Existing Manholes, Cleaning Existing Catch Basins, Cleaning Existing Inlets and/or per foot of Cleaning Existing Storm Sewers Or Cleaning Existing Pipe Culverts of the length and diameter specified. The cost shall include all labor, materials and disposal cost for removal of accumulations from the job site.

SPECIAL PROVISION
FOR
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT REQUIREMENTS

Description. This project will result in a disturbance of one or more acres of total land area and will require compliance with the National Pollutant Discharge Elimination System (NPDES) Storm Water Permit.

The Cook County Department of Transportation and Highways is the permittee, and all Contractors and Subcontractors involved in any soil disturbing activities will be required to confirm that they understand and will comply with all requirements of the permit by signing a Contractors Certification Statement. The Contractor shall adhere to the plans and complete required documents throughout construction. Documents are attached as part of this Special Provision.

A Storm Water Pollution Prevention Plan (SWPPP) shall be designed by the permittee and included in the project plans to be cooperatively implemented and updated by the Resident Engineer and Contractor for this project using good engineering practices. The plan shall identify potential sources of pollution which may reasonably be expected to affect the quality of storm water discharges. In addition, the plan shall describe and ensure the implementation of best management practices (BMPs) which will be used to reduce the pollutants in storm water discharges associated with this project and assure compliance with the terms and conditions of the Storm Water Permit. Such practices may include mulching, geotextiles, silt fences, sediment traps, storm drain inlet protection and several others mentioned in the permit. The installation of these devices may be subject to Section 404 of the Clean Water Act. The plan will be signed by the County Superintendent of Transportation and Highways and retained on-site.

A Sediment and Erosion Control Inspection Report will be completed once a week and after every ½ inch rainfall (5 inch snowfall event) by the Resident Engineer. All directions to the Contractor for required repairs/maintenance/installation of erosion and sediment control or any other necessary BMPs will be included in the report. The Contractor will sign the report to confirm his/her receipt of a copy.

If any required repairs/maintenance/installation of sediment and erosion control or any other BMPs are not completed by the Contractor or Subcontractors within the time specified by the Engineer (time will vary from 1/2 hour to 1 week based on the urgency of the situation and the nature of the deficiency. The Engineer will be the sole judge), the Resident Engineer shall complete and submit an Incidence of Non-compliance (ION) form to the Illinois Environmental Protection Agency.

Basis of Payment. Temporary erosion control items have been included in the Summary of Quantities. Additional items not included in the Summary of Quantities, but deemed necessary by the Resident Engineer to fulfill the requirements of the NPDES Permit and this Special Provision will be paid for according to Article 109.04 of the State Standard Specifications for Road and Bridge Construction.

Following is the list of documents that comprise the Special Provision for NPDES:

Permit Coverage Letter – Ilr40085 (1 Page)
General NPDES Permit Ilr40 (2 Pages)
General NPDES Permit Ilr10 (10 Pages)
Notice of Intent (3 pages) – *Do not send fee – send form only as notification to IEPA.*
Notice of Termination (2 pages) – *Send form to IEPA at end of construction.*
IEPA Incidence of Non-Compliance Form (1 Page)
Contractor Certification Statement (1 Page)
Erosion and Sediment Control Inspection Checklist (1 Page)
Erosion/Sediment Control Inspection Report (1 Page)
Storm Water Pollution Plan Signed by Superintendent (5 Pages)

ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

1021 NORTH GRAND AVENUE EAST, P.O. Box 19276, SPRINGFIELD, ILLINOIS 62794-9276, 217-782-3397
JAMES R. THOMPSON CENTER, 100 WEST RANDOLPH, SUITE 11-300, CHICAGO, IL 60601, 312-814-6026

217/782 -0610

ROD R. BLAGOJEVICH, GOVERNOR RENEE CIPRIANO, DIRECTOR

2/9/20

COOK COUNTY HIGHWAY DEPT
69 W WASHINGTON ST STE 2100
CHICAGO, IL. 60602

Re: Cook County Highway Dept - Municipal Separate Storm Sewer System NPDES Permit No. ILR400485 County: Cook
Notice of Coverage Under General Permit

Dear NPDES Permittee:

We have received your Notice of Intent and have determined that storm water discharges from your municipal separate storm sewer system are appropriately covered by the attached NPDES general permit issued by the Agency.

The permit as issued covers Notice of Intent requirements, storm water management programs, and monitoring, recordkeeping and reporting requirements. Attached is an Annual Inspection Form that you must complete and submit to the Agency by the first day of June for each year that this permit is in effect.

Failure to meet any portion of the permit could result in civil and/or criminal penalties. The Agency is ready and willing to assist you in interpreting any of the conditions of the permit as they relate to your municipal separate storm sewer system.

Your municipal storm sewer system was automatically covered by this permit 30 days after your Notice of Intent application pursuant to the General Storm Water Permit for MS4's, Part I. Coverage Under This Permit, D. 3. The Agency realizes that you may have implemented part of your program, however, we have reviewed your application for any deficiencies and applicability of the general permit versus an individual permit. The final determination is that the general permit is applicable to your system.

This letter shows your permit number below your name. Please reference this number in all future correspondence. Should you have any questions concerning the permit, please contact the Permit Section at (217) 782-0610.

Very truly yours,

Alan Keller

Alan Keller, P. E.
Manager, Permit Section
Division of Water Pollution Control

Enclosure

AK:MED:\MS4 Coverage Letter cc: Records Unit Des _Plaines

Rockrod Rd P022I North Main Street, Rockford, IL 61103 -(815) 987-7760 • DES PLAINES-9511 W. Harrison St., Des Plaines, IL 60016-(847) 294-4000 ELGIN- 595 South State, Elgin, IL 60123 - (847) 608-3131• PEORIA- 5415 N. University St., Peoria, IL 61614 - (309) 693-5463
BUREAU OF LAND - PEORIA- 7620 N. University St., Peoria, IL 61614 - (309) 693-5462 • CHAMPAIGN - 2125 South First Street, Champaign, IL 61820 - (217) 278-58C SPRINGFIELD- 4500S. Sixth Street Rd., Springfield, IL 62706 -(217) 786-6892 • COLLINSVILLE- 2009 Mall Street, Collinsville, IL 62234 - (618) 346-5120 MARION - 2309 W. Main St., Suite 116, Marion, IL 62959 - (618) 993-7200C

General NPDES Permit No. ILR40

Illinois Environmental Protection Agency
Division of Water Pollution Control
1021 North Grand East
P.O. Box 19276
Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

General NPDES Permit
For
Discharges from Small Municipal Separate Storm Sewer Systems

Expiration Date: March 31, 2014

Issue Date: February 20, 2009

Effective Date: April 1, 2009

In compliance with the provisions of the Illinois Environmental Protection Act, the Illinois Pollution Control Board Rules and Regulations (35 Ill. Adm. Code, Subtitle C, Chapter 1) and the Clean Water Act, the following discharges may be authorized by this permit in accordance with the conditions herein:

Discharges of only storm water from small municipal separate storm sewer systems, as defined and limited herein. Storm water means storm water runoff, snow melt runoff, and surface runoff and drainage.

Receiving waters: Discharges may be authorized to any surface water of the State.

To receive authorization to discharge under this general permit, a facility operator must submit an application as described in the permit conditions to the Illinois Environmental Protection Agency. Authorization, if granted, will be by letter and include a copy of this permit.

Alan Keller

Alan Keller, P.E.
Manager, Permit Section
Division of Water Pollution Control

ILR40.wpd

CONTENTS OF THIS GENERAL PERMIT

PART I. COVERAGE UNDER THIS PERMIT ..... Page 2
PART II. NOTICE OF INTENT REQUIREMENTS ..... Page 3
PART III. SPECIAL CONDITIONS ..... Page 4
PART IV. STORM WATER MANAGEMENT PROGRAMS ..... Page 5
PART V. MONITORING, RECORDKEEPING AND REPORTING ..... Page 9
PART VI. DEFINITIONS AND ACRONYMS ..... Page 10
ATTACHMENT H. STANDARD CONDITIONS ..... Page 12

PART I. COVERAGE UNDER THIS PERMIT

A. Permit Area

This permit covers all areas of the State of Illinois.

B. Eligibility

1. This permit authorizes discharges of storm water from small municipal separate storm sewer systems (MS4s) as defined in 40 CFR 122.26(b)(16) as designated for permit authorization pursuant to 40 CFR 122.32.

2. This permit authorizes the following non-storm water discharges provided they have been determined not to be substantial contributors of pollutants to a particular small MS4 applying for coverage under this permit:

   - water line and fire hydrant flushing,
   - landscape irrigation water,
   - rising ground waters,
   - ground water infiltration,
   - pumped ground water,
   - discharges from potable water sources, (excluding wastewater discharges from water supply treatment plants)
   - foundation drains,
   - air conditioning condensate,
   - irrigation water, (except for wastewater irrigation),
   - springs,
   - water from crawl space pumps,
   - footing drains,
   - storm sewer cleaning water,
   - water from individual residential car washing,
   - routine external building washdown which does not use detergents,
   - flows from riparian habitats and wetlands,
   - dechlorinated pH neutral swimming pool discharges,
   - residual street wash water,
   - discharges or flows from fire fighting activities
   - dechlorinated water reservoir discharges, and
   - pavement washwaters where spills or leaks of toxic or hazardous materials have not occurred (unless all spilled material has been removed).

3. Any municipality covered by this general permit is also granted automatic coverage under Permit No. ILR10 for the discharge of storm water associated with construction site activities for municipal construction projects disturbing one acre or more. The permittee is granted automatic coverage 30 days after Agency receipt of a Notice of Intent to Discharge Storm Water from Construction Site Activities from the permittee. The Agency will provide public notification of the construction site activity and assign a unique permit number for each project during this period. The permittee shall comply with all the requirements of Permit ILR10 for all such construction projects.

C. Limitations on Coverage

The following discharges are not authorized by this permit:

General NPDES Permit No. ILR10

Illinois Environmental Protection Agency
Division of Water Pollution Control
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276
www.epa.state.il.us

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

General NPDES Permit
For
Storm Water Discharges From Construction Site Activities

Expiration Date: July 31, 2013 **Issue Date:** August 11, 2008

Effective Date: August 11, 2008

In compliance with the provisions of the Illinois Environmental Protection Act, the Illinois Pollution Control Board Rules and Regulations (35 Ill. Adm. Code, Subtitle C, Chapter I), and the Clean Water Act, and the regulations thereunder the following discharges are authorized by this permit in accordance with the conditions and attachments herein.

Alan Keller

Alan Keller, P.E.
Manager, Permit Section
Division of Water Pollution Control

Part I. COVERAGE UNDER THIS PERMIT

A. **Permit Area.** The permit covers all areas of the State of Illinois with discharges to any waters of the State.

B. **Eligibility.**

1. This permit shall authorize all discharges of storm water associated with industrial activity from construction sites that will result in the disturbance of one or more acres total land area, construction sites less than one acre of total land that is part of a larger common plan of development or sale if the larger common plan will ultimately disturb one or more acres total land area. This permit also authorizes discharges from construction sites designated by the Agency that have the potential for contribution to a violation of water quality standards or significant contribution of pollutants to waters of the State, occurring after the effective date of this permit (including discharges occurring after the effective date of this permit are also authorized by this permit, except for discharges identified under Part I.B.3 (Limitations on Coverage).

2. This permit may only authorize a storm water discharge associated with industrial activity from a construction site that is mixed with a storm water discharge from an industrial source other than construction, where:

   a. the industrial source other than construction is located on the same site as the construction activity;

   b. storm water discharges associated with industrial activity from the areas of the site where construction activities are occurring are in compliance with the terms of this permit; and

   c. storm water discharges associated with industrial activity from the areas of the site where industrial activity other than construction are occurring (including storm water discharges from dedicated asphalt plants and dedicated concrete plants) are covered by a different NPDES general permit or individual permit authorizing such discharges.

3. **Limitations on Coverage.** The following storm water discharges from construction sites are not authorized by this permit:

   a. storm water discharges associated with industrial activity that originate from the site after construction activities have been completed and the site has undergone final stabilization;

b. discharges that are mixed with sources of non-storm water other than discharges identified in Part III.A (Prohibition on Non-Storm Water Discharges) of this permit and in compliance with paragraph IV.D.5 (Non-Storm Water Discharges) of this permit;

c. storm water discharges associated with industrial activity that are subject to an existing NPDES individual or general permit or which are issued a permit in accordance with Part VI.N (Requiring an Individual Permit or an Alternative General Permit) of this permit. Such discharges may be authorized under this permit after an existing permit expires provided the existing permit did not establish numeric limitations for such discharges;

d. storm water discharges from construction sites that the Agency has determined to be or may reasonably be expected to be contributing to a violation of a water quality standard; and

e. Storm water discharges that the Agency, at its discretion, determines are not appropriately authorized or controlled by this general permit.

f. Storm water discharges to any receiving water specified under 35 Ill. Adm. Code 302.105(d)(6).

C. **Authorization.**

1. In order for storm water discharges from construction sites to be authorized to discharge under this general permit a discharger must submit a Notice of Intent (NOI) in accordance with the requirements of Part II below, using an NOI form provided by the Agency.

2. Where a new contractor is selected after the submittal of an NOI under Part II below, a new Notice of Intent (NOI) must be submitted by the owner in accordance with Part II.

3. For projects that have complied with State law on historic preservation and endangered species prior to submittal of the NOI, through coordination with the Illinois Historic Preservation Agency and the Illinois Department of Natural Resources or through fulfillment of the terms of interagency agreements with those agencies, the NOI shall indicate that such compliance has occurred.

4. Unless notified by the Agency to the contrary, dischargers who submit an NOI in accordance with the requirements of this permit are authorized to discharge storm water from construction sites under the terms and conditions of this permit in 30 days after the date the NOI is received by the Agency.

5. The Agency may deny coverage under this permit and require submittal of an application for an individual NPDES permit based on a review of the NOI or other information.

Part II. NOTICE OF INTENT REQUIREMENTS

A. **Deadlines for Notification.**

1. To receive authorization under this general permit, a discharger must submit a completed Notice of Intent (NOI) in accordance with Part VI.G (Signatory Requirements) and the requirements of this Part in sufficient time to allow a 30 day review period after the receipt of the NOI by the Agency and the start of construction. The completed NOI may be submitted electronically to the following email address: epa.constlir10awppo@illinois.gov

2. Discharges that were previously covered by a valid General NPDES Permit for Storm Water Discharges from Construction Site Activities are automatically covered by this permit.

3. A discharger may submit an NOI in accordance with the requirements of this Part after the start of construction. In such instances, the Agency may bring an enforcement action for any discharges of storm water associated with industrial activity from a construction site that have occurred on or after the start of construction.

B. **Failure to Notify.** Dischargers who fail to notify the Agency of their intent to be covered, and discharge storm water associated with construction site activity to Waters of the State without an NPDES permit, are in violation of the Environmental Protection Act and Clean Water Act.

C. **Contents of Notice of Intent.** The Notice of Intent shall be signed in accordance with Part VI.G (Signatory Requirements) of this permit by all of the entities identified in paragraph 2 below and shall include the following information:

1. The mailing address, and location of the construction site for which the notification is submitted. Where a mailing address for the site is not available, the location can be described in terms of the latitude and longitude of the approximate center of the facility to the nearest 15 seconds, or the nearest quarter section (if the section, township and range is provided) that the construction site is located in;

2. The owner's name, address, telephone number, and status as Federal, State, private, public or other entity;

3. The name, address and telephone number of the general contractor(s) that have been identified at the time of the NOI submittal;

4. The name of the receiving water(s), or if the discharge is through a municipal separate storm sewer, the name of the municipal operator of the storm sewer and the ultimate receiving water(s);

5. The number of any NPDES permit for any discharge (including non-storm water discharges) from the site that is currently authorized by an NPDES permit;

6. A description of the project, detailing the complete scope of the project, estimated timetable for major activities and an estimate of the number of acres of the site on which soil will be disturbed; and

7. An electronic copy of the storm water pollution prevention plan that has been prepared for the site in accordance with Part IV of this permit. The electronic copy shall be submitted to the Agency at the following email address: epa.constlr10swppp@illinois.gov

D. **Where to Submit.**

1. Facilities which discharge storm water associated with construction site activity must use an NOI form provided by the Agency. NOIs must be signed in accordance with Part VI.G (Signatory Requirements) of this permit. NOIs and the applicable fee for construction site activities are to be submitted by certified mail to the Agency at the following address:

   Illinois Environmental Protection Agency
   Division of Water Pollution Control, Mail Code #15
   Attention: Permit Section
   1021 North Grand Avenue East
   Post Office Box 19276
   Springfield, Illinois 62794-9276

   The completed NOI and SWPPP may be submitted electronically to the following email address: epa.constlr10swppp@illinois.gov

2. A copy of the letter of notification of coverage along with the General NPDES Permit for Storm Water Discharges from Construction Site Activities or other indication that storm water discharges from the site are covered under an NPDES permit shall be posted at the site in a prominent place for public viewing (such as alongside a building permit).

E. **Additional Notification.** Facilities which are operating under approved local sediment and erosion plans, grading plans, or storm water management plans, in addition to filing copies of the Notice of Intent in accordance with Part D above, shall also submit signed copies of the Notice of Intent to the local agency approving such plans in accordance with the deadlines in Part A above. See Part IV.D.2.d (Approved State or Local Plans).

F. **Notice of Termination.** Where a site has been finally stabilized and all storm water discharges from construction sites that are authorized by this permit are eliminated, the permittee of the facility must submit a completed Notice of Termination that is signed in accordance with Part VI.G (Signatory Requirements) of this permit.

1. The Notice of Termination shall include the following information:

   a. The mailing address, and location of the construction site for which the notification is submitted. Where a mailing address for the site is not available, the location can be described in terms of the latitude and longitude of the approximate center of the facility to the nearest 15 seconds, or the nearest quarter section (if the section, township and range is provided) that the construction site is located in;

   b. The owner's name, address, telephone number, and status as Federal, State, private, public or other entity;

   c. The name, address and telephone number of the general contractor(s); and

   d. The following certification signed in accordance with Part VI.G (Signatory Requirements) of this permit:

      "I certify under penalty of law that all storm water discharges associated with construction site activity from the identified facility that are authorized by NPDES general permit ILR10 have otherwise been eliminated. I understand that by submitting this notice of termination, that I am no longer authorized to discharge storm water associated with construction site activity by the general permit, and that discharging pollutants in storm water associated with construction site activity to Waters of the State is unlawful under the Environmental Protection Act and Clean Water Act where the discharge is not authorized by a NPDES permit. I also understand that the submittal of this notice of termination does not release an operator from liability for any violations of this permit or the Clean Water Act."

      For the purposes of this certification, elimination of storm water discharges associated with industrial activity means that all disturbed soils at the identified facility have been finally stabilized and temporary erosion and sediment control measures have been removed or will be removed at an appropriate time, or that all storm water discharges associated with construction activities from the identified site that are authorized by a NPDES general permit have otherwise been eliminated.

2. All Notices of Termination are to be sent to the Agency to the mailing address in Part II.D.1, using the form provided by the Agency.

Part III. SPECIAL CONDITIONS, MANAGEMENT PRACTICES, AND OTHER NON-NUMERIC LIMITATIONS

A. **Prohibition on Non-Storm Water Discharges.**

1. Except as provided in Part I paragraph B.2 and paragraph 2 below, all discharges covered by this permit shall be composed entirely of storm water.

2. a. Except as provided in paragraph b below, discharges of materials other than storm water must be in compliance with a NPDES permit (other than this permit) issued for the discharge.

b. The following non-storm water discharges may be authorized by this permit provided the non-storm water component of the discharges is in compliance with Part IV.D.5 (Non-Storm Water Discharges): discharges from fire fighting activities; fire hydrant flushings; waters used to wash vehicles where detergents are not used; waters used to control dust; potable water sources including uncontaminated waterline flushings; landscape irrigation drainages; routine external building washdown which does not use detergents; pavement washwaters where spills or leaks of toxic or hazardous materials have not occurred (unless all spilled material has been removed) and where detergents are not used; uncontaminated air conditioning condensate; springs; uncontaminated ground water; and foundation or footing drains where flows are not contaminated with process materials such as solvents.

B. **Discharges into Receiving Waters With an Approved Total Maximum Daily Load (TMDL):**

Discharges to waters for which there is a TMDL allocation for sediment or a parameter that addressed sediment (such as total suspended solids, turbidity, or siltation) are not eligible for coverage under this permit unless you develop and certify a SWPPP that is consistent with the assumptions and requirements in the approved TMDL. To be eligible for coverage under this general permit, operators must incorporate into their SWPPP any conditions applicable to their discharges necessary for consistency with the assumptions and requirements of the TMDL within any timeframes established in the TMDL. If a specific numeric waste load allocation has been established that would apply to the project's discharges, the operator must incorporate that allocation into its SWPPP and implement necessary steps to meet that allocation. Please refer to the Agency website at: http://www.epa.state.il.us/water/tmdl/report-status.html

C. Discharges covered by this permit, alone or in combination with other sources, shall not cause or contribute to a violation of any applicable water quality standard.

Part IV. STORM WATER POLLUTION PREVENTION PLANS

A storm water pollution prevention plan shall be developed for each construction site covered by this permit. Storm water pollution prevention plans shall be prepared in accordance with good engineering practices. The plan shall identify potential sources of pollution which may reasonably be expected to affect the quality of storm water discharges associated with construction site activity from the facility. In addition, the plan shall describe and ensure the implementation of best management practices which will be used to reduce the pollutants in storm water discharges associated with construction site activity and to assure compliance with the terms and conditions of this permit. Facilities must implement the provisions of the storm water pollution prevention plan required under this part as a condition of this permit.

A. **Deadlines for Plan Preparation and Compliance.**

The plan shall:

1. Be completed prior to the start of the construction to be covered under this permit and submitted electronically to the Agency; and

2. Provide for compliance with the terms and schedule of the plan beginning with the initiation of construction activities.

B. **Signature, Plan Review and Notification.**

1. The plan shall be signed in accordance with Part VI.G (Signatory Requirements), and be retained on-site at the facility which generates the storm water discharge in accordance with Part VI.E (Duty to Provide Information) of this permit.

2. Prior to commencement of construction, the permittee shall provide the plan to the Agency. Said plan shall be available at the site.

3. The permittee shall make plans available upon request from this Agency or a local agency approving sediment and erosion plans, grading plans, or storm water management plans; or in the case of a storm water discharge associated with industrial activity which discharges through a municipal separate storm sewer system with an NPDES permit, to the municipal operator of the system.

4. The Agency may notify the permittee at any time that the plan does not meet one or more of the minimum requirements of this Part. Such notification shall identify those provisions of the permit which are not being met by the plan, and identify which provisions of the plan require modifications in order to meet the minimum requirements of this part. Within 7 days from receipt of notification from the Agency, the permittee shall make the required changes to the plan and shall submit to the Agency a written certification that the requested changes have been made. Failure to comply shall terminate authorization under this permit.

5. All storm water pollution prevention plans and all completed inspection forms/reports required under this permit are considered reports that shall be available to the public at any reasonable time upon request. However, the permittee may claim any portion of a storm water pollution prevention plan as confidential in accordance with 40 CFR Part 2.

C. **Keeping Plans Current.** The permittee shall amend the plan whenever there is a change in design, construction, operation, or maintenance, which has a significant effect on the potential for the discharge of pollutants to Waters of the State and which has not otherwise been addressed in the plan or if the storm water pollution prevention plan proves to be ineffective in eliminating or significantly minimizing pollutants from sources identified under paragraph D.2 below, or in otherwise achieving the general objectives of controlling pollutants in storm water discharges associated with construction site activity. In addition, the plan shall be amended to identify any new contractor and/or subcontractor that will implement a measure of the storm water pollution prevention plan. Amendments to the plan may be reviewed by the Agency in the same manner as Part IV.B above. Any revisions of the documents for the storm water pollution prevention plan shall be kept on site at all times.

D. **Contents of Plan.** The storm water pollution prevention plan shall include the following items:

1. **Site Description.** Each plan shall, provide a description of the following:

a. A description of the nature of the construction activity or demolition work.

b. A description of the intended sequence of major activities which disturb soils for major portions of the site (e.g. clearing, grubbing, excavation, grading);

c. An estimate of the total area of the site and the total area of the site that is expected to be disturbed by excavation, grading, or other activities;

d. An estimate of the runoff coefficient of the site after construction activities are completed and existing data describing the soil or the quality of any discharge from the site;

e. A site map indicating drainage patterns and approximate slopes anticipated before and after major grading activities, locations where vehicles enter or exit the site and controls to prevent offsite sediment tracking, areas of soil disturbance, the location of major structural and nonstructural controls identified in the plan, the location of areas where stabilization practices are expected to occur, surface waters (including wetlands), and locations where storm water is discharged to a surface water; and

f. The name of the receiving water(s) and the ultimate receiving water(s), and areal extent of wetland acreage at the site.

2. **Controls.** Each plan shall include a description of appropriate controls that will be implemented at the construction site. The Illinois Urban Manual (http://www.il.nrcs.usda.gov/technical/engineer/urban/index.html) or other similar documents shall be used for developing the appropriate management practices, controls or revisions of the plan. The plan will clearly describe for each major activity identified in paragraph D.1 above, appropriate controls and the timing during the construction process that the controls will be implemented. (For example, perimeter controls for one portion of the site will be installed after the clearing and grubbing necessary for installation of the measure, but before the clearing and grubbing for the remaining portions of the site. Perimeter controls will be actively maintained until final stabilization of those portions of the site upward of the perimeter control. Temporary perimeter controls will be removed after final stabilization). The description of controls shall address as appropriate the following minimum components.

a. **Erosion and Sediment Controls**

(i) **Stabilization Practices.** A description of interim and permanent stabilization practices, including site-specific scheduling of the implementation of the practices. Site plans should ensure that existing vegetation is preserved where practicable and that disturbed portions of the site are stabilized. Stabilization practices may include: temporarily seeding, permanent seeding, mulching, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, preservation of mature vegetation, staged or staggered development, and other appropriate measures. A record of the dates when major grading activities occur, when construction activities temporarily or permanently cease on a portion of the site, and when stabilization measures are initiated shall be included in the plan. Except as provided in paragraphs (A) and (B) below, stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, but in no case more than 7 days after the construction activity in that portion of the site has temporarily or permanently ceased as follows:

(A) Where the initiation of stabilization measures by the 7th day after construction activity temporarily or permanently ceases on a portion of the site is precluded by snow cover, stabilization measures shall be initiated as soon as practicable.

(B) Where construction activity will resume on a portion of the site within 14 days from when activities ceased, (e.g. the total time period that construction activity is temporarily ceased is less than 14 days) then stabilization measures do not have to be initiated on that portion of site by the 7th day after construction activity temporarily ceased.

(ii) **Structural Practices.** A description of structural practices utilized to divert flows from exposed soils, store flows or otherwise limit runoff and the discharge of pollutants from exposed areas of the site. Such practices may include silt fences, earth dikes, drainage swales, sediment traps, check dams, subsurface drains, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions, and temporary or permanent sediment basins. Structural practices should be placed on upland soils to the degree practicable. The installation of these devices may be subject to Section 404 of the CWA.

(iii) **Best Management Practices for Impaired Waters.** For any site which discharges directly to an impaired water identified on the Agency's website for 303(d) listing for suspended solids, turbidity, or siltation the storm water pollution prevention plan shall be designed for a storm event equal to or greater than a 25-year 24-hour rainfall event. If required by federal regulations or the Illinois Environmental Protection Agency's Illinois Urban Manual, the storm water pollution prevention plan shall adhere to a more restrictive design criteria. Please refer to the Agency's website at: (http://www.epa.state.il.us/water/tmdl/303d-list.html)

b. **Storm Water Management.** A description of measures that will be installed during the construction process to control pollutants in storm water discharges that will occur after construction operations have been completed. Structural measures should be placed on upland soils to the degree attainable. The installation of these devices may be subject to Section 404 of the CWA. This permit only addresses the installation of storm water management measures, and not the ultimate operation and maintenance of such structures after the construction activities have been completed and the site has undergone final stabilization. Permittees are responsible for only the installation and maintenance of storm water management measures prior to final stabilization of the site, and are not responsible for maintenance after storm water discharges associated with industrial activity have been eliminated from the site.

(i) Such practices may include: storm water detention structures (including wet ponds); storm water retention structures; flow attenuation by use of open vegetated swales and natural depressions; infiltration of runoff onsite; and sequential systems (which combine several practices). The storm water pollution prevention plan shall include an explanation of the technical basis used to select the practices to control pollution where flows exceed predevelopment levels.

(ii) Velocity dissipation devices shall be placed at discharge locations and along the length of any outfall channel as necessary to provide a non-erosive velocity flow from the structure to a water course so that the natural physical and biological characteristics and functions are

maintained and protected (e.g. maintenance of hydrologic conditions, such as the hydroperiod and hydrodynamics present prior to the initiation of construction activities).

(iii) Unless otherwise specified in the Illinois Environmental Protection Agency's Illinois Urban Manual, the storm water pollution prevention plan shall be designed for a storm event equal to or greater than a 25-year 24-hour rainfall event.

b. **Other Controls.**

(i) **Waste Disposal.** No solid materials, including building materials, shall be discharged to Waters of the State, except as authorized by a Section 404 permit.

(ii) The plan shall ensure and demonstrate compliance with applicable State and/or local waste disposal, sanitary sewer or septic system regulations.

(iii) For construction sites that receive concrete or asphalt from off site locations, the plan must identify and include appropriate controls and measures to reduce or eliminate these discharges.

d. **Approved State or Local Plans.**

(i) The management practices, controls and other provisions contained in the storm water pollution prevention plan must be at least as protective as the requirements contained in Illinois Environmental Protection Agency's Illinois Urban Manual, 2002. Facilities which discharge storm water associated with construction site activities must include in their storm water pollution prevention plan procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials. Requirements specified in sediment and erosion site plans or site permits or storm water management site plans or site permits approved by local officials that are applicable to protecting surface water resources are, upon submittal of an NOI to be authorized to discharge under this permit, incorporated by reference and are enforceable under this permit. The plans shall include all requirements of this permit and include more stringent standards required by any local approval. This provision does not apply to provisions of master plans, comprehensive plans, non-enforceable guidelines or technical guidance documents that are not identified in a specific plan or permit that is issued for the construction site.

(ii) Dischargers seeking alternative permit requirements are not authorized by this permit and shall submit an individual permit application in accordance with 40 CFR 122.28 at the address indicated in Part II.D (Where to Submit) of this permit, along with a description of why requirements in approved local plans or permits should not be applicable as a condition of an NPDES permit.

3. **Maintenance.** The plan shall include a description of procedures to maintain in good and effective operating conditions vegetation, erosion and sediment control measures and other protective measures identified in the site plan.

4. **Inspections.** Qualified personnel (provided by the permittee) shall inspect disturbed areas of the construction site that have not been finally stabilized, structural control measures, and locations where vehicles enter or exit the site at least once every seven calendar days and within 24 hours of the end of a storm that is 0.5 inches or greater or equivalent snowfall. Qualified personnel means a person knowledgeable in the principles and practices of erosion and sediment controls measures, such as a licensed Professional Engineer (P.E.), a Certified Professional in Erosion and Sediment Control (CPESC), a Certified Erosion Sediment and Storm Water Inspector (CESSWI) or other knowledgeable person who possesses the skills to assess conditions at the construction site that could impact storm water quality and to assess the effectiveness of any sediment and erosion control measures selected to control the quality of storm water discharges from the construction activities.

a. Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the plan shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Locations where vehicles enter or exit the site shall be inspected for evidence of offsite sediment tracking.

b. Based on the results of the inspection, the description of potential pollutant sources identified in the plan in accordance with Part IV.D.1 (Site Description) of this permit and pollution prevention measures identified in the plan in accordance with Part IV.D.2 (Controls) of this permit shall be revised as appropriate as soon as practicable after such inspection. Such modifications shall provide for timely implementation of any changes to the plan within 7 calendar days following the inspection.

c. A report summarizing the scope of the inspection, name(s) and qualifications of personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of the storm water pollution prevention plan, and actions taken in accordance with paragraph b above shall be made and retained as part of the storm water pollution prevention plan for at least three years from the date that the permit coverage expires or is terminated. All inspection reports shall be retained at the construction site. The report shall be signed in accordance with Part VI.G (Signatory Requirements) of this permit.

d. The permittee shall notify the appropriate Agency Field Operations Section office by email at: epa.swnncomp@illinois.gov , telephone or fax within 24 hours of any incidence of noncompliance for any violation of the storm water pollution prevention plan observed during any inspection conducted, or for violations of any condition of this permit. The permittee shall complete and submit within 5 days an "Incidence of Noncompliance" (ION) report for any violation of the storm water pollution prevention plan observed during any inspection conducted, or for violations of any condition of this permit. Submission shall be on forms provided by the Agency and include specific information on the cause of noncompliance, actions which were taken to prevent any further causes of noncompliance, and a statement detailing any environmental impact which may have resulted from the noncompliance.

e. All reports of noncompliance shall be signed by a responsible authority as defined in Part VI.G (Signatory Requirements).

f. After the initial contact has been made with the appropriate Agency Field Operations Section Office, all reports of noncompliance shall be mailed to the Agency at the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Compliance Assurance Section
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276

5. **Non-Storm Water Discharges.** Except for flows from fire fighting activities, sources of non-storm water listed in Part III.A.2 of this permit that are combined with storm water discharges associated with industrial activity must be identified in the plan. The plan shall identify and insure the implementation of appropriate pollution prevention measures for the non-storm water component(s) of the discharge.

E. **Additional requirements for storm water discharges from industrial activities other than construction, including dedicated asphalt plants, and dedicated concrete plants.** This permit may only authorize any storm water discharge associated with industrial activity from a construction site that is mixed with a storm water discharge from an industrial source other than construction, where:

1. The industrial source other than construction is located on the same site as the construction activity;

2. Storm water discharges associated with industrial activity from the areas of the site where construction activities are occurring are in compliance with the terms of this permit; and

3. Storm water discharges associated with industrial activity from the areas of the site where industrial activity other than construction are occurring (including storm water discharges from dedicated asphalt plants (other than asphalt emulsion facilities) and dedicated concrete plants) are in compliance with the terms, including applicable NOI or application requirements, of a different NPDES general permit or individual permit authorizing such discharges.

F. **Contractors.**

1. The storm water pollution prevention plan must clearly identify for each measure identified in the plan, the contractor(s) or subcontractor(s) that will implement the measure. All contractors and subcontractors identified in the plan must sign a copy of the certification statement in paragraph 2 below in accordance with Part VI.G (Signatory Requirements) of this permit. All certifications must be included in the storm water pollution prevention plan except for owners that are acting as contractors.

2. **Certification Statement.** All contractors and subcontractors identified in a storm water pollution prevention plan in accordance with paragraph 1 above shall sign a copy of the following certification statement before conducting any professional service at the site identified in the storm water pollution prevention plan:

"I certify under penalty of law that I understand the terms and conditions of the general National Pollutant Discharge Elimination System (NPDES) permit (ILR10) that authorizes the storm water discharges associated with industrial activity from the construction site identified as part of this certification."

The certification must include the name and title of the person providing the signature in accordance with Part VI.G of this permit; the name, address and telephone number of the contracting firm; the address (or other identifying description) of the site; and the date the certification is made.

Part V. RETENTION OF RECORDS

A. The permittee shall retain copies of storm water pollution prevention plans and all reports and notices required by this permit, and records of all data used to complete the Notice of Intent to be covered by this permit, for a period of at least three years from the date that the permit coverage expires or is terminated. This period may be extended by request of the Agency at any time.

B. The permittee shall retain a copy of the storm water pollution prevention plan and any revisions to said plan required by this permit at the construction site from the date of project initiation to the date of final stabilization.

Part VI. STANDARD PERMIT CONDITIONS

A. **Duty to Comply.** The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Illinois Environmental Protection Act and the CWA and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application.

B. **Continuation of the Expired General Permit.** This permit expires five years from the date of issuance. An expired general permit continues in force and effect until a new general permit or an individual permit is issued. Only those facilities authorized to discharge under the expiring general permit are covered by the continued permit.

C. **Need to halt or reduce activity not a defense.** It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

D. **Duty to Mitigate.** The permittee shall take all reasonable steps to minimize or prevent any discharge in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.

E. **Duty to Provide Information.** The permittee shall furnish within a reasonable time to the Agency or local agency approving sediment and erosion control plans, grading plans, or storm water management plans; or in the case of a storm water discharge associated with industrial activity which discharges through a municipal separate storm sewer system with an NPDES permit, to the municipal operator of the system, any information which is requested to determine compliance with this permit. Upon request, the permittee shall also furnish to the Agency or local agency approving sediment and erosion control plans, grading plans, or storm water management plans; or in the case of a storm water discharge associated with industrial activity which discharges through a municipal separate storm sewer system with an NPDES permit, to the municipal operator of the system, copies of all records required to be kept by this permit.

F. **Other Information.** When the permittee becomes aware that he or she failed to submit any relevant facts or submitted incorrect information in the Notice of Intent or in any other report to the Agency, he or she shall promptly submit such facts or information.

G. **Signatory Requirements.** All Notices of Intent, storm water pollution prevention plans, reports, certifications or information either submitted to the Agency or the operator of a large or medium municipal separate storm sewer system, or that this permit requires be maintained by the permittee, shall be signed.

1. All Notices of Intent shall be signed as follows:

   a. For a corporation: by a responsible corporate officer. For the purpose of this section, a responsible corporate officer means: (1) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the corporation; or (2) any person authorized to sign documents, that has been assigned or delegated said authority in accordance with corporate procedures;

   b. For a partnership or sole proprietorship: by a general partner or the proprietor, respectively; or

   c. For a municipality, State, Federal, or other public agency: by either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a Federal agency includes (1) the chief executive officer of the agency, or (2) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency.

2. All reports required by the permit and other information requested by the Agency shall be signed by a person described above or by a duly authorized representative of that person. A person is a duly authorized representative only if:

   a. The authorization is made in writing by a person described above and submitted to the Agency.

   b. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of manager, operator, superintendent, or position of equivalent responsibility or an individual or position having overall responsibility for environmental matters for the company. (A duly authorized representative may thus be either a named individual or any individual occupying a named position).

   c. **Changes to Authorization.** If an authorization under Part I.C (Authorization) is no longer accurate because a different individual or position has responsibility for the overall operation of the construction site, a new authorization satisfying the requirements of Part I.C must be submitted to the Agency prior to or together with any reports, information, or applications to be signed by an authorized representative.

   d. **Certification.** Any person signing documents under this Part shall make the following certification:

      "I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

H. **Penalties for Falsification of Reports.** Section 309(c)(4) of the Clean Water Act provides that any person who knowingly makes any false material statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including reports of compliance or noncompliance shall, upon conviction, be punished by a fine of not more than $10,000, or by imprisonment for not more than 2 years, or by both. Section 44(j)(4) and (5) of the Environmental Protection Act provides that any person who knowingly makes any false statement, representation, or certification in an application form, or form pertaining to a NPDES permit commits a Class A misdemeanor, and in addition to any other penalties provided by law is subject to a fine not to exceed $10,000 for each day of violation.

I. **Penalties for Falsification of Monitoring Systems.** The CWA provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by fines and imprisonment described in Section 309 of the CWA. The Environmental Protection Act provides that any person who knowingly renders inaccurate any monitoring device or record required in connection with any NPDES permit or with any discharge which is subject to the provisions of subsection (f) of Section 12 of the Act commits a Class A misdemeanor, and in addition to any other penalties provided by law is subject to a fine not to exceed $10,000 for each day of violation.

J. **Oil and Hazardous Substance Liability.** Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject under section 311 of the CWA.

K. **Property Rights.** The issuance of this permit does not convey any property rights of any sort, nor any exclusive privileges, nor does it authorize any injury to private property nor any invasion of personal rights, nor any infringement of Federal, State or local laws or regulations.

L. **Severability.** The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

M. **Transfers.** This permit is not transferable to any person except after notice to the Agency. The Agency may require the discharger to apply for and obtain an individual NPDES permit as stated in Part I.C (Authorization).

N. **Requiring an Individual Permit or an Alternative General Permit.**

1. The Agency may require any person authorized by this permit to apply for and/or obtain either an individual NPDES permit or an alternative NPDES general permit. Any interested person may petition the Agency to take action under this paragraph. Where the Agency requires a discharger authorized to discharge under this permit to apply for an individual NPDES permit, the Agency shall notify the discharger in writing that a permit application is required. This notification shall include a brief statement of the reasons for this decision, an application form, a statement setting a deadline for the discharger to file the application, and a statement that on the effective date of the individual NPDES permit or the alternative general permit as it applies to the individual permittee, coverage under this general permit shall automatically terminate. Applications shall be submitted to the Agency indicated in Part II.D (Where to Submit) of this permit. The Agency may grant additional time to submit the application upon request of the applicant. If a discharger fails to submit in a timely manner an individual NPDES permit application as required by the Agency under this paragraph, then the applicability of this permit to the individual NPDES permittee is automatically terminated at the end of the day specified by the Agency for application submittal. The Agency may require an individual NPDES permit based on:

   a. information received which indicates the receiving water may be of particular biological significance pursuant to 35 Ill. Adm. Code 302.105(d)(6);

   b. whether the receiving waters are impaired waters for suspended solids, turbidity or siltation as identified by the Agency's 303(d) listing;

   c. size of construction site, proximity of site to the receiving stream, etc.

   The Agency may also require monitoring of any storm water discharge from any site to determine whether an individual permit is required.

2. Any discharger authorized by this permit may request to be excluded from the coverage of this permit by applying for an individual permit. In such cases, the permittee shall submit an individual application in accordance with the requirements of 40 CFR 122.26(c)(1)(ii), with reasons supporting the request, to the Agency at the address indicated in Part II.D (Where to Submit) of this permit. The request may be granted by issuance of any individual permit or an alternative general permit if the reasons cited by the permittee are adequate to support the request.

3. When an individual NPDES permit is issued to a discharger otherwise subject to this permit, or the discharger is authorized to discharge under an alternative NPDES general permit, the applicability of this permit to the individual NPDES permittee is automatically terminated on the effective date of the individual permit or the date of authorization of coverage under the alternative general permit, whichever the case may be. When an individual NPDES permit is denied to a discharger otherwise subject to this permit, or the discharger is denied for coverage under an alternative NPDES general permit, the applicability of this permit to the individual NPDES permittee remains in effect, unless otherwise specified by the Agency.

O. **State/Environmental Laws.** No condition of this permit shall release the permittee from any responsibility or requirements under other environmental statutes or regulations.

P. **Proper Operation and Maintenance.** The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit and with the requirements of storm water pollution prevention plans. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. Proper operation and maintenance requires the operation of backup or auxiliary facilities or similar systems, installed by a permittee only when necessary to achieve compliance with the conditions of the permit.

Q. **Inspection and Entry.** The permittee shall allow the IEPA, or an authorized representative upon presentation of credentials and other documents as may be required by law, to:

1. Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;

2. Have access to and copy at reasonable times, any records that must be kept under the conditions of this permit;

3. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and

4. Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location.

R. **Permit Actions.** This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.

Part VII. REOPENER CLAUSE

A. If there is evidence indicating potential or realized impacts on water quality due to any storm water discharge associated with industrial activity covered by this permit, the discharger may be required to obtain an individual permit or an alternative general permit in accordance with Part I.C (Authorization) of this permit or the permit may be modified to include different limitations and/or requirements.

B. Permit modification or revocation will be conducted according to provisions of 35 Ill. Adm. Code, Subtitle C, Chapter I and the provisions of 40 CFR 122.62, 122.63, 122.64 and 124.5 and any other applicable public participation procedures.

C. The Agency will reopen and modify this permit under the following circumstances:

1. the U.S. EPA amends its regulations concerning public participation;

2. a court of competent jurisdiction binding in the State of Illinois or the 7th Circuit Court of Appeals issues an order necessitating a modification of public participation for general permits, or

3. to incorporate federally required modifications to the substantive requirements of this permit.

Part VIII. DEFINITIONS

"Agency" means the Illinois Environmental Protection Agency.

"Best Management Practices" ("BMPs") means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of waters of the United States. BMPs also include treatment requirements, operating procedures, and practices to control construction site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

"Commencement of Construction or Demolition Activities" The initial disturbance of soils associated with clearing, grading, or excavating activities or other construction or demolition activities.

"CWA" means Clean Water Act (formerly referred to as the Federal Water Pollution Control Act or Federal Water Pollution Control Act Amendments of 1972) Pub. L. 92-500, as amended Pub. L. 95-217, Pub. L. 95-576, Pub. L. 96-483 and Pub. L. 97-117, 33 U.S.C. 1251 et seq.).

"Dedicated portable asphalt plant" A portable asphalt plant that is located on or contiguous to a construction site and that provides asphalt only to the construction site that the plant is located on or adjacent to. The term dedicated portable asphalt plant does not include facilities that are subject to the asphalt emulsion effluent limitation guideline at 40 CFR 443.

"Dedicated portable concrete plant" A portable concrete plant that is located on or contiguous to a construction site and that provides concrete only to the construction site that the plant is located on or adjacent to.

"Dedicated sand or gravel operation" An operation that produces sand and/or gravel for a single construction project.

"Director" means the Director of the Illinois Environmental Protection Agency or an authorized representative.

"Final Stabilization" means that all soil disturbing activities at the site have been completed, and either of the two following conditions are met:

(i) A uniform (e.g., evenly distributed, without large bare areas) perennial vegetative cover with a density of 70 percent of the native background vegetative cover for the area has been established on all unpaved areas and areas not covered by permanent structures, or

(ii) Equivalent permanent stabilization measures (such as the use of riprap, gabions, or geotextiles) have been employed.

For individual lots in residential construction, final stabilization means that either:

(i) The homebuilder has completed final stabilization as specified above, or

(ii) The homebuilder has established temporary stabilization including perimeter controls for an individual lot prior to occupation of the home by the homeowner and informing the homeowner of the need for, and benefits of, final stabilization.

"Large and Medium municipal separate storm sewer system" means all municipal separate storm sewers that are either:

(i) Located in an incorporated place (city) with a population of 100,000 or more as determined by the latest Decennial Census by the Bureau of Census (these cities are listed in Appendices F and G of 40 CFR Part 122); or

(ii) Located in the counties with unincorporated urbanized populations of 100,000 or more, except municipal separate storm sewers that are located in the incorporated places, townships or towns within such counties (these counties are listed in Appendices H and I of 40 CFR Part 122); or

(iii) Owned or operated by a municipality other than those described in paragraph (i) or (ii) and that are designated by the Director as part of the large or medium municipal separate storm sewer system.

"NOI" means notice of intent to be covered by this permit (see Part II of this permit.)

"Point Source" means any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel or other floating craft from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture or agricultural storm water runoff.

"Runoff coefficient" means the fraction of total rainfall that will appear at the conveyance as runoff.

"Storm Water" means storm water runoff, snow melt runoff, and surface runoff and drainage.

"Storm Water Associated with Industrial Activity" means the discharge from any conveyance which is used for collecting and conveying storm water and which is directly related to manufacturing, processing or raw materials storage areas at an industrial plant. The term does not include discharges from facilities or activities excluded from the NPDES program. For the categories of industries identified in subparagraphs (i) through (xi) of this subsection, the term includes, but is not limited to, storm water discharges from industrial plant yards, immediate access roads and rail lines used or traversed by carriers of raw materials, manufactured products, waste material, or by-products used or created by the facility; material handling sites; refuse sites; sites used for the application or disposal of process waste waters (as defined at 40 CFR 401); sites used for the storage and maintenance of material handling equipment; sites used for residual treatment, storage, or disposal; shipping and receiving areas; manufacturing buildings; storage areas (including tank farms) for raw materials, and intermediate and finished products; and areas where industrial activity has taken place in the past and significant materials remain and are exposed to storm water. For the categories of industries identified in subparagraph (xi), the term includes only storm water discharges from all areas listed in the previous sentence (except access roads) where material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, or industrial machinery are exposed to storm water. For the purposes of this paragraph, material handling activities include the storage, loading and unloading, transportation, or conveyance of any raw material, intermediate product, finished product, by-product or waste product. The term excludes areas located on plant lands separate from the plant's industrial activities, such as office buildings and accompanying parking lots as long as the drainage from the excluded areas is not mixed with storm water drained from the above-described areas. Industrial facilities (including industrial facilities that are Federally or municipally owned or operated that meet the description of the facilities listed in this paragraph (i)-(xi)) include those facilities designated under 40 CFR 122.26(a)(1)(v). The following categories of facilities are considered to be engaging in "industrial activity" for purposes of this subsection:

(i) Facilities subject to storm water effluent limitations guidelines, new source performance standards, or toxic pollutant effluent standards under 40 CFR Subchapter N (except facilities with toxic pollutant effluent standards which are exempted under category (xi) of this paragraph);

(ii) Facilities classified as Standard Industrial Classifications 24 (except 2434), 26 (except 265 and 267), 28, 29, 311, 32, 33, 3441, 373;

(iii) Facilities classified as Standard Industrial Classifications 10 through 14 (mineral industry) including active or inactive mining operations (except for areas of coal mining operations meeting the definition of a reclamation area under 40 CFR 434.11(l)) and oil and gas exploration, production, processing, or treatment operations, or transmission facilities that discharge storm water contaminated by contact with or that has come into contact with, any overburden, raw material, intermediate products, finished products, byproducts or waste products located on the site of such operations; inactive mining operations are mining sites that are not being actively mined, but which have an identifiable owner/operator;

(iv) Hazardous waste treatment, storage, or disposal facilities, including those that are operating under interim status or a permit under Subtitle C of RCRA;

(v) Landfills, land application sites, and open dumps that have received any industrial wastes (waste that is received from any of the facilities described under this subsection) including those that are subject to regulation under Subtitle D of RCRA;

(vi) Facilities involved in the recycling of materials, including metal scrapyards, battery reclaimers, salvage yards, and automobile junkyards, including but limited to those classified as Standard Industrial Classification 5015 and 5093;

(vii) Steam electric power generating facilities, including coal handling sites;

(viii) Transportation facilities classified as Standard Industrial Classifications 40, 41, 42, 44, and 45 which have vehicle maintenance shops, equipment cleaning operations, or airport deicing operations. Only those portions of the facility that are either involved in vehicle maintenance (including vehicle rehabilitation, mechanical repairs, painting, fueling, and lubrication), equipment cleaning operations, airport deicing operations, or which are otherwise identified under subparagraphs (i)-(vii) or (ix)-(xi) of this subsection are associated with industrial activity;

(ix) Treatment works treating domestic sewage or any other sewage sludge or wastewater treatment device or system, used in the storage treatment, recycling, and reclamation of municipal or domestic sewage, including land dedicated to the disposal of sewage sludge that are located within the confines of the facility, with a design flow of 1.0 mgd or more, or required to have an approved pretreatment program under 40 CFR 403. Not included are farm lands, domestic gardens or lands used for sludge management where sludge is beneficially reused and which are not physically located in the confines of the facility, or areas that are in compliance with 40 CFR 503;

(x) Construction activity including clearing, grading and excavation activities except: operations that result in the disturbance of less than one acre of total land area which are not part of a larger common plan of development or sale unless otherwise designated by the Agency pursuant to Part I.B.1.

(xi) Facilities under Standard Industrial Classifications 20, 21, 22, 23, 2434, 25, 265, 267, 27, 283, 31 (except 311), 34 (except 3441), 35, 36, 37 (except 373), 38, 39, 4221-25, (and which are not otherwise included within categories (i)-(x)).

"Waters" mean all accumulations of water, surface and underground, natural, and artificial, public and private, or parts thereof, which are wholly or partially within, flow through, or border upon the State of Illinois, except that sewers and treatment works are not included except as specially mentioned; provided, that nothing herein contained shall authorize the use of natural or otherwise protected waters as sewers or treatment works except that in-stream aeration under Agency permit is allowable.

ILR10TMLPMT_FINALB-11-08.doc

Illinois Environmental Protection Agency

Bureau of Water • 1021 North Grand Avenue East • P.O. Box 19276 • Springfield • Illinois • 62794-9276

Division of Water Pollution Control
Notice of Intent (NOI) for General Permit
to Discharge Storm Water Associated with Construction Site Activities

This fillable form may be completed online, a copy saved locally, printed and signed before it is submitted to the Permit Section at the above address.

For Office Use Only

Permit No. ILR10 _____

OWNER INFORMATION

Company/Owner Name: _____

Mailing Address: _____ Phone: _____

City: _____ State: ___ Zip: _____ Fax: _____

Contact Person: _____ E-mail: _____

Owner Type (select one) _____

MS4 Community: ☐ Yes ☐ No

CONTRACTOR INFORMATION

Contractor Name: _____

Mailing Address: _____ Phone: _____

City: _____ State: ___ Zip: _____ Fax: _____

CONSTRUCTION SITE INFORMATION

Select One: ☐ New ☐ Change of information for: ILR10 _____

Project Name: _____ County: _____

Street Address: _____ City: _____ IL Zip: _____

Latitude: _____ _____ _____ Longitude: _____ _____ _____ _____ _____ _____

(Deg) (Min) (Sec) (Deg) (Min) (Sec) Section Township Range

Approximate Construction Start Date: _____ Approximate Construction End Date: _____

Total size of construction site in acres: _____

If less than 1 acre, is the site part of a larger common plan of development?

☐ Yes ☐ No

Fee Schedule for Construction Sites:
Less than 5 acres - $250
5 or more acres - $750

STORM WATER POLLUTION PREVENTION PLAN (SWPPP)

Has the SWPPP been submitted to the Agency? ☐ Yes ☐ No

(Submit SWPPP electronically to: epa.constlr10swppp@illinois.gov)

Location of SWPPP for viewing: Address: _____ City: _____

SWPPP contact information: Inspector qualifications:

Contact Name: _____

Phone: _____ Fax: _____ E-mail: _____

Project inspector, if different from above Inspector qualifications:

Inspector's Name: _____

Phone: _____ Fax: _____ E-mail: _____

IL 532 2104 WPC 523 Rev 6/10

This Agency is authorized to require this information under Section 4 and Title X of the Environmental Protection Act (415 ILCS 5/4, 5/39). Failure to disclose this information may result in: a civil penalty of not to exceed $50,000 for the violation and an additional civil penalty of not to exceed $10,000 for each day during which the violation continues (415 ILCS 5/42) and may also prevent the form from being processed and could result in your application being denied. This form has been approved by the Forms Management Center.

TYPE OF CONSTRUCTION **(select one)**

Construction Type _____

SIC Code: _____

Type a detailed description of the project:

_____

_____

_____

_____

_____

_____

HISTORIC PRESERVATION AND ENDANGERED SPECIES COMPLIANCE

Has the project been submitted to the following state agencies to satisfy applicable requirements for compliance with Illinois law on:

Historic Preservation Agency ☐ Yes ☐ No

Endangered Species ☐ Yes ☐ No

RECEIVING WATER INFORMATION

Does your storm water discharge directly to: ☐ Waters of the State or ☐ Storm Sewer

Owner of storm sewer system: _____

Name of closest receiving water body to which you discharge: _____

Mail completed form to: Illinois Environmental Protection Agency
Division of Water Pollution Control
Attn: Permit Section
Post Office Box 19276
Springfield, Illinois 62794-9276
or call (217) 782-0610
FAX: (217) 782-9891

Or submit electronically to: epa.constlr10swppp@illinois.gov

I certify under penalty of law that this document and all attachments were prepared under my direction and supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage this system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. In addition, I certify that the provisions of the permit, including the development and implementation of a storm water pollution prevention plan and a monitoring program plan, will be complied with.

Any person who knowingly makes a false, fictitious, or fraudulent material statement, orally or in writing, to the Illinois EPA commits a Class 4 felony. A second or subsequent offense after conviction is a Class 3 felony. (415 ILCS 5/44(h))

_____ Owner Signature: _____ Date:

_____ Printed Name: _____ Title:

INSTRUCTIONS FOR COMPLETION OF CONSTRUCTION ACTIVITY NOTICE OF INTENT (NOI) FORM

Submit original, electronic or facsimile copies. Facsimile and/or electronic copies should be followed-up with submission of an original signature copy as soon as possible. Please write "copy" under the "For Office Use Only" box in the upper right hand corner of the first page.

This fillable form may be completed online, a copy saved locally, printed and signed before it is submitted to the Permit Section at:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Permit Section
Post Office Box 19276
Springfield, Illinois 62794-9276
or call (217) 782-0610
FAX: (217) 782-9891

Or submit electronically to: epa.constlir10swppp@illinois.gov

Reports must be typed or printed legibly and signed.

Any facility that is not presently covered by the General NPDES Permit for Storm Water Discharges From Construction Site Activities is considered a new facility.

If this is a change in your facility information, renewal, etc., please fill in your permit number on the appropriate line; changes of information or permit renewal notifications do not require a fee.

NOTE: FACILITY LOCATION IS NOT NECESSARILY THE FACILITY MAILING ADDRESS, BUT SHOULD DESCRIBE WHERE THE FACILITY IS LOCATED.

Use the formats given in the following examples for correct form completion.

	Example	Format
Section	12	1 or 2 numerical digits
Township	12N	1 or 2 numerical digits followed by "N" or "S"
Range	12W	1 or 2 numerical digits followed by "E" or "W"

For the Name of Closest Receiving Waters, do not use terms such as ditch or channel. For unnamed tributaries, use terms which include at least a named main tributary such as "Unnamed Tributary to Sugar Creek to Sangamon River."

Submission of initial fee and an electronic submission of Storm Water Pollution Prevention Plan (SWPPP) for Initial Permit prior to the Notice of Intent being considered complete for coverage by the ILR10 General Permits. Please make checks payable to: Illinois EPA at the above address.

Construction sites with less than 5 acres of land disturbance - fee is $250.

Construction sites with 5 or more acres of land disturbance - fee is $750.

SWPPP should be submitted electronically to: epa.constlir10swppp@illinois.gov. When submitting electronically, use Project Name and City as indicated on NOI form.

Illinois Environmental Protection Agency

Bureau of Water • 1021 North Grand Avenue East • P.O. Box 19276 • Springfield • Illinois • 62794-9276

Division of Water Pollution Control
NOTICE OF TERMINATION (NOT)
of Coverage under the General Permit for Storm Water Discharges Associated with Construction Site Activities

This fillable form may be completed online, a copy saved locally, printed and signed before it is submitted to the Permit Section at the above address.

Permit No. ILR10 _____

OWNER INFORMATION

Owner Name: _____

Owner Type (select one) _____

Mailing Address: _____ Phone: _____

City: _____ State: ____ Zip: _____ Fax: _____

Contact Person: _____ E-mail: _____

CONTRACTOR INFORMATION

Contractor Name: _____

Mailing Address: _____ Phone: _____

City: _____ State: ____ Zip: _____ Fax: _____

CONSTRUCTION SITE INFORMATION

Facility Name: _____

Street Address: _____

City: _____ IL Zip: _____ County: _____

NPDES Storm Water General Permit Number: ILR10 _____

Latitude: ____ ____ ____ Longitude: ____ ____ ____ ____ ____ ____

(Deg) (Min) (Sec) (Deg) (Min) (Sec) Section Township Range

DATE PROJECT HAS BEEN COMPLETED AND STABILIZED: _____

NOTE: Coverage under this permit cannot be terminated without the completion date.

I certify under penalty of law that disturbed soils at the identified facility have been finally stabilized or that all storm water discharges associated with industrial activity from the identified facility that are authorized by an NPDES general permit have otherwise been eliminated. I understand that by submitting this notice of termination, that I am no longer authorized to discharge storm water associated with industrial activity by the general permit, and that discharging pollutants in storm water associated with industrial activity to Waters of the State is unlawful under the Environmental Protection Act and the Clean Water Act where the discharge is not authorized by an NPDES Permit.

Any person who knowingly makes a false, fictitious, or fraudulent material statement, orally or in writing, to the Illinois EPA commits a Class 4 felony. A second or subsequent offense after conviction is a Class 3 felony. (415 ILCS 5/44(h))

_____ _____

Owner Signature: Date:

Mail completed form to: Illinois Environmental Protection Agency
Division of Water Pollution Control, Attn: Permit Section
1021 North Grand Avenue East
P.O. Box 19276
Springfield, Illinois 62794-9276

(Do not submit additional documentation unless requested)

This Agency is authorized to require this information under Section 4 and Title X of the Environmental Protection Act (415 ILCS 5/4, 5/39). Failure to disclose this information may result in: a civil penalty of not to exceed $50,000 for the violation and an additional civil penalty of not to exceed $10,000 for each day during which the violation continues (415 ILCS 5/42) and may also prevent this form from being processed and could result in your application being denied. This form has been approved by the Forms Management Center.

IL 532 2102
WPC 621 Rev 12/11

GUIDELINES FOR COMPLETION OF NOTICE OF TERMINATION (NOT) FORM

Please adhere to the following guidelines:

Submit original, electronic or facsimile copies. Facsimile and/or electronic copies should be followed-up with submission of an original signature copy as soon as possible.

Submit completed forms to:

Illinois Environmental Protection Agency
Division of Water Pollution Control, Attn: Permit Section
1021 North Grand Avenue East
P.O. Box 19276
Springfield, Illinois 62794-9276
or call (217) 782-0610
FAX: (217) 782-9891

Or submit electronically to: epa.constilr10swppp@illinois.gov

Reports must be typed or printed legibly and signed.

NOTE: FACILITY LOCATION IS NOT NECESSARILY THE FACILITY MAILING ADDRESS, BUT SHOULD DESCRIBE WHERE THE FACILITY IS LOCATED.

Use the formats given in the following examples for correct form completion.

	Example	Format
Section	12	1 or 2 numerical digits
Township	12N	1 or 2 numerical digits followed by "N" or "S"
Range	12W	1 or 2 numerical digits followed by "E" or "W"

Final stabilization has occurred when:

(a) all soil disturbing activities at the site have been completed;

(b) a uniform perennial vegetative cover with a density of 70% of the native background vegetative cover for the area has been established on all unpaved areas not covered by permanent structures; or

(c) equivalent permanent stabilization measures have been employed.

Illinois Environmental Protection Agency

Bureau of Water • 1021 N. Grand Avenue E. • P.O. Box 19276 • Springfield • Illinois • 62794-9276

Division of Water Pollution Control
Construction Site Storm Water Discharge Incidence of Non-Compliance (ION)

This fillable form may be completed online, a copy saved locally, printed and signed before it is submitted to the Compliance Assurance Section at the above address. You may email this completed form to:
epa.swnoncomp@illinois.gov

For Office Use Only
Permit No. ILR10_____

Permittee Information:

Name: _____

Street Address: _____ P.O. Box: _____

City: _____ State: IL Zip Code: _____ County: _____

Phone: _____ Email: _____

Construction Site Information:

Site Name: _____

Street Address: _____

City: _____ State: IL Zip Code: _____

Latitude: ____ (Deg) ____ (Min) ____ (Sec) Longitude: ____ (Deg) ____ (Min) ____ (Sec) ____ Section ____ Township ____ Range

Cause of Non-Compliance

_____

Actions Taken to Prevent Any Further Non-Compliance

_____

Environmental Impact Resulting From the Non-Compliance

_____

Actions Taken to Reduce the Environmental Impact Resulting From the Non-Compliance

_____

Any person who knowingly makes a false, fictitious, or fraudulent material statement, orally or in writing, to the Illinois EPA commits a Class 4 felony. A second or subsequent offense after conviction is a Class 3 felony. (415 ILCS 5/44(h))

Owner Signature: _____ Date: _____

Printed Name: _____ Title: _____

IL 532 2109 WPC
624 Rev. 10/2011

This Agency is authorized to require this information under Section 4 and Title X of the Environmental Protection Act (415 ILCS 5/4, 5/39). Failure to disclose this information may result in: a civil penalty of not to exceed $50,000 for the violation and an additional civil penalty of not to exceed $10,000 for each day during which the violation continues (415 ILCS 5/42) and may also prevent this form from being processed and could result in your application being denied. This form has been approved by the Forms Management Center.

DIVISION OF WATER POLLUTION CONTROL
ILLINOIS ENVIRONMENTAL PROTECTION AGENCY
FIELD OPERATIONS SECTION

GUIDELINES FOR COMPLETION OF INCIDENCE OF NON-COMPLIANCE (ION) FORM

Complete and submit this form for any violation of the Storm Water Pollution Prevention Plan observed during any inspection conducted, including those not required by the SWPPP. Please adhere to the following guidelines:

Initial submission within 24 hours by email, telephone or fax (see region fax numbers) of any incidence of non-compliance for any violation. Submit email copy to: epa.swnoncomp@illinois.gov. After 24 hours notification, submit signed original ION within 5 days to the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Compliance Assurance #19
Post Office Box 19276
Springfield, Illinois 62794-9276

FIELD OPERATIONS HEADQUARTERS
Bruce Yurdin, Manager
Phone: 217/782-3362 Fax: 217/785-1225
EMAIL: epa.swnoncomp@illinois.gov

Region 1 - ROCKFORD
Chuck Corley, Manager
Phone: 815/987-7760 Fax: 815/987-7005

Region 2 - DESPLAINES
Jay Patel, Manager
Phone: 847/294-4000 Fax: 847/294-4058

Region 3 - PEORIA
Jim Kammueller, Manager
Phone: 309/693-5463 Fax: 309/693-5467

Region 4 - CHAMPAIGN
Joe Koronkowski, Manager
Phone: 217/278-5800 Fax: 217/278-5808

Region 5 - SPRINGFIELD
Bruce Yurdin, FOS Manager
Phone: 217/782-3362 Fax: 217/785-1225

Region 6 - COLLINSVILLE
Bruce Yurdin, FOS Manager
Phone: 217/782-3362 Fax: 217/785-1225

Region 7- MARION
Byron Marks, Manager
Phone: 618/993-7200 Fax: 618/997-5467

COOK COUNTY
DEPARTMENT OF HIGHWAYS

Superintendent of Highways

Cook County Administration Building
69 West Washington Street 23rd Floor
Chicago, Illinois 60602-3007
Telephone (312) 603-1600-01/ Fax (312) 603-9945

National Pollutant Discharge Elimination System (NPDES)
Contractor Certification Statement

This certification statement is required as part of the National Pollutant Discharge Elimination System General Permit No. ILR10 issued by the Illinois Environmental Protection Agency and is part of the Storm Water Pollution Prevention Plan / Erosion Control Plan for this project. All Contractors and Subcontractors involved in the implementation of the erosion and sediment control plan must sign a Contractor Certification Statement before conducting any professional service at the site identified in the plan.

Project Information:

Road: **Kedzie Avenue** **and** **139th Street**
Limits: **139th Street to 135th Street** **Kedzie Avenue to Utica Avenue**

Resident Engineer: _____

I certify under penalty of law that I understand the terms of the general National Pollutant Discharge Elimination System (NPDES) permit ILR10 that authorizes the storm water discharges associated with industrial activity from the construction site identified as part of this certification.

_____ _____
Name (PRINT) of Contractor Telephone Number

_____
Signature

_____
Company Name

_____
Street Address

_____
City State Zip

COOK COUNTY
DEPARTMENT OF HIGHWAYS

Superintendent of Highways

Cook County Administration Building
69 West Washington Street 23rd Floor
Chicago, Illinois 60602-3007
Telephone (312) 603-1600-01/ Fax (312) 603-9945

National Pollutant Discharge Elimination System (NPDES)
Soil Erosion and Sediment Control – Inspection Report

Road: **Kedzie Avenue and 139th Street** Section Number: **13-W4612-07-LS**

Limits: **139th Street to 135th Street Kedzie Avenue to Utica Avenue**

Date of Inspection: _____ Type of Inspection: weekly after recent rainfall
Name of Inspector: _____ Time of Inspection: _____

Stage of Construction/Active work at time of inspection:

- ☐ Pre-Construction Plan Review
- ☐ Clearing and Grubbing
- ☐ Rough Grading
- ☐ Finishing Grade
- ☐ Trenching
- ☐ Sewer Installation
- ☐ Paving
- ☐ Final Stabilization
- ☐ Other: _____
- ☐ _____
- ☐ _____
- ☐ _____

All temporary ditch checks have been installed as shown on plans Yes No
Perimeter erosion barrier/silt fence is trenched in place and functioning as indicated on plans Yes No
Silt fence has been placed around all stockpiles Yes No
All storm sewer inlets have inlet protection Yes No
Is sediment tracking from this construction project onto public roadways? Yes No
Are adjacent properties and waterways being adequately protected from construction debris and sediment? Yes No
All temporary soil erosion/sediment control BMPs *that are no longer needed* have been removed Yes No

The Contractor is hereby notified that the following corrective action must be taken:

Location: _____ Type of BMP: Repair must occur by: _____
Describe correction to be made by Contactor: (date/time)

Location: Type of BMP: Repair must occur by:
Describe correction to be made by Contactor : (date/time)

Location: Type of BMP: Repair must occur by:
Describe correction to be made by Contactor: (date/time)

Notification to Contactor given by: _____

Date:_____ Time: _____ Contractor/SubContractor's _____(initial upon receipt)

Erosion and Sediment Control Deficiency Deduction will be imposed per Art. 105.03 of the IDOT Standard Specifications Jan 1 , 2012.
If Contractor fails to meet requirements of ILR10 , an Incidence of Non-Compliance Form will be completed and sent to the IEPA with this repair notice.

COOK COUNTY
DEPARTMENT OF HIGHWAYS

Superintendent of Highways

Cook County Administration Building
69 West Washington Street 23rd Floor
Chicago, Illinois 60602-3007
Telephone (312) 603-1600-01/ Fax (312) 603-9945

National Pollutant Discharge Elimination System (NPDES)
Stormwater Pollution Prevention Plan

This plan has been prepared to comply with the provisions of the National Pollutant Discharge Elimination System (NPDES) ILR10 Permit, issued by the Illinois Environmental Protection Agency for storm water discharges from Construction Site Activities.

I certify that under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signature

10/22/13
Date

Superintendent of Highways
Title

Road Name:	**Kedzie Avenue**	**and**	**139th Street**
Limits:	**139th Street to 135th Street**		**Kedzie Avenue to Utica Avenue**
Section Number:	**13-W4612-07-LS**		
Location:	**Village of Robbins**		
County:	**Cook**		

1. SITE DESCRIPTION

The following is a description of the construction activity which is the subject of this plan:

This project includes construction and installation of parkway enhancements, streetscaping, street lighting, sidewalks, ADA ramps, minor drainage improvements and landscaping along Kedzie Avenue from Station 99+00 to Station 128+00, 139th Street from Station 201+00 to 301+00 and approximately 200 feet west of the centerline of Utica Avenue from Station 310+00 to Station 312+00. No additional right-of-way or easement will be required. The existing 5-lane cross section on Kedzie Avenue and the 2-lane cross section on 139th Street will be maintained.

The following is a description of the intended sequence of major activities which will disturb soils for major portions of the construction site, such as grubbing, excavation, and grading: (To be completed by the Resident Engineer and Contractor.)

The total area of the project is **1.4** (acres).
The total area of the site expected to be disturbed by excavation, grading, or other soil breaking activities is **1.2** (acres).

The estimated runoff coefficients of the various areas of the site after construction activities are completed are contained in the project drainage study which is incorporated by reference into this plan. Information describing the soils at the site, including soil boring logs and soil profiles, is contained in the soils report for the project and is incorporated by reference into this plan.

According to the Soil Survey of Cook County, Illinois, soils present within project limits are

- **Darroch Silt Loam 0 to 2 percent slopes**
- **Urban land**
-
-

The design/project report and plan documents are incorporated by reference and contain site maps, drainage patterns, approximate slopes before and after major grading activities, areas of major soil disturbance, locations of stabilization practices to be implemented during construction, location of all surface waters and wetlands within project limits, and location of storm water outfalls.

The names of receiving water(s) and aerial extent of wetland acreage at the site are also in the project report and plan documents.
Receiving waters: **Calumet Slough\Midlothian Creek**.

The proposed improvements are located within the **Chicago/Calumet** watershed

_____ sub-watershed.

The primary storm water discharge points are as follows:

Sta. 102+00	Description: Outfalls outside of Kedzie Ave. right-of-way through flared end section into creek
Sta. 103+44	Description: Outfalls outside of Kedzie Ave. right-of-way through flared end section into creek
Sta. 104+90	Description: Outfalls outside of Kedzie Ave. right-of-way through flared end section into creek
Sta. 106+40	Description: Outfalls outside of Kedzie Ave. right-of-way through flared end section into creek
Sta. 107+48	Description: Outfalls outside of Kedzie Ave. right-of-way through flared end section into creek

2. CONTROLS

Perimeter Erosion Barrier – A silt fence will be placed adjacent to areas of construction to intercept waterborne silt and prevent it from leaving the site. These areas are indicated on the drainage plans. This control measure will be in place and functioning prior to any ground breaking.

Erosion Control Blanket – Erosion control blanket shall be placed over all disturbed areas that have been brought to final grade if sodding is not installed within 24 hours and at any time and location as deemed necessary by the Resident Engineer to protect slopes from erosion. Erosion Control Blanket with green dye is NOT acceptable.

Stone Rip Rap – Stone riprap will be maintained around the box culvert, pipe culvert, embankment near STA. n/a _____ to protect against scour and prevent erosion.

Temporary Ditch Checks – Rolled excelsior or urethane/foam ditch checks may be used as directed by the Resident Engineer. Silt fence (statewide) and straw bales (District #1) are not allowed as temporary ditch checks.

Temporary Tree Protection – Shall consist of temporary fencing and tree trunk protection as directed by the Resident Engineer in accordance with Article 201.05 of the IDOT Standard Specifications for Road and Bridge Construction.

Sodding (for residential areas) – Sodding shall be used to stabilize all disturbed parkway areas within 24 hours of final grading unless otherwise noted on plans. If sodding is not in place within 24 hrs of final grading, erosion control blanket is to be used to protect exposed soils until sodding is installed.

Permanent Seeding (for non-residential areas) - Seeding, Class 2A shall be used to stabilize all disturbed parkway areas within 24 hours of final grading unless otherwise noted on plans. Erosion control blanket is to be installed over seeded areas. Biodegradable, lightweight erosion control blanket is preferred. ECB containing green dye is not acceptable.

Inlet Pipe Protection –Inlet pipe protection shall be provided for those structures in the parkway as shown in the plans. Drainage structure inlet filters will be placed and maintained at those locations indicated on the drainage plans and as directed by the Engineer.

Diversion of Stream flow – Throughout culvert or bridge installation, the Contractor shall maintain the flows by using a diversion channel and/or by-pass piping/pumping to divert flows through or around the work area (see Special Provision for Maintaining Drainage and Stream Protection). If a diversion channel is used, the channel walls and bed shall be protected from soil erosion by use of erosion control blanket, plastic sheeting, or by a method approved by the Engineer. When operating under permit, the authorizing Soil and Water Conservation District must also approve the method of diversion.

Isolation of Work Area - Prior to culvert or bridge installation, the Contractor shall isolate the work area from flowing water through the use of cofferdams. The system must be approved by the Engineer and by the authorizing Soil and Water Conservation District (see Special Provision for Maintaining Drainage and Stream Protection).

Dewatering Operations - The Contractor shall use a sump pit for dewatering the isolated work area. Water from the sump pit shall be discharged to a sediment basin or sediment bag of adequate size to provide for settlement prior to being discharged to the drainage system. The discharge of water from dewatering operations directly into the stream or drainage system is strictly prohibited. (see Special Provision for Maintaining Drainage and Stream Protection).

The Contractor shall initiate stabilization measures as soon as practicable on portions of the site where construction activities have ceased (permanently or temporarily) and at any time and location deemed necessary and as directed in writing by the Engineer.

The Contractor shall provide and install stabilization measures (permanently or temporarily) as needed prior to the cessation of work at the end of the construction season which will provide adequate protection until work is resumed. The Contractor shall maintain these measures throughout the dormant period.

Contractor: _____
Print name and initial

Other Controls

Waste Disposal – No solid materials, including building materials, shall be discharged into waters of the state, except as authorized by a Section 404 permit.

The provisions of this plan shall ensure and demonstrate compliance with applicable State and/or local waste disposal, sanitary sewer or septic system regulations.

Approved State or Local Plans

The management practices, controls, and provisions contained in this plan will be in accordance with IDOT Standard Specifications for Road and Bridge Construction (2002) and the IEPA Illinois Urban Manual (1995).

MAINTENANCE

The following is a description of procedures that will be used to maintain, in good and effective operating conditions, vegetation, erosion and sediment control measures and other protective measures identified in this plan.

During construction the Contractor shall:

Clean up and grade the work area to eliminate concentration of runoff.
Cover the open ends of pipes in trenches at the close of each workday.
Maintain or replace erosion and sediment control items.

Prior to any landscaping/restoration work, the Contractor shall:

Remove and dispose of silt retained by the temporary ditch checks as directed by the resident engineer.
Reinstall temporary ditch checks after cleaning.

All maintenance of erosion control systems will be the responsibility of the Contractor. All locations where vehicles enter and exit the construction site and all other areas subject to erosion should be inspected at least once every seven days and within 24 hours or the end of each ½ in. or greater rainfall event, or an equivalent snowfall (5 in.).

Inspection procedures shall be followed as outlined below.

INSPECTIONS

Qualified personnel shall inspect disturbed areas of the construction site which have not been fully stabilized, structural control measures, and locations where vehicles enter or exit the site. Such inspections shall be conducted at least once every seven (7) calendar days and within 24 hours of the end of a storm that is ½ in. or greater rainfall or equivalent snowfall (5 in.).

Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the plan shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Locations where vehicles enter or exit the site shall be inspected for evidence of offsite sediment tracking.

Based on the results of the inspection, the description of potential pollutant sources identified in section a) above and pollution prevention measures identified in section a) above shall be revised as appropriate as soon as practicable after such inspection. Any changes to this plan resulting from the required inspections shall be implemented within 24 hours following the inspection (a mark-up plan showing accurate locations and types of BMPs used must be kept.)

A report summarizing the scope of the inspection, name(s) and qualifications of personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of this storm water pollution plan, and actions taken in accordance with section b) shall be made and retained as part of the plan for at least three (3) years after the date of the inspection. The report shall be signed in accordance with Part VI G of the general permit.

If any violation of the provisions of this plan is identified during the conduct of the construction work covered by this plan, the Resident Engineer or Resident Technician shall complete and file an "Incidence of Noncompliance" (ION) report for the identified violation. The Resident Engineer or Resident Technician shall use forms provided by the Illinois Environmental Protection Agency and shall include specific information on the cause of non-compliance, actions which were taken to prevent any further causes of non-compliance, and a statement detailing any environmental impact which may have resulted from the non-compliance. All reports of noncompliance shall be signed by a responsible authority in accordance with Part VI. G of the general permit. The report of non-compliance shall be mailed to the following address:

Illinois Environmental Pollution Agency
Division of Water Pollution Control
Attn: Compliance Assurance Section
1021 North Grand East
Post Office Box 19276
Springfield, IL 62794-9276

NON-STORM WATER DISCHARGES

Except for flows from fire fighting activities, sources of non-storm water that is combined with storm water discharges associated with the industrial activity addressed in the plans are described below. Appropriate pollution prevention measures, as described below, will be implemented for the non-storm water component(s) of the discharge.

The only source of non-storm water discharge within the project limits will be from watering of seeding or for erosion control and landscaping purposes.

EVIDENCE OF COMPLIANCE WITH OTHER LAWS

Endangered Species Act

As part of the Biological Resource Review for the project, an evaluation of habitat for federally listed endangered and threatened species was conducted by the U.S. Fish and Wildlife Service. No suitable habitat for species listed as occurring in Cook County was found to be present.

National Historic Properties Act of 1966

A cultural resource review was made for this project as part of the planning process. It included research and documentation concerning historical and archeological resources and sites, and a field archeological survey. The project received concurrence from the Illinois State Historic Preservation Officer that no historic properties subject to protection under Section 106 of the National Historic Preservation Act of 1966, as amended, will be affected by the proposed construction activities.

State Endangered and Threatened Species

The IL Department of Natural Resources participated in the Biological Resources Review encompassing the entire improvement and requested coordination with the Cook County Department of Transportation and Highways due to potential impacts to:

_____
(description of impacted resource)

This area is located: _____
(location in reference to the project plans)

Early coordination was completed with all necessary clearance received from the IDNR on: _____
(clearance letter date here)

EVIDENCE OF COMPLIANCE WITH OTHER LAWS

Clean Water Act: Wetlands and Waters of the U.S.

This project is operating under Section 404 of the Clean Water Act General Permit Application #_____as approved by the US Army Corps of Engineers on _____

This project shall comply with the water quality certification issued under Section 401 of the Clean Water Act by the IL Environmental Protection Agency.

If the project will impact 0.10 acre or more of wetlands, mitigation of 1.5:1 is required under federal regulations.

Wetland Impacts _____acres

Mitigation Provided _____acres / Location: _____

References

Standard Specifications for Road and Bridge Construction, Illinois Department of Transportation, January 1, 2012
Illinois Urban Manual, United States Department of Agriculture – Natural Resources Conservation Service, September 1995
"*National Pollutant Discharge Elimination System (NPDES) Storm Water Permit General Permit for Construction Site Activities No. ILR10*", Illinois Environmental Protection Agency – Division of Water Pollution Control.

SPECIAL PROVISION
FOR
SODDING

This Special Provision amends the provisions of the Standard Specifications and shall be construed to be a part thereof.

252.09 Supplemental Watering. Revise the third sentence to read:

When the supplemental watering is specified on the plans, the water shall be applied at the total rate of 10 gallons per square yard (45 liters per square meter) within 24 hours of notice.

252.11 Inspection. Revise the first paragraph to read:

The Contractor shall notify the Cook County Department of Transportation and Highways of the localities from which the sod is to be obtained so that an authorized representative of the Transportation and Highways Department can inspect the field for approval. All sod shall be fresh and green when delivered. Any sod that is dried out, burned, brown or inferior in quality to the approved sod field, or in any way fails to meet the requirements of the specifications, will be rejected and removed from the job immediately and shall be replaced with suitable sod at the Contractor's expense.

To insure the delivery of suitable field sod, three weeks before cutting, the Contractor or the Supplier shall apply sufficient weed killer to eradicate existing common weeds. Seven days after the weed killer is applied, sufficient fertilizer shall be spread over the field to insure green sod prior to any delivery.

Only 2 year growing season or older approved nursery grown sod shall be placed on parkways and median strips adjacent to residential property, parks or other special areas as designated by the Engineer.

SPECIAL PROVISION
FOR
TREES TO BE PLANTED

A quantity for Trees to be Planted has been included in the Summary of Quantities to provide for the planting of trees within the project limits. All planting of trees will be done per the applicable special provisions and sections of the Standard Specifications for Road and Bridge Construction or to other standards and details as included in these plans and special provisions, including seasonal restrictions and warranties.

Specific locations for planting will be determined by the Engineer. Local agencies may be consulted to determine tree species and locations. However, this consultation does not necessarily constitute agreement for maintenance of the plantings by the local agency. The Engineer may determine that it is not possible to feasibly locate the entire contract quantity for Trees to be Planted within the project limits. In this case, less than the contract quantity will be planted and no extra compensation will be allowed to the Contractor.

The following tree species are typical of what will be allowed for planting. Species not listed below may be chosen at the direction of the Engineer. However, it is the intent of this contract to utilize species common to parkway plantings. In all cases, specific species and locations will be determined by the Engineer. All trees to be nursery stock, selected and tagged by the Engineer, 21/2" B-B.

In areas without overhead wires:

Acer nigrum — Black Maple
Fraxinus americana — Windy City White Ash
Quercus bicolor — Swamp White Oak
Tilia americana "Redmond" — Redmond Linden
Ulmus hybrids — Elm Hybrids including Homestead, Morton and Pioneer
Gleditsia triacanthos inermis — Thornless Honey Locust

In areas with overhead wires:

Acer campestre — Hedge Maple*
Corpus Mas — Cornelian Cherry Dogwood*
Malus — Crabapple cultivars including Adams, Beverly, Prairiefire and Red Jewel*
Ostrya virginiana — Ironwood*

* All Tree Form

Basis of Payment. All trees will be paid for as Each,Trees, of the Specified Species

SPECIAL PROVISION
FOR
PLANTING WOODY PLANTS

This special provision amends the provisions of the standard specifications and shall be construed to be a part thereof.

253.03 Planting Time. Add the following after the first paragraph:

All planting work shall be suspended during inclement weather judged to be detrimental to the plant material by the engineer. Sunday work shall not be performed without the permission of the engineer. Any planting done without permission of the engineer due to the weather or on sundays will be subject to removal and shall be replanted with new material of the same number, size and variety at the contractor's own expense.

253.05 Transportation. Revise the second sentence of the paragraph to read:

Upon arrival at the temporary storage location or the site of the work and before planting backfill operations have begun, plants will be inspected for proper shipping procedures as defined in article 1081.01(d).

253.08 Excavation of Plant Holes. Revise the third and fourth sentences of the first paragraph to read:

Under no circumstances shall surplus excavated material be stockpiled in ditches, on shoulders, or on sodded areas. All work shall cease until this material is removed off the site of the work. All damage incurred from this operation shall be replaced or repaired at the contractor's expense.

253.08 (b) Excavation for Shrubs, Vines and Seedlings. Add the following to the second paragraph:

When shrub beds are located on existing sod areas, the sod shall be stripped from the entire shrub bed prior to the digging of shrub holes. The Engineer shall make on site inspection of shrub bed sites before excavation begins. The final bed grade shall be at the direction of the engineer. All surplus excavated material from the shrub holes shall be removed from the bed and disposed of by the contractor off the site of the work.

253.10 Planting Procedures. Revise first and second sentences of the first paragraph to read:

The prepared backfill shall consist of topsoil as approved by the Engineer. Soil removed from the hole shall be used to construct the water saucer as directed by the Engineer.

253.12 Wrapping. Add the following after the first paragraph:

Use screen wrapping as specified or use alternate, tree wrapping paper, as directed by the engineer.

253.13 Bracing. Revise the first sentence of the first paragraph to read:

No bracing shall be required for small or intermediate trees, 1.2M (4 feet) thru 2.5M (8 feet) in height. Trees larger than 50MM (2 inches) in diameter and smaller than 75MM (3 inches) in diameter, shall require 2

posts, so placed that a line between them will be parallel to the roadway. Trees more than 75MM (3 inches) in diameter require 3 posts so placed that they are equidistant from each other.

253.14 Period of Establishment. Add the following after the first paragraph:

Besides the required replacement of dead and unsatisfactory plants, all plants that have been over-pruned, resulting in an unnatural shape, and those which show more than a 40% loss of leaves after the period of establishment, shall be replaced. Any plant material stolen from the site of the work, burned or damaged during the life of the contract shall be replaced in number, size and variety at the contractor's expense.

253.14 Period of Establishment. Add the following after the fourth paragraph:

Contractor's responsibility shall be limited to one replacement if original planting fails to survive.

253.15 Plant Care (b). Add the following after the second paragraph:

All sodded or seeded areas, medians, parkways and shoulder areas damaged by deep rutting or displacement due to equipment used in planting or care of plants shall be restored at the contractor's expense.

1081.01 (c) Inspection of Plant Material. Revise the last sentence of part (1) to read:

A representative of the Architecture and Landscape Section shall place identification seals on all large and small trees. A representative number of shrubs, vines and seedlings (10 per 1,000) shall be sealed or tagged.

SPECIAL PROVISION
FOR
WORK ZONE TRAFFIC CONTROL SURVEILLANCE

Revise Article 701.10 of the Standard Specifications to read:

"The Contractor shall conduct inspections of the worksite at a frequency that will allow for the timely replacement of any traffic control device that has become displaced, worn, or damaged. A sufficient quantity of replacement devices, based on vulnerability to damage, shall be readily available to meet this requirement."

Delete Articles 701.19(d) and Article 701.20(g) of the Standard Specifications.

MODIFIED URETHANE PAVEMENT MARKING (BDE)

Effective: April 1, 2012

Add the following to Article 780.02 of the Standard Specifications:

"(h) Modified Urethane Pavement Marking ..... 1095.09"

Add the following to Article 780.03 of the Standard Specifications:

"(e) Modified Urethane ..... 1105.04"

Revise Article 780.11 of the Standard Specifications to read:

"**780.11 Modified Urethane.** The pavement shall be cleaned of all dirt, grease, glaze, or any other material that would reduce the adhesion of the markings with minimum or no damage to the pavement. New PCC pavements shall be blast-cleaned to remove all curing compounds. New asphalt and seal coated shall be in place a minimum of two weeks prior to marking applications.

Markings shall be applied on the same calendar day that the pavement surface is cleaned. If this cannot be accomplished, the surface shall be re-cleaned prior to applying the markings. Existing pavement markings shall be at least 90 percent removed. No markings shall be applied until the Engineer approves the cleaning.

Widths, lengths, and shapes of the cleaned surface shall be prepared wider than the modified urethane pavement marking material to be applied, such that a prepared area is on all sides of the urethane pavement marking material after application.

The Contractor shall notify the Engineer 72 hours prior to the placement of the markings in order than an inspector can be present during the operation. At the time of this notification, the Contractor shall indicate the manufacturer and lot numbers of urethane and reflective media that will be used. The Engineer will ensure that the approved lot numbers appear on the material package.

The pavement markings shall be applied during conditions of dry weather and subsequently dry pavement surfaces at a minimum uniform wet thickness of 25 mils (0.64 mm) according to the manufacturer's installation instructions. The application and combination of reflective media (glass beads and/or reflective elements) shall be applied at a rate specified by the manufacturer. At the time of installation the pavement surface temperature shall be 40 °F (5 °C) and rising and the ambient temperature shall be 35 °F (2 °C) and rising. The pavement surface temperature and the ambient temperatures shall be determined and documented before the start of each of marking operation. The pavement markings shall not be applied if the pavement shows any visible signs of moisture or it is anticipated that moisture, such as rain showers, may occur during the installation and curing periods."

Revise Article 780.12 of the Standard Specifications to read:

"**780.12 Inspection.** The epoxy, thermoplastic, preformed thermoplastic, preformed plastic Type B or C, polyurea, and modified urethane pavement markings will be inspected following installation, but no later than October 15 for preformed plastic markings, November 1 for thermoplastic and preformed thermoplastic markings, and December 15 for epoxy, polyurea, and modified urethane markings. In addition, they will be inspected following a winter performance period that extends 180 days from November 1.

Within 15 calendar days after the end of the winter performance period, a final performance inspection will be made. Final acceptance requirements are as follows.

(a) Lane lines: 90 percent intact by area of each individual dashed line segment.

(b) Crosswalks, stop lines, arrows, and words: 90 percent intact by area of each individual line, symbol, or letter.

(c) Center lines, edge lines, gore markings, and channelizing lines: 90 percent intact by area measured over any 10 ft (3 m) length of any individual line regardless of width.

(d) Entire project: measured in its entirety according to (a), (b), and (c) above, the entire project shall be 95 percent intact.

Upon completion of the final performance inspection, or after satisfactory completion of any necessary correction, the Engineer will notify the Contractor, in writing, of the date of such final performance inspection and release him/her from further performance responsibility.

If this inspection discloses any work, in whole or in part, which does not meet the inspection requirements, the Contractor shall, within 30 calendar days, completely repair or replace such work to the satisfaction of the Engineer.

This performance inspection and performance acceptance of the epoxy, thermoplastic, preformed thermoplastic, preformed plastic Type B and C pavement, polyurea, and modified urethane markings shall not delay acceptance of the entire project and final payment due if the Contractor requires and receives from the subcontractor a third party "performance" bond naming the Department as obligee in the full amount of all pavement marking quantities listed in the contract, multiplied by the contract unit price. The bond shall be executed prior to acceptance and final payment of the non-pavement marking items and shall be in full force and effect until final performance inspection and performance acceptance of the epoxy, thermoplastic, preformed thermoplastic, preformed plastic, polyurea, and modified urethane pavement markings. Execution of the third party bond shall be the option of the Contractor."

Revise Article 780.13 of the Standard Specifications to read:

"**780.13 Method of Measurement.** This work will be measured for payment as follows.

(a) Contract Quantities. The requirements for the use of contract quantities shall be according to Article 202.07(a).

(b) Measured Quantities. Lines will be measured for payment in place in feet (meters). Double yellow lines will be measured as two separate lines.

Words and symbols shall conform to the sizes and dimensions specified in the Illinois Manual on Uniform Traffic Control Devices and Standard 780001 and will be measured based on the total areas indicated in Table 1 or as specified in the plans.

Removal of existing pavement markings will be measured for payment according to Article 783.05."

Add the following to Section 780 of the Standard Specifications:

"**780.14 Basis of Payment.** This work will be paid for at the contract unit prices per foot (meter) of applied line width, as specified, for THERMOPLASTIC PAVEMENT MARKING - LINE; PAINT PAVEMENT MARKING - LINE; EPOXY PAVEMENT MARKING - LINE; PREFORMED PLASTIC PAVEMENT MARKING - LINE - TYPE B, C, or B - INLAID; PREFORMED THERMOPLASTIC PAVEMENT MARKING – LINE; POLYUREA PAVEMENT MARKING TYPE I – LINE; POLYUREA PAVEMENT MARKING TYPE II - LINE; MODIFIED URETHANE PAVEMENT MARKING – LINE; and/or per square foot (square meter) for THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS; PAINT PAVEMENT MARKING - LETTERS AND SYMBOLS; EPOXY PAVEMENT MARKING - LETTERS AND SYMBOLS; PREFORMED PLASTIC PAVEMENT MARKING - TYPE B, C, or B - INLAID - LETTERS AND SYMBOLS; PREFORMED THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS; MODIFIED URETHANE PAVEMENT MARKING – LETTERS AND SYMBOLS.

When the Contractor has the option of applying Permanent Pavement Marking it shall be Thermoplastic, Preformed Plastic (Type B, C, or B - Inlaid), Epoxy, Preformed Thermoplastic, Polyurea, or Modified Urethane Pavement Markings. It will be paid for at the contract unit price per foot (meter) of applied line for PERMANENT PAVEMENT MARKING - LINE 4 (100), 5 (125), 6 (150), 8 (200), 12 (300), 16 (400), or 24 in. (600 mm) and per square foot (square meter) for PERMANENT PAVEMENT MARKING - LETTERS AND SYMBOLS.

Temporary pavement markings placed in lieu of permanent will be paid for according to Article 703.07.

Removal of existing pavement markings will be paid for according to Article 783.06.

*TABLE 1

LETTERS
sq ft (sq m)

Size	A	B	C	D	E	F	G	H	I
6 ft (1.8 m)	3.1 (0.28)	4.0 (0.37)	2.7 (0.25)	3.4 (0.31)	3.3 (0.31)	2.6 (0.24)	3.3 (0.31)	3.4 (0.31)	1.5 (0.14)
8 ft (2.4 m)	5.5 (0.51)	7.1 (0.66)	4.8 (0.45)	6.1 (0.57)	5.9 (0.55)	4.7 (0.44)	5.8 (0.54)	6.0 (0.56)	2.6 (0.24)

Size	J	K	L	M	N	O	P	Q	R
6 ft (1.8 m)	2.1 (0.2)	3.1 (0.28)	2.2 (0.20)	4.2 (0.39)	4.0 (0.37)	3.4 (0.31)	3.0 (0.28)	3.6 (0.33)	3.6 (0.33)
8 ft (2.4 m)	3.7 (0.34)	5.7 (0.53)	3.8 (0.45)	7.4 (0.69)	7.1 (0.65)	6.0 (0.56)	5.3 (0.49)	6.3 (0.59)	6.3 (0.59)

Size	S	T	U	V	W	X	Y	Z
6 ft (1.8 m)	3.2 (0.30)	2.2 (0.20)	3.2 (0.30)	2.7 (0.25)	4.2 (0.39)	2.7 (0.25)	2.2 (0.20)	2.9 (0.26)
8 ft (2.4 m)	5.7 (0.53)	3.8 (0.35)	5.6 (0.52)	4.8 (0.45)	7.3 (0.68)	4.8 (0.45)	3.9 (0.36)	5.1 (0.47)

NUMBERS
sq ft (sq m)

Size	1	2	3	4	5
6 ft (1.8 m)	1.5 (0.14)	3.3 (0.31)	3.3 (0.31)	2.9 (0.26)	3.5 (0.33)
8 ft (2.4 m)	2.6 (0.24)	5.8 (0.54)	5.8 (0.54)	5.1 (0.47)	6.1 (0.57)

Size	6	7	8	9	0
6 ft (1.8 m)	3.5 (0.33)	2.2 (0.20)	3.8 (0.35)	3.5 (0.33)	3.4 (0.31)
8 ft (2.4 m)	6.2 (0.58)	3.8 (0.35)	6.7 (0.62)	6.2 (0.58)	6.0 (0.56)

SYMBOLS

Symbol	Large Size sq ft (sq m)	Small Size sq ft (sq m)
Through Arrow	11.5 (1.07)	6.5 (0.60)
Left or Right Arrow	15.6 (1.47)	8.8 (0.82)
2 Arrow Combination Left (or Right) and	26.0 (2.42)	14.7 (1.37)

Through		
3 Arrow Combination Left, Right, and Through	38.4 (3.56)	20.9 (1.94)
Lane Drop Arrow	41.5 (3.86)	--
Wrong Way Arrow	24.3 (2.26)	--
Railroad "R" 6 ft (1.8 m)	3.6 (0.33)	--
Railroad "X" 20 ft (6.1 m)	54.0 (5.02)	--
Handicapped Symbol	4.6 (0.43)	--

*Table applies to all types of pavement marking materials."

Add the following Section to Section 1095 of the Standard Specifications:

"**1095.09 Modified Urethane Pavement Marking.** The modified urethane pavement marking material shall consist of a homogenous blend of modified urethane resins and pigments designed to provide a simple volumetric mixing ratio of two components (must be two volumes of Part A to one volume of Part B). No volatile solvent or fillers will be allowed.

(a) Pigmentation. The pigment content by weight (mass) of Part A shall be determined by low temperature ashing according to ASTM D 3723. The pigment content shall not vary more than ± two percent from the pigment content of the original qualified paint.

White pigment shall be Titanium Dioxide meeting ASTM D 476 Type II, Rutile.

Yellow pigment shall be Organic Yellow containing no heavy metals.

(b) Environmental. Upon heating to application temperature, the material shall not exude fumes which are toxic or injurious persons or property when handled according to manufacturer specifications. The modified urethane pavement marking material compositions shall not contain free isocyanate functionality.

(c) Daylight Reflectance. The daylight directional reflectance of the cured modified urethane material (without reflective media) shall be a minimum of 80 percent (white) and 50 percent (yellow) relative to magnesium oxide when tested using a color spectrophotometer with a 45 degree circumferential / zero degrees geometry, illuminant C, and two degrees observer angle. The color instrument shall measure the visible spectrum from 380 to 720 nm with a wavelength measurement interval and spectral bandpass of 10 nm. In addition, the color of the yellow modified urethane shall visually match Color Number 33538 of Federal Standard 595a with chromaticity limits as follows:

x	0.490	0.475	0.485	0.539
y	0.470	0.438	0.425	0.456

(d) Weathering Resistance. The modified urethane, when mixed in the proper ratio and applied at 14 to 16 mils (0.35 to 0.41 mm) wet film thickness to an aluminum alloy panel (Federal Test Std. No. 141, Method 2013) and allowed to cure for 72 hours at room temperature, shall be subjected to accelerated weathering for 75 hours. The accelerated weathering shall be completed by using the light and water exposure apparatus (fluorescent UV – condensation type) and tested according to ASTM G 53.

The cycle shall consist of four hours UV exposure at 122 °F (50 °C) and four hours of condensation at 104 °F (40 °C). UVB 313 bulbs shall be used. At the end of the exposure period, the material shall show no substantial change in color or gloss.

(e) Drying Time. The modified urethane material, when mixed in the proper ratio and applied at 14 to 16 mils (0.35 to 0.41 mm) wet film thickness and with the proper saturation of glass beads, shall exhibit a no-tracking time of four minutes or less when tested according to ASTM D 711.

(f) Adhesion. The catalyzed modified urethane pavement marking materials when applied to a 4 x 4 x 2 in. (100 x 100 x 50 mm) concrete block shall have a degree of adhesion which results in a 100 percent concrete failure in the performance of this test.

The concrete block shall be brushed on one side and have a minimum strength of 3,500 psi (24,100 kPa). A 2 in. (50 mm) square film of the mixed modified urethane shall be applied to the brushed surface and allowed to cure for 72 hours at room temperature. A 2 in. (50 mm) cube shall be affixed to the surface of the modified urethane by means of an epoxy glue. After the glue has cured for 24 hours, the modified urethane specimen shall be placed on a dynamic testing machine in such a fashion so that the specimen block is in a fixed position and the 2 in. (50 mm) cube (glued to the modified urethane surface) is attached to the dynamometer head. Direct upward pressure shall be slowly applied until the modified urethane system fails. The location of the break and the amount of concrete failure shall be recorded.

(g) Hardness. The modified urethane marking materials, when tested according to ASTM D 2240, shall have a Shore D Hardness greater than 75. Films shall be cast on a rigid substrate at 14 to 16 mils (0.35 to 0.41 mm) in thickness and allowed to cure at room temperature for 72 hours before testing.

(h) Abrasion. The abrasion resistance shall be evaluated according to ASTM D 4060 using a Taber Abrader with a 1,000 gram load and CS 17 wheels. The duration of test shall be 1,000 cycles. The loss shall be calculated by difference and be less than 80. The tests shall be run on cured samples of modified urethane material which have been applied at a film thickness of 14 to 16 mils (0.35 to 0.41) to code S-16 stainless steel plates. The films shall be allowed to cure at room temperature for at least 72 hours and not more than 96 hours before testing.

(i) Tensile. When tested according to ASTM D 638, the modified urethane pavement marking materials shall have an average tensile strength of not less than 6000 psi

(41,300 kPa). The Type IV specimens shall be pulled at a rate of 1/4 in. (6.3 mm) per minute by a suitable dynamic testing machine. The samples shall be allowed to cure at 75 °F ± 2 °F (24 °C ± 1 °C) for a minimum of 24 hours and a maximum of 72 hours prior to performing the indicated tests.

(j) Compressive Strength. When tested according to ASTM D 695, the catalyzed modified urethane pavement marking materials shall have a compressive strength of not less than 12,000 psi (83,000 kPa). The cast sample shall be conditioned at 75 °F ± 2 °F (24 °C ± 1 °C) for a minimum of 72 hours before performing the indicated tests. The rate of compression of these samples shall be no more than 1/4 in. (6.3 mm) per minute.

(k) Glass Beads. The glass beads shall meet the requirements of Article 1095.04(m) and Article 1095.07 for first drop and second drop glass beads.

(l) Packaging. The material shall be shipped to the jobsite in substantial containers and shall be plainly marked with the manufacturer's name and address, the name and color of the material, date of manufacture and batch number.

(m) Verification. Prior to approval and use of the modified urethane pavement marking materials, the manufacturer shall submit a notarized certification of an independent laboratory, together with the results of all tests, stating these materials meet the requirements as set forth herein. The certification test report shall state the lot tested, manufacturer's name, brand name of modified urethane and date of manufacture. The certification shall be accompanied by 1 pt (1/2 L) samples each of Part A and Part B. Samples shall be sent in the appropriate volumes for complete mixing of Part A and Part B.

After approval by the Department, certification by the modified urethane manufacturer shall be submitted for each batch used. New independent laboratory certified test results and samples for testing by the Department shall be submitted any time the manufacturing process or paint formulation is changed.

(n) Acceptance samples. Acceptance samples shall consist of 1 pt (1/2 L) samples of Part A and Part B, of each lot of paint. Samples shall be sent in the appropriate volumes for complete mixing of Part A and Part B. The samples shall be submitted to the Department for testing, together with a manufacturer's certification. The certification shall state the formulation for the lot represented is essentially identical to that used for qualification testing. All, acceptance samples will be taken by a representative of the Illinois Department of Transportation. The modified urethane pavement marking materials shall not be used until tests are completed and they have met the requirements as set forth herein.

(o) Material Retainage. The manufacturer shall retain the test sample for a minimum of 18 months."

Add the following to Section 1105 of the Standard Specifications:

"**1105.04 Modified Urethane.** The modified urethane pavement marking compounds shall be applied through equipment specifically designed to precisely meter the two components in the ratio of 2:1 and approved by the manufacturer of the material. The equipment shall produce the required amount of heat at the mixing head and gun tip and maintain those temperatures within the tolerances specified. The equipment shall also have as an integral part of the gun carriage, a high pressure air spray capable of cleaning the pavement immediately prior to the marking application.

The equipment shall be capable of spraying both yellow and white modified urethane, according to the manufacturer's recommended proportions and be mounted on a truck of sufficient size and stability with an adequate power source to produce lines of uniform dimensions and prevent application failure. The truck shall have at least two urethane tanks each of 110 gal (415 L) minimum capacity and shall be equipped with hydraulic systems. It shall be capable of placing stripes on the left and right sides and placing two lines on a three-line system simultaneously with either line in a solid or intermittent pattern, in yellow or white, and applying glass beads by the double drop pressurized bead system. The system shall apply both the first drop glass beads and the second drop glass beads at a rate of 1.2 kg/L (10 lb/gal). The equipment shall be equipped with pressure gauges for each proportioning pump. All guns shall be in full view of operators at all times. The equipment shall have a metering device to register the accumulated installed quantities for each gun, each day. Each vehicle shall include at least one operator who shall be a technical expert in equipment operations and urethane application techniques. Certification of equipment shall be provided at the preconstruction conference."

80297

SPECIAL PROVISION
FOR
TRAFFIC PROTECTION

General. This item of work shall include furnishing, installing, maintaining, replacing, relocating and removing all traffic control devices used for the purpose of regulating, warning or directing traffic and protecting workers during the construction or maintenance of this improvement.

Traffic protection shall be provided as called for in the plans, these Special Provisions, applicable Traffic Control Highway Standards, applicable sections of the Standard Specifications, or as directed by the Engineer.

The governing factor in the execution and staging of work for this project is to provide the motoring public with the safest possible travel conditions along the roadway through or around the construction zone. The Contractor shall arrange his operations to keep the closing of any lane of the roadway to a minimum. Where the traffic of any building in the area of the proposed improvement is of an emergency nature, such as Hospital, Fire or Police Station traffic, the Contractor shall provide for free movement of such traffic during the course of construction.

Traffic Control Devices include signs and their supports, signals, pavement markings and markers, traffic cones, barricades with sand bags, plastic drums, channelizing devices, warning lights, arrow boards, flaggers, or any other device used for the purpose of regulating, detouring, warning or guiding traffic through or around the construction zone, including required devices and marking approaching and departing the construction zone.

The Contractor is required to conduct routine inspections of the worksite at a frequency that will allow for the prompt replacement of any traffic control device that has become displaced, worn or damaged to the extent that it no longer conforms to the shape, dimensions, color and operational requirements of the "Manual on Uniform Traffic Control Devices for Streets and Highways (MUTCD), the Traffic Control Standards and the "Quality Standard for Work Zone Traffic Control Devices" issued by the Illinois Department of Transportation or will no longer present a neat appearance to motorists. A sufficient quantity of replacement devices, based on vulnerability to damage, shall be readily available to meet this requirement.

The Contractor shall be responsible for the proper location, installation and arrangement of all traffic control devices. Special attention shall be given to advance warning signs during construction operations in order to keep lane assignment consistent with barricade placement at all times. The Contractor shall immediately remove, cover or turn from the view of the motorists all traffic control devices which are inconsistent with detour or lane assignment patterns and conflicting conditions during the transition from one construction stage to another. When the Contractor elects to cover conflicting or inappropriate signing, materials used shall totally block out reflectivity of the sign and shall cover the entire sign. The method used for covering the signing shall meet with the approval of the Engineer.

The Contractor shall coordinate all traffic control work on this project with adjoining or overlapping projects, including barricade placement necessary to provide a uniform traffic detour pattern. When directed by the Engineer, the Contractor shall remove all traffic control devices which were furnished, installed and maintained by him under this contract, and such devices shall remain the property of the Contractor. All

traffic control devices shall remain in place until specific authorization for relocation or removal is received from the Engineer.

The Contractor shall ensure that all traffic control devices installed by him are functional and effective 24 hours each day.

107.15 Dirt on Pavement or Structures. Add the following after the first paragraph of this Article:

When ordered by the Engineer, the Contractor shall use some method to allay dust and prevent a nuisance. This shall be done preferably by sprinkling the Subgrade or the portion of pavement used by trucks or busses with water. If conditions warrant, this shall receive constant attention by the Contractor. Calcium Chloride shall not be used for this purpose. No extra compensation shall be allowed the Contractor for this work.

Signs. All signs except those referring to daily lane closures shall be post mounted in accordance with Standard 701901 for all projects that exceed four days.

Construction signs referring to daytime lane closures during working hours shall be removed, covered or turned away from the view of the motorists during non-working hours.

Prior to the beginning of construction operations, the Contractor will be provided a sign log of all existing signs within the limits of the construction zone. The Contractor is responsible for verifying the accuracy of the sign log. Throughout the duration of this project, all existing traffic signs shall be maintained by the Contractor. All provisions of Article 107.25 of the Standard Specifications shall apply except the third paragraph shall be revised to read: "The Contractor shall maintain, furnish and replace at his own expense, any traffic sign, or post which has been damaged or lost by the Contractor or a third party".

"Fresh Oil" signs (W21-2) shall be used when prime is applied to pavement that is open to traffic. The signs are to remain until tracking of the prime ceases. The sign shall be erected a minimum of 500 feet preceding the start of the prime and on all side roads within the posted area. The "Fresh Oil" sign on the side road shall be posted a minimum of 200 feet from the mainline pavement.

"Rough Grooved Surface" signs (W8-I107) shall be used when the road has been cold milled and open to traffic. The signs shall remain in place until the milled surface condition no longer exists. These signs shall be erected a minimum of 500 feet preceding the start of the milled pavement and on all side roads within the posted area. The "Rough Grooved Surface" signs on the side roads shall be posted 200 feet from the mainline pavement. All signs shall have an 18" x 18" orange flag and amber flashing light attached.

Whenever a lane is closed to traffic using Standard 701606, 701601, or 701701, the pavement width transition sign (W4-2R or W4-2L) shall be used in lieu of "Workers" sign (W21-1 or W21-1a).

Whenever any vehicle, equipment, workers or their activities infringe on the shoulder or within 15 feet of the traveled way and the traveled way remains unobstructed, then the applicable Traffic Control Standard shall be 701006, 701011, 701101, or 701701. "Shoulder Work Ahead" sign (W21-5(0)-48) shall be used in lieu of the "Workers" sign (W21-1 or W-21-1a).

The Contractor shall provide and erect any other signs that are required for traffic safety operations and the conveyance of traffic information to the motorist, which may not be included in the Traffic Control

Standards. The requirement for these signs shall be determined by and installed at the direction of the Engineer.

Barricades: Any drop off greater than 3 inches, but less than 6 inches within 8 feet of the pavement edge shall be protected by Type I or II barricades equipped with mono-directional steady burn lights at 100 foot center to center spacing. If the drop off within 8 feet of the pavement edge exceeds 6 inches, the barricades mentioned above shall be placed at 50 foot center to center spacing. Barricades that must be placed in excavated areas shall have leg extensions installed such that the top of the barricade is in compliance with the height requirements of Standard 701901. In addition to the placement of barricades as described above, pavement drop off signs (W8-9a) shall be used along with the barricades and at the direction of the Engineer.

Placement of all signs, barricades or drums shall proceed in the direction of flow of traffic. Removal of all signs, barricades or drums shall start at the end of the construction areas and proceed toward oncoming traffic unless otherwise directed by the Engineer.

All Type I and Type II barricades, drums and vertical panels shall be equipped with a steady burn light when used during hours of darkness unless otherwise stated herein.

Check barricades shall be placed in work areas perpendicular to traffic every 1,000 feet, one per lane and per shoulder, to prevent motorists from using work areas as a traveled way. Two additional check barricades shall be placed in advance of each patch excavation or any other hazards in the work area, the first at the edge of the open traffic lane and the second centered in the closed lane. Check barricades shall be Type I or II and equipped with a flashing light.

Arrow Boards. A flashing arrow board shall be operating at all times when a lane is closed to traffic on a multilane highway. Arrow boards shall be provided and located in a head-on position within each lane closure taper.

Temporary Concrete Barrier Vertical Panels and Lights. Whenever temporary concrete barrier is specified in the plans, vertical panels and steady burning lights meeting the requirement of Articles 1106.01 and 1106.02 of the Standard Specifications and Standard 701901 shall be installed on the barrier at 50 foot centers minimum or at the spacing shown on the plans. The method of mounting shall be approved by the Engineer. Upon conclusion of the work, the panels and lights shall be removed and shall remain the property of the Contractor.

Pedestrian Sidewalk Control. The Contractor shall install, maintain and remove necessary signs and barricades needed to direct pedestrians to usable sidewalks and walkways during the construction in accordance with Traffic Control Standard 701801 or as directed by the Engineer. The Contractor shall make adequate provision for the free passage of foot traffic at all intersecting streets which are to remain open to traffic. The materials or equipment used in the construction of this improvement shall be so placed as to afford access to abutting private properly and to all hydrants and valves with a minimum of inconvenience.

All barricades shall be Type I or II equipped with flashing lights. At each point of closure, sufficient numbers of barricades shall be used to completely close the sidewalk to pedestrian movement. Where construction activities involve sidewalks on both sides of the street, the work shall be staged so that both sidewalks are not out of service at the same time.

107.09 Public Convenience and Safety. Revise the Seventh paragraph of this Article to read as follows:

The following vertical and horizontal restrictions shall pertain to roads as defined in the Illinois Highway Code, Article 2, Division 1, Section 2-101, 2-102, and 2-103 when construction is being performed with the road open to traffic.

The Contractor shall provide a telephone number where a responsible individual can be contacted on a 24-hour-a-day basis to receive notification of any deficiencies regarding traffic control and protection. The Contractor shall dispatch workers, materials and equipment to correct any such deficiencies. The Contractor shall respond to any call from the Department concerning any request for improving or correcting traffic control devices and begin making the requested repairs within two hours from the time of notification.

Personal vehicles shall not park within the right-of-way except in specific areas designated by the Engineer.

The contractor shall maintain at least one lane of traffic at all times on two lane roads and at least one lane in each direction on 4 or more lane roads, during the construction of this project. The Contractor shall also maintain areas to entrances and side roads along the proposed improvement. Interference with traffic movements and inconvenience to owners of abutting property and the public shall be kept to a minimum. Any delays or inconveniences caused to the Contractor by complying with these requirements shall be considered as incidental to the contract, and no additional compensation will be allowed.

On two lane roads, the Contractor is to plan the work so that there will be no open holes in the pavement and that all barricades will be removed from the pavement during non-work hours.

On four or more lane highways, there shall be no open holes in the pavement being used by the traveling public. Lane closures, if allowed, will be in accordance with the applicable standards, any staging details shown in the plans and other applicable contract documents.

The Contractor shall remove all equipment from the shoulders and medians after work hours.

No road closures or restrictions shall be permitted except those covered by the Traffic Control Highway Standards without written approval by the Engineer.

When traveling in lanes open to public traffic, the Contractor's vehicles shall always move with and not against or across the flow of traffic. These vehicles shall enter or leave work areas in a manner which will not be hazardous to, nor interfere with, traffic.

Pavement Markings. Temporary pavement marking paint used on temporary or unfinished surfaces shall be maintained to the highest degree of visibility and reflectivity and on long term projects shall be repainted when the temporary pavement marking shows signs of deterioration or at a minimum of every three (3) months and as directed by the Engineer at no additional cost and is considered as incidental to the cost of Traffic Protection.

Temporary pavement marking shall be applied as solid unbroken lines when used to delineate any pavement transition, turn lane transition and storage bay. Double yellow centerline shall be used across a bridge deck where the distance to be marked is less than 160 feet.

Temporary raised reflective bi-directional (amber) pavement markers (Section 781 and Article 1096.02 of the Standard Specifications) shall be used, and replaced when required, throughout a temporary by-pass detour pavement at no additional cost.

Method of Measurement. Delete: Article 701.19 Method of Measurement

Traffic Protection will not be measured for payment but shall include the furnishing, installing, maintaining, relocation and removal of traffic control devices required in the plans and these special provisions and all temporary pavement marking paint and tape lines, letters and symbols.

Basis of Payment. Delete: Article 701.20 Basis of Payment

This work will be paid for at the lump sum price for TRAFFIC PROTECTION, which price shall be payment in full for all labor, materials, transportation, handling and incidentals necessary to furnish, install, maintain, replace, relocate and remove all traffic control devices when required, such as signing, arrow boards, barricades, plastic drums, road closures, temporary pavement marking paint and tape lines and letters and symbols (Section 780 and Article 1095.02 of the Standard Specifications), temporary concrete barrier vertical panels and lights (Standard 701901), flexible delineators (Standard 701901), prismatic barrier reflectors (Sections 782 and 1097 of the Standard Specifications), temporary raised reflective pavement markers (Section 781 and Article 1096.02 of the Standard Specifications) and all traffic control devices indicated in the plans and specifications. The salvage value of all material removed (including existing traffic signs - when removal is required) shall be reflected in the bid price for this item.

Delays to the Contractor caused by complying with these requirements will be considered incidental to the item for Traffic Protection, and no additional compensation will be allowed.

Payment Adjustments. The Engineer may require additional traffic control to be installed in accordance with standards and/or designs other than those included in the plans. In such cases, the standards and/or designs will be made available to the Contractor at least one week in advance of the change in traffic control. Payment for any additional traffic control required will be in accordance with Article 109.04 of the Standard Specifications.

Revisions in the phasing of construction or maintenance operations, requested by the Contractor, may require traffic control to be installed in accordance with standards and/or designs other than those included in the plans. Revisions or modifications to the traffic control shown in the contract shall be submitted by the Contractor for approval by the Engineer. No additional payment will be made for a Contractor requested modification.

In the event the sum total value of all the work items for which traffic protection is required is increased or decreased by more than ten percent (10%), the contract bid price for Traffic Protection will be adjusted as follows:

Adjust contract price = $.25P + .75P\ [1 \pm (X-0.1)]$

Where "P" is the contract price for Traffic Protection

Where "X" = (Difference between original and final sum total value of all the work items for which protection is required) divided by (Original sum total value of all work items for which traffic protection is required)

The value of work items used in calculating the increase or decrease will include only items which have been added to or deducted from the contract under Article 104.02 of the Standard Specifications and only items which require use of Traffic Protection.

In the event the Department cancels or alters any portion of the contract which results in elimination or noncompletion of any portion of the work, payment for partially completed work will be made in accordance with Article 109.06 of the Standard Specifications.

SPECIAL PROVISION
FOR
PROJECT SIGNS PLAQUE

County will erect signs announcing `A Cook County Department of Transportation and Highways, Road Improvement Project' with a 24"X4" size plaque reading `COMING SOON' in front and `COMPLETED' in back. Contractor will remove this 24"X4" size plaque and store it at the beginning of work on the contract. When work on the contract is completed, Contractor will attach the plaques to the Project signs reading `COMPLETED'. The cost of this work will be incidental to the contract.

SPECIAL PROVISION
FOR
TRAFFIC SIGNAL WORK GENERAL

All work and equipment performed and installed under this contract, shall be governed and shall comply to the State of Illinois "Standard Specifications for Road and Bridge Construction" latest edition, herein referred to as the Standard Specifications and the "District One Standard Design Details"; the State of Illinois "Manual on Uniform Traffic Control Devices for Streets and Highways", latest edition; the "National Electrical Code" latest edition herein referred to as the NEC; the National Electrical Manufacturers Association, herein referred to as NEMA (all publications for traffic control items) latest editions; the International Municipal Signal Association, herein referred to as IMSA "Official Wire & Cable Specifications Manual" latest edition; the Institute of Transportation Engineers, herein referred to as the ITE, Technical Report No.1, "A Standard for Adjustable Face Vehicular Traffic Control Heads"; AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaries and Traffic Signals" and the "Supplemental Specifications" and "Recurring Special Provisions" noted herein.

The following Special Provisions supplement the above specifications, manuals, and code. The intent of these Special Provisions is to prescribe the materials and construction methods commonly used for traffic signal installations. All material furnished shall be new. The locations and the details of all installations shall be as indicated on the Plans or as directed by the Engineer. Traffic signal construction and maintenance work shall be performed by personnel holding IMSA Traffic Signal Technician Level II certification. The work to be done under this contract consists of furnishing and installing all traffic signal work as specified in the Plans and as specified herein in a manner acceptable and approved by the Engineer. In case of conflict with any part or parts of said documents, these Special Provisions shall take precedence and shall govern.

In order to reduce possible vehicular conflicts with fixed objects and avoid public criticism, it is necessary to require that no posts, poles, heads, or controller cabinets be installed until all traffic signal control equipment is brought to and located on the job site.

The construction, installation and/or removal work shall be accomplished at all the intersections within the limits of this project or as shown in the plans.

Description of Work. The work to be done under this contract consists of furnishing and installing all traffic signal work as specified on the Plans and as specified herein in a manner acceptable and approved by the Engineer.

Restoration. All areas and plant material damaged by the installation of Traffic Signal posts, mast arm poles, underground cables or conduits, handholes and control cabinets shall be replaced as follows:

- Grass Areas: Replace top soil to a depth of four (4) inches (100 mm), re-grade shoulders, ditch slopes, and open areas back to former existing grades, fertilize, seed and mulch all damaged areas.

- Sod Areas (areas adjacent to residential, commercial and industrial properties and any other areas as directed by the engineer): Fertilize and re-sod damaged areas.
- Plant Materials: Remove and replace damaged trees, shrubs and vines with the same varieties that existed prior to damage.

- Shoulders other than Stabilized and Backslopes, medians, sidewalks, pavement, etc.: Replace shoulder to original condition and restore edge of backslope to original lines and grades. Medians, sidewalks and pavement shall be replaced in kind.

- All brick pavers disturbed in the work area shall be restored to their original configuration or as directed by the Engineer. All damaged brick pavers shall be replaced with a comparable material approved by the Engineer

All damaged landscape shall be replaced in accordance with Section 250 through 254 of the Standard Specifications.

Any damage, due to the installation of traffic signal equipment; or necessary removal at handholes, jacking pits, and inspection openings, of sidewalks, curbs, gutters, median and island paving, and/or pavement, shall be repaired or replaced by the Contractor. Repair or replacement shall be made with a like material of like thickness to the existing surface. Restoration of traffic signal work area shall be included in related pay items such as foundation, conduit, handhole, trench and backfill, etc.

Control of Traffic Signal Materials.

All work shall meet the requirements of the "Standard Specifications for Road and Bridge Construction", except as follows:

The controller and all control equipment shall be of a manufacturer that is approved by this Department. The manufacturer shall have a representative located in the six (6) county Chicago areas.

The intent of this Section is to prescribe the materials and construction methods commonly used for traffic signal installations. All material furnished shall be new. Traffic materials and equipment shall bear the U.L. label whenever such labeling is available.

All iron and steel products, which are to be incorporated into work shall be domestically manufactured or produced and fabricated. The contractor shall obtain from the iron or steel producer and/or fabricator, in addition to the mill analysis, a certification that all iron or steel materials meet these domestic source requirements.

The application of all coatings, epoxy, galvanizing, painting, etc., to metal products shall be domestically applied.

Metal material other than iron and steel, which are not domestically produced, may be accepted provided:

(a) The contractor notifies the Department in advance of his/her intension to use other than domestically manufactured or produced material.

(b) Written evidence is provided in English of compliance with all requirements of the specifications.

(c) Physical tests conducted by the department verify the acceptability of the material.

Before any signal equipment, including mast arm assemblies, poles, controller cabinets, all control equipment and signal heads, are delivered to the job site, the Contractor shall obtain and forward to the Engineer a certified, notarized statement from the manufacturer, containing the catalog numbers of the

equipment and/or material, guaranteeing that the equipment and/or material, after manufacture, comply in all respects with the requirements of the Specifications and these Special Provisions.

All material approval requests shall be within thirty (30) consecutive calendar days after the Contract is awarded, or at the pre-construction meeting, whichever is first.

All cost of work and materials required to comply with the above requirements shall be included in the pay item bid prices, under which the subject materials and signal equipment are paid, and no additional compensation will be allowed. Materials and signal equipment not complying with the above requirements that have been installed on the job will be done at the Contractor's own risk and may be subject to removal and disposal at the Contractor's expense.

The Contractor must submit the following for approval by the Engineer:

- Three (3) complete set of manufacturer's descriptive literature, drawings, and specifications of the traffic signal equipment, handholes, junction box, cable, conduit and all associated items that will be installed on the contract. Partial or incomplete submittal will be returned without review.

- The contractor shall supply samples of all wire and cable, and shall make up and supply samples of each type of cable splice proposed for use in the work for the-Engineer's approval.

- Seven (7) complete shop drawings of the mast arm assemblies and poles including combination mast arm poles are required, showing in detail the fabrication, anchor bolts, reinforcing materials, design material, thickness of sections and weld sizes. These drawing shall be at least 11" x 17" (275mm x 425mm) in size and adequate quality for microfilming.

- Certain non-standard mast arm poles and assembles will require additional review. The Contractor shall account for additional review time in their schedule.

- Seven (7) copies of a letter from the Traffic Signal Contractor on company letterhead listing contract number or permit number, project location limits, pay item number and description and listing the manufacturer's name and model numbers of the proposed equipment to be supplied and stating that the proposed equipment meets all Contract requirements. The letter will be reviewed by the Engineer to determine whether the equipment to be used is approvable. The letters will be stamped as approved or not approved accordingly and returned to the Contractor.

- Five (5) copies of a letter from the Traffic Signal Contractor listing the System Coordination and Timing (SCAT) consultant's name shall be supplied. The letter will be reviewed by the Engineer to determine whether the SCAT consultant to be used is approved. The letters will be stamped as approved or not approved accordingly and returned to the Contractor.

- Where certifications and/or warranties are specified. The information submitted for approval shall include certifications and warranties. Certifications involving inspections and/or tests of material shall be complete with all test data, dates and times.

- All above shall be stamped with the Section Number, Permit Number, or Contract Number and Intersection(s) name(s). Pay item numbers shall also be included. If the above required information is

not on each sheet of the above literature or letters, the equipment and material cuts will not be reviewed and shall be returned to the Contractor.

- Exceptions, Deviations and Substitutions. In general, exceptions to and deviations from the requirements of the Contract Documents will not be allowed. It is the Contractor's responsibility to note any deviations from Contract requirements at the time of submittal and to make any requests for deviations in writing to the Engineer. In general, substitutions will not be acceptable. Requests for substitutions must demonstrate that the proposed substitution is superior to the material or equipment required by the Contract Documents. No exceptions, deviations or substitutions will be permitted without the approval of the Engineer.

- After the engineer reviews the submittals for conformance with the design concept of the project, the Engineer will stamp the drawings indicating their status. Since the Engineer's review is for conformance with design concept only. It is the Contractor's responsibility to coordinate the various items into a working system as specified. The Contractor shall not be relieved from responsibility for errors or omissions in the shop working, layout drawings, or other documents by the Departments approval thereof. The Contractor must be in full compliance with contract and specification requirements.

Maintenance and Responsibility.

Revise Article 801.11 to read as follows.

a) Existing traffic signal installations and/or any electrical facilities at all or various locations may be altered or reconstructed totally or partially as part of the work on this Contract. The Contractor is hereby advised that all traffic control equipment, presently installed at these locations, may be the property of the State of Illinois, Department of Transportation, Division of Highways, Cook County Department of Transportation and Highways, Private Developer, or the Municipality in which they are located. Once the Contractor has begun any work on any portion of the project all traffic signals within the limits of this contract or those which have the item "Maintenance of Existing Traffic Signal Installation", "Temporary Traffic Signal Installation(s)" and/or "Maintenance of Existing Flashing Beacon Installation", shall become the full responsibility of the Contractor. Automatic Traffic Enforcement equipment is not owned by the County and the Contractor shall not be responsible for maintaining it during construction. The Contractor shall supply the engineer and the Department's Electrical Maintenance Contractor a 24-hour emergency contact name and telephone number.

b) When the project has a pay item for "Maintenance of Existing Traffic Signal Installation", "Temporary Traffic Signal Installation(s)" and/or "Maintenance of Existing Flashing Beacon Installation", the Contractor must notify both the Design Engineer at (312) 603-1730 and the Department's Electrical Maintenance Contractor, of their intent to begin any physical construction work on the Contract or any portion thereof. This notification must be made a minimum of seven (7) working days prior to the start of construction to allow sufficient time for inspection of the existing traffic signal installation(s) and transfer of maintenance to the Contractor. If work is started prior to an inspection, maintenance of the traffic signal installation(s) will be transferred to the Contractor without an inspection. The Contractor will become responsible for repairing or replacing all equipment that is not operating properly or is damaged at no cost to the owner of the traffic signal. Final repairs or replacement of damaged equipment must meet the approval of the

Engineer prior to or at the time of final inspection otherwise the traffic signal installation will not be accepted.

c) Projects which call for the storage and re-use of existing traffic signal equipment shall meet the requirements of Article 801.15(C) of the Standard Specifications, which call for a 30 day test period prior to project acceptance.

d) Contracts such as pavement grinding or patching which result in the destruction of traffic signal loops may not require maintenance transfer, unless a pay item of "Maintenance of Existing Traffic Signal Installation" is included in the project. When the pay item of "Maintenance of Existing Traffic Signal Installation" is not included, the Contractor is required to notify of intent to work and an inspection. A minimum of seven (7) working days prior to the loop removal, the Contractor shall notify the Design Engineer at (312) 603-1730, the Department's Electrical Maintenance Contractor and the owner of automatic traffic enforcement prior to the loop removal, at which time arrangements will be made to adjust the traffic controller timing to compensate for the absence of detection. Damaged Automatic Traffic Enforcement equipment, including cameras, detectors, or other peripheral equipment, shall be replaced by others, per Permit agreements or other agreements, at no cost to the contract except for City of Chicago projects in which the detectors shall be replaced. See additional requirements in these specifications under Inductive Loop Detector.

e) The Contractor is further advised that the existing traffic signal(s), and/or the existing temporary installation(s), must remain in operation during all construction stages except for the most essential down time. Any shutdown of the traffic signal installation(s), for a period to exceed fifteen (15) minutes, must have the prior approval of the Engineer. Such approval will generally only be granted during the period extending from 10:00 a.m. to 3:00 p.m. on weekdays. Shutdowns will not be allowed during inclement weather or during Holiday periods. Any other traffic signal shutdown, either for periods in excess of one (1) hour or outside of the 10:00 a.m. to 3:00 p.m. weekday period must have prior approval of the Engineer. The Contractor, prior to the commencement of his work, shall notify the State Electrical Maintenance Contractor, the Cook County Electrical Maintenance Contractor, or the concerned Municipality, of his intent to perform this work.

f) The Contractor shall be fully responsible for the safe and efficient operation of the traffic signals. Any inquiry, complaint or request by the Department, the Department's Electrical Maintenance Contractor or the public, shall be investigated and repairs begun within one hour. Failure to provide this service will result in liquidated damages of $500 per day per occurrence. In addition, the Department reserves the right to assign any work not completed within this timeframe to the Electrical Maintenance Contractor. All costs associated to repair this uncompleted work shall be the responsibility of the Contractor. Failure to pay these costs to the Electrical Maintenance Contractor within one month after the incident will result in additional liquidated damages of $500 per month per occurrence. Unpaid bills will be deducted from the cost of the Contract. The Department's Electrical Maintenance Contractor may inspect any signalizing device on the Department's highway system at any time without notification.

g) Any proposed activity in the vicinity of a highway-rail grade crossing must adhere to the guidelines set forth in the current edition of the Manual on Uniform Traffic Control Devices (MUTCD) regarding work in temporary traffic control zones in the vicinity of highway-rail grade crossings which states that lane restrictions, flagging, or other operations shall not create conditions where

vehicles can be queued across the railroad tracks. If the queuing of vehicles across the tracks cannot be avoided, a uniformed law enforcement officer or flagger shall be provided at the crossing to prevent vehicles from stopping on the tracks, even if automatic warning devices are in place.

Damage to Traffic Signal System.

Add the following to Article 801.12(b).

a) Any damaged equipment or equipment not operating properly from any cause whatsoever shall be repaired with new equipment provided by the contractor at no additional cost to the Contract and/or owner of the traffic signal system all as approved by the Engineer. Final repairs or replacement of damaged equipment must meet the approval of the Engineer prior to or at the time of final inspection otherwise the traffic signal will not be accepted. Cable splices outside the controller cabinet will not be allowed.

b) Automatic Traffic Enforcement equipment, such as Red Light Enforcement cameras, detectors, and peripheral equipment, damaged or not operating properly from any cause whatsoever, shall be the responsibility of the municipality or the Automatic Traffic Enforcement Company per Permit agreement or other agreements. Except in the City of Chicago in which detectors are damaged due to a County project.

Traffic Signal Inspection (Turn – On).

Revise Article 801.15b to read as follows.

a) The Contractor must have all electric work completed, the electrical service installation connected by the utility company and equipment field tested by the Vendor prior to the Department's "turn-on" field inspection. If in the event the Engineer determines the work is not complete and the inspection will require more than two (2) hours to complete, the inspection shall be canceled and the Contractor will be required to reschedule at another date. The maintenance of the traffic signals will not be accepted until all punch list work is corrected and re-inspected. The Department will not grant a field inspection until written certification is provided from the Contractor stating the equipment has been field tested and the intersection is operating according to Contract requirements.

b) When the road is open to traffic, except as otherwise provided in Section 850 of the Standard Specification, the Contractor may request a turn-on and inspection of the completed traffic signal installation at each separate location. This request must be made to the Design Engineer at (312) 603-1730 a minimum of seven (7) working days prior to the time of the requested inspection. The Department will not grant a field inspection until notification is provided from the Contractor that the equipment has been field tested and the intersection is operating according to Contract requirements. The Department's facsimile number is (312) 603-9956. The Contractor must invite local fire department personnel to the turn-on when Emergency Vehicle Pre-emption (EVP) is included in the project. When the contract includes the item RE-OPTIMIZE TRAFFIC SIGNAL SYSTEM, OPTIMIZE TRAFFIC SIGNAL SYSTEM, or TEMPORARY TRAFFIC SIGNAL TIMINGS, the Contractor must notify the SCAT Consultant of the turn-on schedule, as well as stage changes and phase changes during construction.

c) The Contractor must have all traffic signal work completed and the electrical service installation connected by the utility company prior to requesting an inspection and turn-on of the traffic signal installation. The Contractor shall be responsible to provide a Police Officer to direct traffic at the time of testing.

d) The Contractor shall provide a representative from the control Equipment Vendor's office to attend the traffic signal inspection for both permanent and temporary traffic signal turn-ons. Upon demonstration that the signals are operating and all work is completed in accordance with the Contract and to the satisfaction of the Engineer, the Engineer will then allow the signals to be placed in continuous operation. The Agency that is responsible for the maintenance of each traffic signal installation will assume the maintenance upon successful completion of this inspection.

e) Acceptance of the traffic signal equipment by the Department shall be based upon inspection results at the traffic signal turn-on. If approved, traffic signal acceptance shall be verbal at the turn-on inspection followed by written correspondence from the Engineer. The Contractor shall be responsible for all traffic signal equipment and associated maintenance thereof until Departmental acceptance is granted.

f) All equipment and/or parts to keep the traffic signal installation operating shall be furnished by the Contractor. No spare traffic signal equipment is available acceptable from the Department.

g) All punch list work shall be completed within two (2) weeks after the final inspection. The Contractor shall notify the Design Engineer at (312) 603-1730 to inspect all punch list work. Failure to meet these time constraints shall result in liquidated damage charges of $500 per month per incident.

h) All cost of work and materials required to comply with the above requirements shall be included in the pay item bid prices under which the subject materials and signal equipment are paid and no additional compensation will be allowed. Materials and signal equipment not complying with the above requirements that have been installed on the job will be at the Contractor's own risk and shall be subject to removal and disposal at the Contractor's expense.

i) The Contractor shall furnish the Cook County Department of Transportation and Highways with any special tools or wrenches that may be required for assembling or maintaining the control equipment and traffic control signal head assemblies.

j) All control cable, when complete in place but before permanent connection, shall be subject to insulation tests at the discretion of the Engineer. The tests shall be made with approved insulation resistance testing equipment rated at 500 volts D.C. and witnessed by the Engineer. Results of these tests shall be submitted to the Department in written form, bearing the Engineers signature and shall become part of the project records. A final inspection of the traffic signal installation shall not be held until results of this insulation test have been received.

k) All equipment such as new controllers and allied central equipment with the exception of cable, conduit, and other materials which require the use of the State of Illinois Materials Testing Laboratories, shall be built in the suppliers shop and inspected by a representative of this Department prior to the installation of such equipment, and upon approval of this equipment an inspection ticket will be issued to the Contractor by the inspection agency (State of Illinois Material Testing Laboratory or the Cook County Transportation and Highways Mechanical-Electrical

Section). The controller and allied control equipment shall be prepared in the suppliers shop and run under a load of a minimum of 500 watts per phase for at least 48 hours before it is inspected for proper operation and sequencing. After it passes this test an inspection ticket will be issued by the Cook County Transportation and Highways Mechanical-Electrical Section representative and it can then be delivered to the job site for installation.

l) Upon completion of the installation, a final inspection will be carried out by qualified representatives of the Highway Agencies involved.

m) If the Contractor fails to comply with any of the aforementioned requirements, the County shall impose such sanction as it may determine to be appropriate including but not limited to withholding all payments to the Contractor on this contract until the provisions of this special provision are complete with and/or implementation of article 108.10 of the standard specifications.

At the final inspection it will be required that the Contractor will have submitted to the Engineer all necessary inspection tickets for all new equipment and materials installed under this Contract. If the Contractor has not obtained the inspection tickets on any portion of the new equipment and materials, the representative of this Department will have the authority to postpone the final inspection until such time as the above has been satisfied. Any postponement of the final inspection for this reason shall not relieve the Contractor of his full maintenance responsibilities until such time as the installation is re-inspected and accepted by the County.

The County requires the following from the Contractor at traffic signal turn-on.

1) The Contractor shall, at the turn-on furnish one set of signal plans (24"x36") of record with field revisions marked in red ink to the maintaining agency.

2) Written notification from the Contractor and the Equipment Vendor of satisfactory field testing.

3) A knowledgeable representative of the controller equipment supplier shall be required at the permanent and temporary traffic signal turn-on. The representative shall be knowledgeable of both cabinet design and controller functions and shall have sufficient test and spare equipment to make the traffic signal installation operational.

4) A copy of the approved material letter.

5) One (1) copy of the operation and service manuals of the signal controller and associated control equipment.

6) Five (5) copies 11" x 17" (280 mm X 430 mm) or 22" x 34" (560 mm x 860 mm) of the cabinet wiring diagrams and cable logs.

7) The controller manufacturer shall supply a printed form, not to exceed 11" x 17" (280 mm x 430 mm), for recording the traffic signal controller's timings; backup timings, coordination splits, offsets, cycles; TBC; Time of Day, week and year programs; traffic responsive program, detector phase assignment, type and detector switching; and any other functions programmable from the keyboard. The form shall include a location, date, manufacturers name, controller model and software version. The form shall be approved by the Engineer and a minimum of three (3) copies must be furnished at each turn-on. The manufacturer must provide all programming information used within the controller at the time of turn-on.

8) All Manufacturer and Contractor warranties and guaranties required by Article 801.14.

RECORD DRAWINGS

The requirements listed for Electrical Installation shall apply for Traffic Signal Installations in Article 801.16. Revise the 2nd paragraph of Article 801.16 of the Standard Specifications to read:

a. "When the work is complete, and seven days before the request for a final inspection, the full-size set of contract drawings. Stamped "RECORD DRAWINGS", shall be submitted to the Engineer for review and approval and shall be stamped with the date and the signature of the Contractor's supervising Engineer or electrician. The record drawings shall be submitted in PDF format on CDROM as well as hardcopy for review and approval.

b. In addition to the record drawings, copies of the final catalog cuts which have been Approved or Approved as Noted shall be submitted in PDF format along with the record drawings. The PDF files shall clearly indicate the pay item either by filename or PDF Table of Contents referencing the respective pay item number for multi-item PDF files. Specific part or model numbers of items which have been selected shall be clearly visible."

Add the following to Article 801.16 of the Standard Specifications:

"In addition to the specified record drawings, the Contactor shall record GPS coordinates of the following traffic signal components being installed, modified or being affected in other ways by this contract:

- All Mast Arm Poles and Posts
- Handholes
- Conduit roadway crossings
- Controller Cabinets
- Communication Cabinets
- Electric Service Disconnect locations
- CCTV Camera installations
- Fiber Optic Splice Locations

Datum to be used shall be North American 1983.

Data shall be provided electronically and in print form. The electronic format shall be compatible with MS Excel. Latitude and Longitude shall be in decimal degrees with a minimum of 6 decimal places. Each coordinate shall have the following information:

1. Description of item
2. Designation or approximate station if the item is undesignated
3. Latitude
4. Longitude

Examples:

Description	Designation	Latitude	Longitude
Mast Arm Pole Assembly (dual, combo, etc)	MP (SW, NW, SE or NE corner)	41.580493	-87.793378
FO mainline splice handhole	HHL-ST31	41.558532	-87.792571
Handhole	HH	41.765532	-87.543571
Electric Service	Elec Srv	41.602248	-87.794053
Conduit crossing	SB IL83 to EB I290 ramp SIDE A	41.584593	-87.793378
PTZ Camera	PTZ	41.584600	-87.793432
Signal Post	Post	41.558532	-87.792571
Controller Cabinet	CC	41.651848	-87.762053
Master Controller Cabinet	MCC	41.580493	-87.793378
Communication Cabinet	ComC	41.558532	-87.789771
Fiber splice connection	Toll Plaza34	41.606928	-87.794053

Prior to the collection of data, the contractor shall provide a sample data collection of at least six data points of known locations to be reviewed and verified by the Engineer to be accurate within 100 feet. Upon verification, data collection can begin. Data collection can be made as construction progresses, or can be collected after all items are installed. If the data is unacceptable the contractor shall make corrections to the data collection equipment and or process and submit the data for review and approval as specified.

Accuracy. Data collected is to be mapping grade. A handheld mapping grade GPS device shall be used for the data collection. The receiver shall support differential correction and data shall have a minimum 5 meter accuracy after post processing.

GPS receivers integrated into cellular communication devices, recreational and automotive GPS devices are not acceptable.

The GPS shall be the product of an established major GPS manufacturer having been in the business for a minimum of 6 years."

Location of Underground State and County Maintained Facilities.

Revise Article 803 to read as follows.

If this contract requires the services of an electrical contractor, the Contractor shall be responsible at his/her own expense for locating existing IDOT and CCDOTH facilities prior to performing any work. If this contract does not require the services of electrical contractor, the Contractor may request one free locate for existing IDOT and CCDOTH electrical facilities from the Electrical Maintenance Contractor(s) prior to the start of any work. Additional requests may be at the expense of the Contractor. The location of underground traffic facilities does not relieve the Contractor of their responsibility to repair any facilities damaged during construction at their expense.

The exact location of all utilities shall be field verified by the Contractor before the installation of any components of the traffic signal system. For locations of utilities, locally owned equipment, and leased enforcement camera system facilities, the local Counties or Municipalities may need to be contacted, in the City of Chicago contact D.I.G.G.E.R. at (312) 744-7000 and for all other locations contact J.U.L.I.E. at 1-800-892-0123 or 811.

SPECIAL PROVISION
FOR
REBUILD EXISTING HANDHOLE
REBUILD EXISTING HEAVY DUTY HANDHOLE
REBUILD EXISTING DOUBLE HANDHOLE

This item shall consist of rebuilding a handhole, heavy duty handhole and/or double handhole at location(s) as shown on the plans or as directed by the Engineer. The work shall consist of removing the frame and cover and the walls of the handhole to a depth of thirteen (13) inches (330 mm) below finished grade.

Upon completion of the above work, for handhole and heavy duty handhole four (4) holes, for the double handhole six (6) holes, four (4) inches (100 mm) in depth and one half (1/2) inch (15 mm) in diameter, shall be drilled into the remaining concrete, for handhole and heavy duty handhole one (1) hole centered on each wall and for the double handhole one (1) hole centered on each side wall and two (2) holes evenly spaced on the front and back walls. Number 3 steel dowels eight (8) inches (200 mm) in length shall be furnished and installed in the drilled holes with masonry epoxy.

All concrete debris shall be removed from the right-of-way to a location approved by the Engineer.

The area adjacent to each wall of the handhole shall be excavated to allow forming. All steel hooks (galvanized), frame and cover and concrete shall be provided to construct a rebuilt handhole, heavy duty handhole or double handhole according to applicable portions of the Standard Specifications. If the Contractor damages the existing frame and cover, the Contractor shall be responsible for replacing the frame and cover at no cost to the County.

Basis of Payment. This work will be paid for at the contract unit price EACH for REBUILD EXISTING HANDHOLE, REBUILD EXISTING HEAVY DUTY HANDHOLE, REBUILD EXISTING DOUBLE HANDHOLE, REBUILD EXISTING HANDHOLE TO HEAVY DUTY HANDHOLE which price shall be payment in full for all labor, all materials, and equipment necessary to complete the work described above and as indicated in the Plans.

SPECIAL PROVISION
FOR
MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION

This item shall consist of maintaining the existing traffic signal installation at an intersection as shown on the plans and as described herein. Full maintenance responsibility shall start as soon as the Contractor begins any physical work on the contract or any portion thereof. The energy charges for the operation of the traffic signal installation shall be paid for by others. The maintenance of an existing traffic signal installation shall meet the requirements of Section 801.11 and 850 of the Standard Specifications except as follows:

This item shall include maintenance of all traffic signal equipment at the intersection, including emergency vehicle pre-emption equipment, master controllers, uninterruptible power supply (UPS and batteries) telephone service installations, communications cables and conduit to adjacent intersections, and other traffic signal equipment, but shall not include Automatic Traffic Enforcement equipment, such as Red Light Enforcement cameras, detectors, or peripheral equipment, not owned by the State and County.

Seven days prior to assuming maintenance of the existing traffic signal installation(s) under this contract, the Contractor shall request that the Resident Engineer contact the Cook County Design Engineer at (312) 603-1730 for an inspection of the installation(s). The Design Engineer shall establish a date and time of inspection and at this time shall check the installation to determine if any corrective work should be done by the State, the County, or the Municipalities Electrical Maintenance Contractor prior to the Contractor taking over the maintenance of the installation(s). The Resident Engineer, the Design Engineer, and the State, County, or Municipality Maintenance Contractor and the Contractor shall mutually agree on the date of maintenance transfer to the Contractor for this contract.

Maintenance Procedures The Contractor shall perform the following maintenance procedures for each existing installation designated to remain in operation during construction:

- Have on staff electricians with IMSA Level II certification to provide signal maintenance.
- Patrol and inspect each installation every two (2) weeks for proper alignment of signal heads, light detectors, lamp failures, and general operation of the traffic signal.
- Check all controllers every two (2) weeks, which will include visually inspecting all timing intervals, relays, detectors, and pre-emption equipment to insure that they are functioning properly. This item includes, as routine maintenance, all portions of emergency vehicle pre-emption equipment.
- Provide immediate corrective action to replace burned out lamps or damaged sockets. When lamps are replaced, the reflector and lens shall be cleaned. All replacement lamps shall meet the approval of the Engineer. The Contractor shall repair or replace all defective equipment from any cause whatsoever.
- Maintain in stock at all times a sufficient amount of materials and equipment to provide effective temporary and permanent repairs.

- Provide immediate corrective action when any part or parts of the system fail to function properly. Two far side heads facing each approach shall be considered the minimum acceptable signal operation pending permanent repairs. A near right signal must also be maintained. When repairs at a signalized intersection require that the controller be disconnected or otherwise removed from normal operation, and power is available, the Contractor shall place the traffic signal installation on flashing operation. The signals shall flash RED for all directions unless a different indication has been specified by the Engineer. The Contractor is required to place stop signs (R1-1-36) at each approach to the intersection as a temporary means of regulating traffic. At approaches, where a Yellow Flashing indication is necessary, as directed by the Engineer, stop signs will not be required. When the signals operate in flash, the Contractor shall furnish and equip all his vehicles assigned to the maintenance of traffic signal installations with a sufficient number of Stop Signs as specified herein. The Contractor shall maintain sufficient number of spare Stop Signs in stock at all times to replace Stop Signs which may be damaged or stolen.

- Replace defective or damaged equipment. If the proper sequence with full detection cannot be obtained immediately, a controller which will provide the proper sequence and full detection shall be installed within twelve (12) hours of removal of the original controller.

- The Contractor shall be required to maintain the existing type of equipment and sequence of operations during the period of time that the original control equipment is being overhauled

- Provide the Engineer with the names, addresses, and telephone numbers of two (2) persons qualified and assigned to the maintenance of the traffic signal installation. These people must be made available 24 hours per day, each and every day of the year for emergency calls by the Engineer.

- Respond to all emergency calls from the Department or others within one hour after notification and provide immediate corrective action. When equipment has been damaged or becomes faulty beyond repair, the Contractor shall replace it with new and identical equipment. The cost of furnishing and installing the replaced equipment shall be borne by the Contractor at no additional charge to the State or County. The Contractor may institute action to recover damages from a responsible third party. If at any time the Contractor fails to perform all work as specified herein to keep the traffic signal installation in proper operating condition or if the Engineer cannot contact the Contractor's designated personnel, the Engineer shall have the State's or the County's Electrical Maintenance Contractor perform the maintenance work required. The State's or County's Electrical Maintenance Contractor shall bill the Contractor for the total cost of the work. The contractor shall pay this bill within thirty (30) days of the date of receipt of the invoice or the cost of such work will be deducted from the amount due the Contractor. The Contractor shall allow the Electrical Maintenance Contractor to make reviews of the Existing Traffic Signal Installation that has been transferred to the Contractor for Maintenance.

Traffic signal equipment which is lost or not returned to the Department for any reason shall be replaced with new equipment meeting the requirements of the Standard Specifications and these special provisions.

Basis of Payment. This work will be paid for at the contract unit price EACH for MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION, which price shall be payment in full for all materials, equipment, and labor necessary to maintain the existing traffic signals as shown on the plans. Each intersection shall be paid for separately. Following the completion of the traffic signal maintenance transfer

to the Contractor, 30 percent of the bid price will be paid. Following the traffic signal maintenance transfer to County, state and/or local agency, 30 percent of the bid price will be paid. The remaining 40 percent will be paid when all items on the punch list are done to the satisfaction of the engineer.

SPECIAL PROVISION
FOR
CUTTING HOT-MIX ASPHALT SURFACE (FULL DEPTH)

Description. This work shall consist of the cutting of the hot-mix asphalt surface wherever indicated and to the depth as shown on the plans and as required by the Engineer.

The hot-mix-asphalt surface shall be cut to a straight line and a vertical plane by a method approved by the Engineer.

It shall be the responsibility of the Contractor to determine the thickness of the existing hot-mix-asphalt surface course as well as underlying pavement layers as may be impacted by the required cutting. No additional compensation will be allowed because of variations from the assumed thicknesses or from the thicknesses shown on the plans.

Basis of Payment. This work will be paid for at the Contract Unit Price per Foot for Cutting Hot-Mix Asphalt Surface (Full Depth).

REMOVAL AND REPLACEMENT OF FIRE HYDRANT

This work of this Pay Item shall consist of the removal and replacement of fire hydrants, including saw cutting, removal, and disposal of existing pavement; excavation; bracing; bedding and covering of pipe; 5 lineal feet of 6-inch connecting pipe; all required connections and fittings; auxiliary gate valve and valve box; polyethylene wrapping of connecting pipe, auxiliary valve, and hydrant; thrust blocking; hydrant barrel drain washed stone pocket; support; trench dewatering; trench backfilling with excavated materials; testing; disinfection; removal and disposal of waste excavated materials; protection replacement or repair of utilities; and backfilling with granular backfill materials where connecting pipe is below pavement.

Material:
Fire Hydrants:

1. Comply with AWWA C502.
2. Paint hydrants in red as approved by the Village.
3. Match the hydrants generally installed in the Village's water system.
   a. Acceptable manufacturers :
      (1) Alberico
      (2) American;
      (3) East Jordan
      (4) Mueller
      (5) Or approved equal.
4. Provide compression type with a 5-1/4-inch and minimum size main valve assembly, O-ring seals, two 2-1/2-inch hose nozzles, and a 4-1/2-inch pumper nozzle with National Standard threads, a National Standard operating nut, and an above-ground break flange.
5. Provide a 6-inch auxiliary resilient seat type gate valve with restrained type joints or bituminous coated metal tie rods between the valves and the tee fittings.
6. Provide valve boxes with cover marked with the word "WATER".
   a. Bituminous coated carbon steel valve extension stems and 2-inch square operating nuts 2 inches below cover.
7. Provide valve box stabilizers on all hydrant auxiliary valves.
   a. Acceptable manufacturers :
      (1) Alberico
      (2) American
      (3) Adaptor, Inc.
      (4) Or approved equal.

Basis of Payment:
The work will be paid for at the Contract Unit Price for each REMOVAL AND REPLACEMENT OF FIRE HYDRANT.

WATER METER RELOCATION AND METER BOX REPLACEMENT

Description. This Work shall consist of the relocation of existing domestic water service meters and replacement of existing concrete domestic water service meter vaults and shall include all excavation , removal and disposal of waste excavated materials and existing debris, protection, repair, dewatering and replacement of existing water service lines, and all required fittings and connections as necessary. Work shall also include furnishing and installing a Type C, 24 inch diameter Catch Basin, 48 inch depth, with a Type 1 (Closed) Frame and Lid to be used as the new meter vault including all bedding and backfill materials and all grading associated with this installation.

The meter vaults in conflict must be relocated out of the path of the proposed sidewalk. Any excavation performed around the vault shall be backfilled with sand and thoroughly tamped.

Prior to final adjustment and during the construction operation, the Contractor shall be responsible for protecting the valve box from damage or from being filled with debris. Should this box become damaged or filled, it shall be repaired or cleaned by the Contractor and no additional compensation shall be made for this work. Should the Contractor encounter an inoperable water meter, the meter shall be replaced with a new water meter furnished by the Village of Robbins.

Basis of Payment. This work will be paid for at the contract unit price per each **WATER METER RELOCATION AND METER BOX REPLACEMENT**.

LIGHT POLE FOUNDATION, 24" DIAMETER, OFFSET

Description. This work shall consist of constructing and installing a 24 inch diameter, offset, light pole concrete foundation.

Materials and Construction Requirements. The concrete foundation shall be constructed and installed per the details in the Contract Drawings, and in conformance with Section 836 of the Standard Specifications and County requirements.

Contractor shall use the vacuum extraction method to excavate material to install concrete foundations located within 10 ft. of existing petroleum pipelines, 2 ft. of all other utilities, or as directed by the Engineer. Machine digging shall not be allowed.

Method of Measurement. Concrete foundations shall be measured for payment in feet, along the vertical and horizontal centerlines of the foundation without overlap.

Basis of Payment. This work shall be paid for at the contract unit price per foot for LIGHT POLE FOUNDATION, 24" DIAMETER, OFFSET, which shall include all labor, materials, and equipment to complete the work specified herein.

CONDUIT SPLICE

Description. This item shall consist of splicing two high density polyethylene (HDPE) unit duct type conduits together at the location shown on the drawings.

Materials. Coupler shall be clamp on type, fabricated from HDPE, and have corrosion resistant stainless steel band clamps and locking rings. O-ring joints shall be air pressure tested to hold over 130 psi, and the water sealing capability to withstand head pressures greater than 20 feet.

The coupler shall be UL listed for underground HDPE conduit connections in wet locations.

Installation. Prior to splicing, the ends of the conduits shall be beveled, and the coupler shall be installed per the manufacturer's installation requirements.

The Contractor shall record location of the conduit splice, and include on the Record Drawings.

Basis of Payment. This work shall be paid for at the contract unit price per each for CONDUIT SPLICE, which price shall include all labor, materials and equipment to complete the work as specified herein.

LIGHT POLE FOUNDATION, SPECIAL

Description. This work shall consist of furnishing all labor, material, tools and, equipment for removing and reinstalling aluminum railing, saw cutting and removing part of the existing parapet, retaining wall, and sidewalk slab, and reconstruction of the retaining wall, light pole support, parapet and sidewalk according to plans and as directed by the Engineer. All the work shall be according to IDOT Standard Specifications for Road and Bridge Construction, adopted January 1, 2012.

Materials. Materials shall be according to IDOT Standard Specifications for Road and Bridge Construction, adopted January 1, 2012:

Item	Section
(a) Concrete	503
(b) Reinforcement Bars, Epoxy coated	508
(c) Aluminum Railing	509

Construction Requirements. Sidewalks, curbs, drains, reinforcement and/or existing transverse and longitudinal joints which are to remain in place shall be protected from damage during removal and reconstruction. All damage caused by the Contractor shall be corrected, at the Contractor's expense, to the satisfaction of the Engineer.

The Contractor shall remove a section of the aluminum rails between splice points and one or two rail posts and save them at a safe place for reinstallation as directed by the Engineer.

The Contractor shall mark the limits of parapet, sidewalk, and retaining wall for removal and get the approval of the Engineer. The Contractor shall saw cut ¾" deep the limits of the removal and then remove the rest of the concrete with jack hammering. The existing reinforcement shall be saved as shown on the plans and incorporated into new concrete.

The Contractor shall construct retaining wall and parapet with light pole support after cleaning the concrete surface, installing new reinforcement, cleaning and incorporating the existing rebars as shown on the plans.

The existing aluminum railing shall be cut to fit the proposed rail spacing with a gap for the light pole, as shown on the plans and approved by the Engineer. The rail post spacing shall be coordinated and verified by the Engineer. New rail posts and caps will be required

Existing concrete sidewalk which is removed as a part of this work shall be replaced, in kind, to the satisfaction of the Engineer.

Basis of Payment. This work will be paid for at the contract unit price per each for LIGHT POLE FOUNDATION, SPECIAL, which shall include all labor, material, and equipment necessary for completing the work as specified here and shown on the plans. No additional payment will be made for this work.

MAINTAIN EXISTING LIGHTING SYSTEM

Description. Effective the date the Contractor's activities (electrical or otherwise) at the job site begin, the Contractor shall be responsible for the proper operation and maintenance of all existing and proposed lighting systems which are part of, or which may be affected by the work until final acceptance or as otherwise determined by the Engineer.

Existing lighting systems depicted on the plans are intended only to indicate the general equipment installation of the systems, and shall not be construed as an exact representation of the field conditions. At least one week prior to the beginning of construction of the proposed street lighting system, the Contractor shall conduct an inspection of the existing lighting units/system with a representative of the agency responsible for maintenance. The inspection shall reveal defective lighting equipment such as cable, mast arms, luminaries, light poles, controller and all other appurtenances that combine for a complete operating lighting system. The Contractor shall not be responsible for any defective lighting equipment. In case the Contractor fails to contact the maintaining agency for this inspection, the Contractor shall be held responsible for all items found defective at the completion of the contract.

The Contractor shall become responsible for the maintenance of the existing lighting units on a date mutually agreed upon between the Contractor and the maintaining agency representative, but no later than the beginning of any construction within the limits of this project. If any mobilization or any type of work begins on this project, the Contractor shall assume complete maintenance at that point and assume all deficiencies at their own expense. This maintenance shall remain in effect until written notice of final acceptance of the proposed lighting system is issued by the Engineer. Only after this requirement has been satisfied may the Contractor begin removal operations of the existing lighting units.

Maintenance of Existing Lighting Systems

Existing lighting systems. Existing lighting systems shall be defined as any lighting system or part of a lighting system in service prior to this contract. The contract drawings indicate the general extent of any existing lighting, but whether indicated or not, it remains the Contractor's responsibility to ascertain the extent of effort required for compliance with these specifications and failure to do so will not be justification for extra payment or reduced responsibilities.

Existing Lighting Systems Requiring Maintenance.

Village of Robbins - 139th St. Lighting System – Full Maintenance: 139th St. from Claire Blvd. to Coopers Grove Rd. (See One Line Circuit Diagram).

Village of Robbins - 135th St. Lighting System – Full Maintenance: 135th St. from Trumbull Ave. to Claire Blvd., and along Claire Ave. from Kedzie Ave. to 135th St. (See One Line Circuit Diagram).

Extent of Maintenance.

Partial Maintenance. Unless otherwise 'indicated, if the number of circuits affected by the contract is equal to or less than 40% of the total number of circuits in a given controller and the controller is not part of the contract work, the Contractor needs only to maintain the affected circuits. The affected circuits shall be isolated by means of in-line waterproof fuse holders as specified elsewhere and as approved by the Engineer.

Full Maintenance. If the number of circuits affected by the contract is greater than 40% of the total number of circuits in a given controller, or if the controller is modified in any way under the contract work, the Contractor shall maintain the entire controller and all associated circuits.

Maintenance of Proposed Lighting Systems

Proposed Lighting Systems. Proposed lighting systems shall be defined as any lighting system or part of a lighting system which is to be constructed under this contract.

The Contractor shall be fully responsible for maintenance of all items installed under this contract. Maintenance shall include, but not be limited to, any equipment failures or malfunctions as well as equipment damage either by the motoring public, Contractor operations, or other means. The potential cost of replacing or repairing any malfunctioning or damaged equipment shall be included in the bid price of this item and will not be paid for separately.

Lighting System Maintenance Operations

The Contractor's responsibility shall include all applicable responsibilities of the Electrical Maintenance Contract, State of Illinois, Department of Transportation, Division of Highways, District One. These responsibilities shall include the maintenance of lighting units (including sign lighting), cable runs and lighting controls. In the case of a pole knockdown or sign light damage caused by normal vehicular traffic, the Contractor shall promptly clear the lighting unit and circuit discontinuity and restore the system to service.

Responsibilities shall also include weekly night-time patrol of the lighting system, with patrol reports filed immediately with the Engineer and with deficiencies corrected within 24 hours of the patrol. Patrol reports shall be presented on standard forms as designated by the Engineer. Uncorrected deficiencies may be designated by the Engineer as necessitating emergency repairs as described elsewhere herein.

The following chart lists the maximum response, service restoration, and permanent repair time the Contractor will be allowed to perform corrective action on specific lighting system equipment.

INCIDENT OR PROBLEM	SERVICE RESPONSE TIME	SERVICE RESTORATION TIME	PERMANENT REPAIR TIME
Control cabinet out	1 hour	4 hours	7 Calendar days
Hanging mast arm	1 hour to clear	n/a	7 Calendar days
Radio problem	1 hour	4 hours	7 Calendar days
Motorist caused damage or leaning light pole 10 degrees or more	1 hour to clear	4 hours	7 Calendar days
Circuit out – Needs to reset breaker	1 hour	4 hours	n/a
Circuit out – Cable trouble	1 hour	24 hours	21 Calendar days
Outage of 3 or more successive lights	1 hour	4 hours	n/a
Outage of 75% of lights on one tower	1 hour	4 hours	n/a

INCIDENT OR PROBLEM	SERVICE RESPONSE TIME	SERVICE RESTORATION TIME	PERMANENT REPAIR TIME
Outage of light nearest RR crossing approach, Islands and gores	1 hour	4 hours	n/a
Outage (single or multiple) found on night outage survey or reported to EMC	n/a	n/a	7 Calendar days
Navigation light outage	n/a	n/a	24 hours

- **Service Response Time** -- amount of time from the initial notification to the Contractor until a patrolman physically arrives at the location.

- **Service Restoration Time** – amount of time from the initial notification to the Contractor until the time the system is fully operational again (In cases of motorist caused damage the undamaged portions of the system are operational.)

- **Permanent Repair Time** – amount of time from initial notification to the Contractor until the time permanent repairs are made if the Contractor was required to make temporary repairs to meet the service restoration requirement.

Failure to provide this service will result in liquidated damages of $500 per day per occurrence. In addition, the Department reserves the right to assign any work not completed within this timeframe to the Electrical Maintenance Contractor. All costs associated to repair this uncompleted work shall be the responsibility of the Contractor. Failure to pay these costs to the Electrical Maintenance Contractor within one month after the incident will result in additional liquidated damages of $500 per month per occurrence. Unpaid bills will be deducted from the cost of the Contract. Repeated failures and/or a gross failure of maintenance shall result in the State's Electrical Maintenance Contractor being directed to correct all deficiencies and the resulting costs deducted from any monies owed the contractor.

Damage caused by the Contractor's operations shall be repaired at no additional cost to the Contract.

Operation of Lighting

The lighting shall be operational every night, dusk to dawn. Duplicate lighting systems (such as existing lighting and proposed lighting) shall not be operated simultaneously. Lighting systems shall not be kept in operation during long daytime periods. The Contractor shall demonstrate to the satisfaction of the Engineer that the lighting system is fully operational prior to submitting a pay request. Failure to do so will be grounds for denying the pay request.

Method of Measurement. This work will be measured for payment as lump sum.

Basis of Payment. This work shall be paid for at the contract lump sum price for MAINTAIN EXISTING LIGHTING SYSTEM, which shall include all labor, materials and equipment to complete the work specified herein.

PAVEMENT EXPLORATORY POTHOLE

Description. This work shall consist of performing an exploratory pothole for the purpose of locating existing utilities under existing pavement that may be in conflict with proposed conduits to be bored under the roadway.

General. All work shall be in conformance with the Contract Drawings, Standard Specifications, County and JULIE requirements.

Keeping Road Open to Traffic. The road shall be kept open to traffic according to Article 701.17(e) of the Standard Specification.

Pavement Removal. The Contractor shall perform an exploration pothole large enough to locate existing utility, in locations where proposed conduits cross existing utilities. Contractor shall core the existing pavement the full depth, in accordance with the applicable requirements of Section 442 of the Standard Specifications.

Existing pavement removal shall be performed with an 18" diameter core machine, or as otherwise directed by the Engineer.

The Contractor shall use the vacuum extraction method to remove existing subgrade and trench backfill material to locate existing utilities. Machine digging will not be allowed.

Any existing utilities damaged during pavement removal operations (i.e. drainage mats, pipe underdrains, loop cables, etc.) shall be repaired or replaced.

Materials resulting from the removal of the existing pavement and unsuitable and unstable materials shall be disposed of according to Article 202.03 of the Standard Specifications.

Pavement Replacement. Contractor shall fill potholes with trench backfill, IDOT gradation FA 6, to a minimum of 1 ft. above the proposed conduit or existing uncovered utility. The remaining area shall be filled with controlled low-strength material (CLSM), in accordance with Section 593 of the Standard Specifications up to the top of subgrade of the removed pavement core. The Contractor shall provide an IDOT approved bonding agent, Utilibond or equal, between the existing pavement and the removed pavement core and reinsert the core into the pavement. Pavement coring method shall be similar to Utilicoring by Utilicor Technologies, Inc. or equal.

Opening Road Open to Traffic. Potholes shall be opened to traffic according to Article 701.17(e) of the Standard Specification. If potholes are not opened when required, additional traffic control shall be provided in accordance with IDOT and County standards, at no additional cost. Steel plates shall not be allowed to cover open cores in roadway.

Method of Measurement. This work will be measured for each exploratory core, regardless of the size and depth, which is required to verify existing utility conflict.

Basis of Payment. This work shall be paid for at the contract unit price per each for PAVEMENT EXPLORATORY POTHOLE, which shall include all labor, materials, and equipment to complete the work specified herein.

REMOVAL OF DECORATIVE LIGHTING UNIT, SALVAGE

Description. This work shall consist of the removal/salvage of existing decorative lighting unit, and disposal of their concrete foundation.

General. Removal of existing decorative lighting units shall be in conformance with Section 842 of the Standard Specifications and as described herein.

The existing lighting unit consists of an 11 ft. tall aluminum light pole and decorative luminaire. The light poles are located within the ROW, at the locations indicated on the Contract Drawings. The light poles are owned and maintained by the adjacent property Owner; therefore, the Contractor shall be responsible for coordinating disconnection and return of the existing light poles with the Owner. Prior to beginning any work the Contractor shall contact Mr. Bernard Ward, Director of the Village of Robbins Public Works, at (708) 704-7240, to schedule a meeting with the Owner and Village to inspect the existing equipment. Any damage to existing equipment will be documented, and the location of the lighting power source shall be verified. The Contractor shall not be responsible for any defective lighting equipment. If the Contractor fails to contact the Owner and Village prior to removing any of the existing lighting units, the Contractor shall be responsible for all items found defective upon return of the equipment.

Removal. The removal of light pole shall include the pole, luminaire, associated hardware, and concrete foundation (full depth). Luminaire shall be removed, boxed in container, and delivered with the light pole to the Owner.

Existing underground electric wires shall be disconnected from the power source prior to removing the light pole. Electrical cables and conduit shall be removed to 1 ft. below grade and abandoned. Voids caused by the removal of the foundation shall backfilled according to Article 841.02 of the Standard Specifications and restored with 4" top soil, sodding (salt tolerant), and fertilizers to the satisfaction of the Engineer.

Contractor shall dispose of removed material in accordance with Article 202.03 of the Standard Specifications.

Method of Measurement. Each lighting unit removed and delivered to the Owner shall be counted as a unit for payment. Removal and disposal of the concrete foundation (full depth), and any restoration shall be included in this pay item.

Basis of Payment. This work shall be paid for at the contract unit price per each for REMOVAL OF DECORATIVE LIGHTING UNIT, SALVAGE, which shall include all labor, materials, and equipment to complete the work specified herein.

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

√	Dir	File Name	Spec Title	Spec Dates
		Bureau of Design Special Provisions		
	DES\	1048945R.DOC	Maintenance of Roadways	E 9/30/85 R 11/1/96
	DES\	1078948R.DOC	Tollway Permit and Bond	E 01/13/89
	DES\	1080301.doc	Restriction on Working Days After a Completion Date	E 01/21/03 R 01/01/07
	DES\	1086587r.doc	Failure to Complete the Work on Time	E 09/30/85 R 01/01/07
	DES\	1088949R.DOC	Completion Date Plus Working Days	E 09/30/85 R 01/01/07
	DES\	1088951R.DOC	Incentive Payment Plan	E 10/01/95 R 01/01/07
	DES\	2080101.doc	RAP For Non-Porous Embankment and Backfill	E 04/01/01 R 01/01/07
	DES\	4020211.doc	Aggregate Surface Course for Temporary Access	E 04/01/01 R 01/02/07
	DES\	4408955R.DOC	Pavement Removal, Special	E 01/13/89 R 01/01/07
	DES\	5028956R.DOC	Rock Excavation for Structures, Special	E 09/30/85 R 01/01/07
	DES\	5038957R.DOC	Rustication Finish For Retaining Walls	E 05/01/90 R 01/01/07
	DES\	5501234R.DOC	Storm Sewer Adjacent to or Crossing Water Main	E 02/01/96 R 01/01/07
	DES\	5508960R.DOC	Storm Sewers & Sewer Connections to City of Chicago Sewers	E 09/30/85 R 01/01/07
	DES\	6008961R.DOC	Slotted Drain	E 09/30/85 R 01/01/07
	DES\	6028962R.DOC	Cleaning Existing Drainage Structures	E 09/30/85 R 12/01/11
	DES\	6068964R.DOC	Concrete Curb, Type B (Modified)	E 09/30/85 R 01/01/07
	DES\	6068965R.DOC	Stabilized Median Surface	E 09/30/85 R 01/01/07
	DES\	6370499.doc	Aggregate For Concrete Barrier (D-1)	E 03/11/04 R 01/24/08
	DES\	7016789.DOC	Traffic Control & Protection (Arterials)	E 02/01/96 R 03/01/11
	DES\	9018967R.DOC	Traffic Control Plan	E 09/30/85 R 01/01/07
	DES\	Adjustments-Reconstructs.doc	Adjustments and Reconstructions	E 03/15/11
	DES\	AGG SUBGR IMPROVEMENT(D1).doc	Aggregate Subgrade Improvement (D1)	E 02/22/12 R 11/01/13
	DES\	Bit Coated Agg Slopewall.doc	Bituminous Coated Aggregate Slopewall	E 01/01/07
	DES\	CA Backfill Trench Backfill Bedding (D1).doc	Coarse Aggregate for Backfill, Trench Backfill and Bedding (D-1)	E 11/01/11 R 11/01/13
	DES\	CAC-BMPR.doc	Calcium Aluminate Cement (BMPR)	E 07/01/13
	DES\	Conc Noise Abate Wall(D1).docx	Concrete Noise Abatement Walls (Absorptive & Reflective)(Dist 1)	E 09/05/08 R 01/12/11
	DES\	CTA Flag Coordination.doc	CTA Flagging and Coordination	E 05/14/98 R 08/27/09
	DES\	Drain Inlet Prot Undr Traff(D1).doc	Drainage And Inlet Protection Under Traffic (D-1)	E 04/01/11 R 04/02/11
	DES\	EGA Modified HMA.doc	HMA Mixtures, EGA Modified Performance Graded (PG) Asphalt Binder	E 03/16/09
	DES\	Embankment I.doc	Embankment I	E 03/01/11 R 11/01/13
	DES\	Embankment II.doc	Embankment II	E 03/01/11 R 11/01/13
	DES\	ENG FIELD OFF TY A (SP).doc	ENGINEER'S FIELD OFFICE TYPE A (SPECIAL)	E 12/01/11 R 05/01/13
	DES\	Ext Life Concr Pvmnt (D1).doc	Extended Life Concrete Pavement (30 Year) (D-1)	E 01/03/05 R 09/01/12
	DES\	FDHMA PrimeCoat(D1).doc	Bituminous Prime Coat for HMA Pvmnt (Full Depth)(D-1)	E 05/01/07
X	DES\	FineAggHMA(D1) Jan 1 2012.doc	Fine Aggregate for Hot-Mix Asphalt (HMA)(D-1)	E 05/01/07 R 01/01/12
X	DES\	Frict Agg(D1).doc	Friction Surface Aggregate (D-1)	E 01/01/11 R 11/01/13
	DES\	Grade Shape Shldr.doc	Grading and Shaping Shoulders	E 12/28/01 R 01/01/07
X	DES\	GTR Modified Binder(D-1).doc	Ground Tire Rubber (GTR) Modified Asphalt Binder (D-1)	E 06/29/06 R 01/01/13
X	DES\	Heat of Hydration Ctrl (D1).doc	Heat of Hydration Control for Concrete Structures (D-1)	E 11/01/13

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

	DES\	HMA IL 4.75 D1.doc	HMA Mixture IL-4.75 (D-1)	E 01/01/07 R 11/01/13
X	DES\	HMA Mix Des Reqmts(D-1).doc	HMA Mixture Design Requirements (D-1)	E 01/01/13 R 11/01/13
	DES\	HMA PFP PS(BMPR).doc	Hot Mix Asphalt - Pay for Performance Using Percent within Limits - Plant Sampling (BMPR)	E 03/04/08 R 02/20/13
	DES\	LightwtCellularConcFill(D1).doc	Lightweight Cellular Concrete Fill (D-1)	E 11/11/01 R 02/28/13
	DES\	Pub Conv Sfty(D1).doc	Public Convenience and Safety (D-1)	E 05/01/12 R 07/15/12
X	DES\	RAP-RAS(D1).doc	Reclaimed Asphalt Pavement (RAP) and Reclaimed Asphalt Shingles (RAS) (D-1)	E 11/01/12 R 11/01/13
	DES\	*SMA (D1).doc*	Stone Matrix Asphalt (SMA)(D-1)	E 04/01/97 R 11/01/13
	DES\	Status Utility Adj-90day.doc	Status of Utilities to be Adjusted	E 01/30/87 R 01/24/13
	DES\	TEMP PVMT.doc	Temporary Pavement	E 03/01/03 R 04/10/08
	DES\	WINTERIZED TEMP ACCESS 3-5-12.doc	Winterized Temporary Access	E 01/01/12 R 03/05/12
		Bureau of Electrical Special Provisions		
	ELE\	Elec Serv Disc lgt sig 2012.doc	Electric Service Disconnect, Lighting And Traffic Signal	E: 1/1/2012
X	ELE\	General Electrical Provisions 2012.doc	General Electrical Requirements GPS	E 1/1/2012
	ELE\	HPS Underpass 2012.doc	Underpass Luminaire, Hps, Stainless Steel Housing	E 1/1/2012
	ELE\	Junction Box Embedded 2012.doc	Junction Box Embedded in Structure	E 1/1/2012
	ELE\	Lighting Controller SCADA 2012.doc	Lighting Controller, Radio Control, Duplex, Console Type	E 1/1/2012
	ELE\	Lighting Maint 2012.doc	Maintenance of Lighting Systems	E 1/1/2012
	ELE\	Light Tower 2012.doc	Light Tower	E 1/1/2012
X	ELE\	Luminaire 2012.doc	Luminaire	E 1/1/2012
	ELE\	Luminaire safety cable 2012.DOC	Luminaire Safety Cable Assembly	E 1/1/2012
	ELE\	Protect Underpass LightingSystem 2012.doc	Protect & Maintain Underpass Luminaires	E 1/1/2012
X	ELE\	Raceway Exposed 2012.DOC	Exposed Raceways	E 1/1/2012
X	ELE\	Raceway Underground 2012.DOC	Underground Raceways	E 1/1/2012
X	ELE\	Service Connection 2012.doc	Electric Utility Service Connection (ComEd)	E 1/1/2012
X	ELE\	Service Install 2012.doc	Electric Service Installation	E 1/1/2012
	ELE\	Temp light SingleLaneStg 2012.doc	Temporary Lighting For Single Lane Staging	E 01/01/2012
	ELE\	Temp pole install 2012.DOC	Temporary Wood Pole, Install Only	E 1/1/2012
X	ELE\	Unit Duct 2012.DOC	Unit Duct	E 1/01/2012
X	ELE\	Wire Cable 2012.doc	Wire and Cable	E 1/1/2012
		Guide Bridge Special Provisions		
	GBS\	gbsp04.doc	Polymer Modified Portland Cement Mortar	E 6/7/94 R 07/26/13
	GBS\	gbsp12.doc	Drainage System	E 06/10/94 R 01/01/07
	GBS\	gbsp13.doc	Floating Bearings	E 10/13/88 R 10/30/12
	GBS\	gbsp14.doc	Jack and Remove Existing Bearings	E 04/20/94 R 01/01/07
	GBS\	gbsp15.doc	Three Sided Precast Concrete Structure	E 07/12/94 R 10/15/11
	GBS\	gbsp16.doc	Jacking Existing Superstructure	E 01/11/93 R 01/01/07
	GBS\	gbsp17.doc	Bonded Preformed Joint Seal	E 07/12/94 R 01/01/07
	GBS\	gbsp18.doc	Modular Expansion Joint	E 5/19/94 R 07/26/13
	GBS\	gbsp21.doc	Cleaning and Painting Contact Surfaces of Existing Steel Structures	E 05/15/91 R 05/18/11
	GBS\	GBSP25.doc	Cleaning and Painting Existing Steel Structures	E 10/02/01 R 04/19/12

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

	GBS\	GBSP26.doc	Containment and Disposal of Lead Paint Cleaning Residues	E 10/02/01 R 04/30/10
	GBS\	gbsp28.doc	Deck Slab Repair	E 05/15/95 R 10/15/11
	GBS\	gbsp29.doc	Bridge Deck Microsilica Concrete Overlay	E 05/15/95 R 10/30/12
	GBS\	GBSP30.doc	Bridge Deck Latex Concrete Overlay	E 05/15/95 R 01/18/11
	GBS\	gbsp31.doc	Bridge Deck HRM Concrete Overlay	E 01/21/00 R 10/30/12
	GBS\	gbsp32.doc	Temporary Sheet Piling	E 090/2/94 R 01/31/12
	GBS\	gbsp33.doc	Pedestrian Truss Superstructure	E 01/13/98 R 08/17/12
	GBS\	GBSP34.doc	Concrete Wearing Surface	E 06/23/94 R 01/31/12
	GBS\	GBSP35.doc	Silicone Bridge Joint Sealer	E 08/01/95 R 10/15/11
	GBS\	GBSP38.doc	Mechanically Stabilized Earth Retaining Walls	E 02/03/99 R 07/26/13
	GBS\	GBSP42.doc	Drilled Soldier Pile Retaining Wall	E 09/20/01 R 08/17/12
	GBS\	GBSP43.doc	Driven Soldier Pile Retaining wall	E 11/13/02 R 08/17/12
	GBS\	GBSP44.doc	Temporary Soil Retention System	E 12/30/02 R 05/11/09
	GBS\	GBSP45.doc	Bridge Deck Thin Polymer Overlay	E 05/07/97 R 01/01/07
	GBS\	GBSP46.doc	Geotextile Retaining walls	E 09/19/03 R 07/26/13
	GBS\	GBSP47.doc	High Performance Concrete Structures	E 08/05/02 R 01/01/07
	GBS\	GBSP51.doc	Pipe Underdrains for Structures	E 05/17/00 R 01/22/10
	GBS\	GBSP53.doc	Structural Repair of Concrete	E 03/15/06 R 07/26/13
	GBS\	GBSP55.doc	Erection of Curved Steel Structures	E 06/01/07
	GBS\	GBSP56.doc	Setting Piles In Rock	E 11/14/96 R 04/19/07
	GBS\	GBSP57.doc	Temporary Mechanically Stabilized Earth Retaining Walls	E 01/06/03 R 07/26/13
	GBS\	GBSP59.doc	Diamond Grinding and Surface Testing Bridge Sections	E 12/06/04 R 07/09/08
	GBS\	GBSP60.doc	Containment and Disposal of Non Lead Paint Cleaning Residues	E 11/25/04 R 03/06/09
	GBS\	GBSP61.doc	Slipform Parapet	E 06/01/07 R 08/17/12
	GBS\	GBSP62.doc	Concrete Deck Beams	E 06/13/08 R 10/09/09
	GBS\	GBSP64.doc	Segmental Concrete Block Wall	E 01/07/99 R 10/30/12
	GBS\	GBSP65.doc	Precast Modular Retaining Wall	E 03/19/01 R 10/30/12
	GBS\	gbsp66.doc	Wave Equation Analysis of Piles	E 11/14/08
	GBS\	gbsp67.doc	Structural Assessment Reports for Contractor's Means and Methods	E 03/06/09
	GBS\	GBSP70.doc	Braced Excavation	E 08/09/95 R 05/18/11
	GBS\	GBSP71.doc	Aggregate Column Ground Improvement	E 01/15/09 R 10/15/11
	GBS\	GBSP72.doc	Bridge Deck Fly Ash or Ground Granulated Blast-Furnace Concrete Overlay	E 01/18/11 R 10/15/11
	GBS\	GBSP73.doc	Cofferdams	E 10/15/11 R
	GBS\	GBSP74.doc	Permanent Steel Sheet Piling (LRFD)	E 01/31/12 R 08/17/12
	GBS\	GBSP75.doc	Bond Breaker for Prestressed Concrete Bulb-T Beams	E 04/19/12 R
	GBS\	GBSP76.doc	Granular Backfill for Structures	E 04/19/12 R 10/30/12
	GBS\	GBSP77.doc	Weep Hole Drains for Abutments, Wingwalls, Retaining Walls and Culverts	E 04/19/12 R10/22/13
	GBS\	GBSP78.doc	Bridge Deck Construction	E 10/22/13 R
	GBS\	index.doc	GBSP Check Sheet	E 01/17/14
Bridge and Roadway Maintenance Special Provisions				
	MNT1\	ADJRCK.doc	Adjust Rocker and Sole Plate	E 01/23/95 R 01/01/07
	MNT1\	APPR_SLAB_REM&REPL.doc	Approach Slab Removal & Replacement	E 12/28/01 R 01/01/07

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

	MNT1\	APSLRP.DOC	Approach Slab Repair	E 03/13/97 R 09/25/09
	MNT1\	Bmstrt.doc	Beam Straightening	E 12/06/94 R 01/01/07
	MNT1\	Br-Dk-Conc-Sealer.doc	Bridge Deck Concrete Sealer	E 06/17/10 R 07/01/12
	MNT1\	Brgpad.doc	Bearing Pad Adjustment	E 07/27/94 R 01/01/07
	MNT1\	Bridge_Drain_Sys_Repair.doc	Bridge Drainage System Repairs	E 11/16/10 R 09/15/11
	MNT1\	BRR.doc	Bridge Rail Removal	E 04/15/99 R 01/01/07
	MNT1\	Cleaning Drainage System.doc	Cleaning Drainage System	E 06/21/04 R 08/30/10
	MNT1\	Concscar.doc	Concrete Bridge Deck Scarification [w/new HMA overlay w/o WMS]	E 11/22/02 R 01/01/07
	MNT1\	CWS.DOC	Concrete Wearing Surface [Use on Slab Bridges - for PPC Dk Bms use GBSP34]	E 06/23/94 R 01/01/07
	MNT1\	Debris_Removal.doc	Debris Removal	E 06/27/02
	MNT1\	dowelrp.doc	Dowel Repair	E 07/27/94 R 01/01/07
	MNT1\	EPXINJ.DOC	Epoxy Injection	E 12/06/94 R 01/01/07
	MNT1\	Fldrex.doc	Floor Drain Extension	E 02/01/96 R 04/07/98
	MNT1\	Grade_Shape_Foreslope.doc	Grading And Shaping Foreslopes	E 04/01/08
	MNT1\	Groutrp.doc	Grout Repair	E 07/27/94 R 01/01/07
	MNT1\	heatscarify_Jan 1 2012.doc	Pavement Rehabilitation by Hot In-Place Recycling	E 07/11/03 R 01/01/12
	MNT1\	HMArm1.doc	Hot-Mix Asphalt Surface Removal Complete	E 12/08/93 R 01/01/07
	MNT1\	HMArm2.DOC	Hot-Mix Asphalt Surface Removal [Use w/ PPC Deck Beams]	E 07/27/94 R 01/01/07
	MNT1\	HMArm3.doc	Hot-Mix Asphalt Surface Removal (Deck)	E 04/29/96 R 01/01/07
	MNT1\	HMArm4.doc	Hot-Mix Asphalt Surface Removal [Use w/Deck Slab Repairs]	E 07/27/94 R 01/01/07
	MNT1\	Jckcrb.doc	Jacking and Cribbing	E 10/05/99 R 01/01/07
	MNT1\	JKRPBR.DOC	Jack and Reposition Bearings	E 12/15/93 R 07/15/96
	MNT1\	Keep_Toll_Open_To_Traffic.doc	Keeping the Tollway Open to Traffic	E 03/22/96 R 10/12/10
	MNT1\	Keywyrp.doc	Keyway Repair	E 07/27/94 R 08/12/11
	MNT1\	NIGHT_WZ_LIGHT(D1).doc	Nighttime Work Zone Lighting (D1)	E 11/01/08 R 06/15/10
	MNT1\	Paint Warranty7.doc	Warranty for Cleaning and Painting Steel Structures	E 03/03/00 R 11/24/04
	MNT1\	PINLNK.DOC	Pin and Link Replacement	E 11/20/95 R 06/20/96
	MNT1\	PINRR.DOC	Pin Replacement	E 06/11/96 R 06/20/96
	MNT1\	plexdd.doc	Plug Existing Deck Drains	E 11/06/96 R 01/01/07
	MNT1\	PPROSH.DOC	Permanent Protective Shield System	E 10/03/96 R 06/27/08
	MNT1\	PrGrAng.doc	Pressure Grouting Angles	E 06/01/93 R 01/01/07
	MNT1\	reancr.doc	Re-Anchor Existing Expansion Joint Angles	E 02/20/98
	MNT1\	REBAR.DOC	Cleaning and Painting Exposed Rebar	E 03/20/97 R 01/01/07
	MNT1\	RECIBm.doc	Removal of Existing Concrete I-Beam	E 07/09/98 R 05/05/99
	MNT1\	REXPPCDB.doc	Removal of Existing Precast Prestressed Concrete Deck Beams	E 10/28/98 R 01/01/07
	MNT1\	RREXRL.DOC	Removing and Re-Erecting Existing Railing	E 10/31/96 R 01/01/07
	MNT1\	Scarify.doc	Concrete Bridge Deck Scarification	E 05/15/95 R 01/01/07
	MNT1\	SteelRem.doc	Structural Steel Removal	E 10/03/97 R 01/01/07
	MNT1\	steelrep.doc	Structural Steel Repair	E 12/15/00 R 01/01/07
	MNT1\	STRBM.DOC	Straighten Bent Members	E 01/23/97 R 06/19/06
	MNT1\	StructRepConcr(SP).doc	Structural Repair Of Concrete (Special)	E 04/02/07
	MNT1\	Tmpsh1.doc	Temporary Shoring & Cribbing [when req'd for damaged beam replacement; requires SE]	E 06/16/92 R 03/11/03
	MNT1\	Tmpsh1a.doc	Temporary Shoring & Cribbing [when "May be req'd" for or Day Labor beam replacement; No SE req'd]	E 06/16/92 R 04/22/03
	MNT1\	Tmpsh2.doc	Temporary Shoring and Cribbing [for use w/longitudinal joint. closure on slab bridges]	E 07/27/94 R 03/11/03

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

	MNT1\	TMPSH3.DOC	Temporary Shoring and Cribbing [Use during Pile Repair]	E 07/16/92 R 03/11/03
	MNT1\	TMPSH4.DOC	Temporary Shoring and Cribbing [Use to support Beams over substructure repair]	E 7/16/92 R 10/17/11
	MNT1\	TMPSH5.DOC	Temporary Shoring and Cribbing [Support Slab Bridge during Joint reconstruction]	E 07/16/92 R 03/11/03
	MNT1\	TMPSH6.DOC	Temporary Shoring and Cribbing [support effected beam during beam end repairs]	E 10/22/04 R 11/09/04
	MNT1\	TMPSLB.DOC	Temporary Slab Support System [use with beam replacement]	E 07/27/94 R 03/11/03
	MNT1\	TMPSP1.DOC	Temporary Support System [Use for Pin & Link Replacement]	E 11/20/95 R 04/04/97
	MNT1\	TMPSP2.DOC	Temporary Support System [Use if Pins over RR]	E 11/20/95 R 03/11/03
	MNT1\	Work_Zone_Traff_Ctrl(D1-M).doc	Work Zone Traffic Control (D-1 Maintenance)	E 05/30/96 R 06/15/10
	MNT2\	COARSE SAND PLACEMENT.doc	Coarse Sand Placement	E 02/07/07
	MNT2\	GENERAL REQUIREMENTS FOR WEED CONTROL SPRAYING.doc	General Requirements For Weed Control Spraying	E 02/07/07
	MNT2\	MULCH PLACEMENT FOR WOODY PLANTS.doc	Mulch Placement For Woody Plants	E 02/07/07
	MNT2\	Pruning-safety.doc	Pruning For Safety And Equipment Clearance	E 10/31/06
	MNT2\	SELECTIVE CLEARING.doc	Selective Clearing	E 02/08/07
	MNT2\	WEED CONTROL PRE-EMERGENT GRANULAR HERBICIDE.doc	Weed Control, Pre-Emergent Granular Herbicide	E 07/29/02 R 02/07/07
	MNT2\	WEED CONTROL, NON-SELECTIVE AND NON-RESIDUAL.doc	Weed Control, Non-Selective And Non-Residual	E 02/07/07
	MNT2\	WEED CONTROL, TEASEL (POUND).doc	Weed Control, Teasel (Pound)	E 02/07/07
		Bureau of Traffic Special Provisions		
	TRF\	7030001T.DOC	Type III Temporary Tape For Wet Conditions	E 02/01/11
	TRF\	8500002T.DOC	Full-Actuated Controller And Cabinet (Special)	E 1/1/02 Rev 1/1/07
	TRF\	8500003T.DOC	Master Controller (Special)	E 01/01/97 R 01/01/07
	TRF\	8500004T.DOC	Full-Actuated Controller (Special)	E 9/26/95 Rev 1/1/07
	TRF\	8500005T.DOC	Modify Existing Type "D" Foundation	E 01/01/97 R 01/01/07
	TRF\	8500006T.DOC	Rebuild Existing Handhole	E 01/01/97 R 01/01/07
	TRF\	8500007T.DOC	Rebuild Existing Handhole To Heavy-Duty Handhole	E 01/01/97 R 01/01/07
	TRF\	8500008T.DOC	Relocate Existing Emergency Vehicle Priority System, Detector Unit	E 10/01/97 R 01/01/07
	TRF\	8500009T.DOC	Confirmation Beacon	E 01/01/02 R 01/01/07
	TRF\	8500010T.DOC	Relocate Existing Emergency Vehicle Priority System, Phasing Unit	E 01/01/02 R 01/01/07
	TRF\	8500011T.DOC	Detector Loop Replacement/ Installation On Resurfacing/Patching	E 01/01/85 R 01/01/07
	TRF\	8500012T.DOC	Flashing Beacon Installation	E 01/01/07
	TRF\	8500014T.DOC	RR Full-Actuated Controller And Cabinet (Special)	E 1/1/07
	TRF\	8500015T.DOC	RR Full-Actuated Controller And Cabinet	E 1/1/07
	TRF\	9010001X.DOC	Keeping The Expressway Open To Traffic	E 03/22/96 R 06/17/13
	TRF\	9010002X.DOC	Failure To Open Traffic Lanes To Traffic	E 03/22/96 R 02/09/05
	TRF\	9010003X.doc	Traffic Control And Protection (Expressways)	E 03/08/96 R 10/11/13
	TRF\	9010004X.DOC	Traffic Control Surveillance (Expressways)	E 10/25/95 R 01/09/98

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

	TRF\	9010005X.DOC	Traffic Control Surveillance (Special)	E 10/25/95 R 01/01/07
	TRF\	9010006X.DOC	Temporary Information Signing	E 11/13/96 R 01/02/07
	TRF\	9010009X.DOC	Traffic Control For Work Zone Areas	E 09/14/95 R 01/01/07
	TRF\	D1 TS Specs 2012.doc	Traffic Signal Specifications (Dist. 1)	E 01/01/02 R 01/01/12
	TRF\	Hot Spray Thermo.doc	45 Mil Hot Spray Thermoplastic Pavement Marking	E 02/28/94 R 12/18/12
	TRF\	Keep_Arterials_Open_to_Traffic.doc	Keeping Arterial Roadways Open to Traffic	E 01/22/03 R 01/01/07
	TRF\	Sign Shop Drawing Submittal.doc	Sign Shop Drawing Submittal	E 01/01/13

FOLLOWING ARE THE CURRENT BDE SPECIAL PROVISIONS ISSUED BY THE CENTRAL BUREAU OF DESIGN AND ENVIRONMENT. PRELIMINARY AND FINAL SPECIAL PROVISIONS THAT ARE DISTRIBUTED FOR DISTRICT OR OUTSIDE AGENGY REVIEW SHOULD INCLUDE A COPY OF EACH APPLICABLE BDE SPECIAL PROVISION. FINAL SUBMITTAL TO THE CENTRAL OFFICE SHOULD ONLY INCLUDE THE BDE SPECIAL PROVISION CHECK SHEET WITH THE APPLICABLE SPECIAL PROVISIONS CHECKED.

	ZD&E\	20338.doc	TRAINING SPECIAL PROVISIONS	E 10/15/75
	ZD&E\	3426I.doc	RAILROAD PROTECTIVE LIABILITY INSURANCE	E 12/01/86 R 01/01/06
	ZD&E\	5026I.doc	BUILDING REMOVAL - CASE I (NON-FRIABLE AND FRIABLE ASBESTOS ABATEMENT)	E 09/01/90 R 04/01/10
	ZD&E\	5048I.doc	BUILDING REMOVAL - CASE II (NON-FRIABLE ASBESTOS ABATEMENT)	E 09/01/90 R 04/01/10
	ZD&E\	5049I.doc	BUILDING REMOVAL - CASE III (FRIABLE ASBESTOS ABATEMENT)	E 09/01/90 R 04/01/10
	ZD&E\	5053I.doc	BUILDING REMOVAL - CASE IV (NO ASBESTOS)	E 09/01/90 R 04/01/10
	ZD&E\	80029.doc	DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION	E 09/01/00 R 08/02/11
	ZD&E\	80045.doc	MATERIAL TRANSFER DEVICE	E 06/15/99 R 01/01/09
	ZD&E\	80071.doc	WORKING DAYS	E 01/01/02
	ZD&E\	80099.doc	Accessible Pedestrian Signals (APS)	E 04/01/03 R 01/01/14
	ZD&E\	80127.doc	STEEL COST ADJUSTMENT	E 04/02/04 R 04/01/09
	ZD&E\	80157.doc	RAILROAD PROTECTIVE LIABILITY INSURANCE (5 AND 10)	E 01/01/06
	ZD&E\	80165.doc	MOISTURE CURED URETHANE PAINT SYSTEM	E 11/01/06 R 01/01/10
	ZD&E\	80173.doc	BITUMINOUS MATERIALS COST ADJUSTMENTS	E 11/2/06 R 08/01/13
	ZD&E\	80192.doc	AUTOMATED FLAGGER ASSISTANCE DEVICES	E 01/01/08
	ZD&E\	80198.doc	COMPLETION DATE (VIA CALENDAR DAYS)	E 04/01/08
	ZD&E\	80199.doc	COMPLETION DATE (VIA CALENDAR DAYS) PLUS WORKING DAYS	E 04/01/08
	ZD&E\	80225.doc	TEMPORARY RAISED PAVEMENT MARKER	E 01/01/09
	ZD&E\	80229.doc	FUEL COST ADJUSTMENT	E 04/01/09 R 07/01/09
	ZD&E\	80240.doc	ABOVE GRADE INLET PROTECTION	E 07/01/09 R 01/01/12
	ZD&E\	80241.doc	BRIDGE DEMOLITION DEBRIS	E 07/01/09
	ZD&E\	80246.doc	HOT-MIX ASPHALT - DENSITY TESTING OF LONGITUDINAL JOINTS	E 01/01/10 R 04/01/2012
	ZD&E\	80254.doc	PAVEMENT PATCHING	E 01/01/10
	ZD&E\	80261.doc	Construction Air Quality - Diesel Retrofit	E 06/01/10 R 01/01/14
	ZD&E\	80265.doc	FRICTION AGGREGATE	E 01/01/11
	ZD&E\	80274.doc	AGGREGATE SUBGRADE IMPROVEMENT	E 04/01/12 R 01/01/13
	ZD&E\	80277.doc	Concrete Mix Design - Department Provided	E 01/01/12 R 01/01/14
	ZD&E\	80281.doc	Quality Control/Quality Assurance of Concrete Mixtures	E 01/01/12 R 01/01/14
	ZD&E\	80283.doc	REMOVAL DISPOSAL OF REGULATED	E 01/01/12 R 11/02/12

SPECIAL PROVISIONS CHECK LIST
Generated - 10/4/13 Revised – 11/05/13

Designer: _____ **FAP:** _____
Contract No.: _____ **Section:** _____
County: _____

			SUBSTANCES (BDE)	
	ZD&E\	80288.doc	WARM MIX ASPHALT	E 01/01/12 R 11/01/13
	ZD&E\	80289.doc	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING	E 01/01/12
	ZD&E\	80292.doc	COARSE AGGREGATE IN BRIDGE APPROACH SLABS/FOOTINGS (BDE)	E 04/01/12 R 04/01/13
	ZD&E\	80293.doc	CONCRETE BOX CULVERTS WITH SKEWS > 30 DEGREES AND DESIGN FILLS ≤ 5 FEET	E 04/01/12
	ZD&E\	80294.doc	CONCRETE BOX CULVERTS WITH SKEWS ≤ 30 DEGREES REGARDLESS OF DESIGN FILL AND SKEWS > 30 DEGREES WITH DESIGN FILLS > 5 FEET	E 04/01/12
	ZD&E\	80298.doc	PAVEMENT MARKING TAPE TYPE IV	E 04/01/12
	ZD&E\	80300.doc	PREFORMED PLASTIC PAVEMENT MARKING TYPE D - INLAID	E 04/01/12
	ZD&E\	80301.doc	TRACKING THE USE OF PESTICIDES	E 08/01/12
	ZD&E\	80302.doc	WEEKLY DBE TRUCKING REPORTS	E 06/02/12
	ZD&E\	80303.doc	GRANULAR MATERIALS	E 11/01/12
	ZD&E\	80304.doc	GROOVING FOR RECESSED PAVEMENT MARKINGS	E 11/01/12 R 01/01/13
	ZD&E\	80306.doc	RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES	E 11/01/12 R 11/01/13
	ZD&E\	80307.doc	SEEDING	E 11/01/12
	ZD&E\	80310.doc	COATED GALVANIZED STEEL CONDUIT	E 01/01/13
	ZD&E\	80311.doc	CONCRETE END SECTIONS FOR PIPE CULVERTS	E 01/01/13
	ZD&E\	80315.doc	INSERTION LINING OF CULVERTS	E 01/01/13 R 11/01/13
	ZD&E\	80317.doc	SURFACE TESTING OF HOT-MIX ASPHALT OVERLAYS	E 01/01/13
	ZD&E\	80318.doc	TRAVERSABLE PIPE GRATE	E 01/01/13 R 04/01/13
	ZD&E\	80319.doc	REMOVAL AND DISPOSAL OF SURPLUS MATERIALS	E 11/02/12
	ZD&E\	80322.doc	HOT-MIX ASPHALT – MIXTURE DESIGN COMPOSITION AND VOLUMETRIC REQUIREMENTS	E 11/01/13
	ZD&E\	80323.doc	HOT-MIX ASPAHLT – MIXTURE DESIGN VERIFICATION AND PRODUCTION	E 11/01/13
	ZD&E\	80324.doc	LRFD PIPE CULVERT BURIAL TABLES	E 11/01/13
	ZD&E\	80325.doc	LRFD STORM SEWER BURIAL TABLES	E 11/01/13
	ZD&E\	80326.doc	PORTLAND CEMENT CONCRETE EQUIPMENT	E 11/01/13
	ZD&E\	80327.doc	REINFORCEMENT BARS	E 11/01/13
	ZD&E\	80328.doc	Progress Payments	E 11/02/13
	ZD&E\	80329.doc	Glare Screen	E 01/01/14
	ZD&E\	80330.doc	Pavement Marking for Bike Symbol	E 01/01/14
	ZD&E\	80331.doc	Payrolls and Payroll Records	E 01/01/14
	ZD&E\	80332.doc	Portland Cement Concrete - Curing of Abutments and Piers	E 01/01/14
	ZD&E\	80333.doc	Traffic Control Setup and Removal Freeway/Expressway	E 01/01/14

Electric Utility Service Connection (ComEd) (DISTRICT ONE)
Effective: January 1, 2012

Description. This item shall consist of payment for work performed by ComEd in providing or modifying electric service as indicated. THIS MAY INVOLVE WORK AT MORE THAN ONE ELECTRIC SERVICE. For summary of the Electrical Service Drop Locations see the schedule contained elsewhere herein.

CONSTRUCTION REQUIREMENTS

General. It shall be the Contractor's responsibility to contact ComEd. The Contractor shall coordinate his work fully with the ComEd both as to the work required and the timing of the installation. No additional compensation will be granted under this or any other item for extra work caused by failure to meet this requirement. **Please contact ComEd, New Business Center Call Center, at 866 NEW ELECTRIC (1-866-639-3532) to begin the service connection process. The Call Center Representatives will create a work order for the service connection. The representative will ask the requestor for information specific to the request. The representative will assign the request based upon the location of project.**

The Contractor should make particular note of the need for the earliest attention to arrangements with ComEd for service. In the event of delay by ComEd, no extension of time will be considered applicable for the delay unless the Contractor can produce written evidence of a request for electric service within 30 days of execution.

Method Of Payment. The Contractor will be reimbursed to the exact amount of money as billed by ComEd for its services. Work provided by the Contractor for electric service will be paid separately as described under ELECTRIC SERVICE INSTALLATION. No extra compensation shall be paid to the Contractor for any incidental materials and labor required to fulfill the requirements as shown on the plans and specified herein.

For bidding purposes, this item shall be estimated as $500.00

Basis Of Payment. This work will be paid for at the contract lump sum price for **ELECTRIC UTILITY SERVICE CONNECTION** which shall be reimbursement in full for electric utility service charges.

Designers Note: The estimate of cost of service connections for bidding purposes shall be provided by the Designer or Design Consultant.

FINE AGGREGATE FOR HOT- MIX ASPHALT (HMA) (D-1)
Effective: May 1, 2007
Revised: January 1, 2012

Revise Article 1003.03 (c) of the Standard Specifications to read:

"(c) Gradation. The fine aggregate gradation for all HMA shall be FA1, FA 2, FA 20, FA 21 or FA 22. When Reclaimed Asphalt Pavement (RAP) is incorporated in the HMA design, the use of FA 21 Gradation will not be permitted.

FRICTION SURFACE AGGREGATE (D1)

Effective: January 1, 2011
Revised: November 1, 2013

Revise Article 1004.01(a)(4) of the Standard Specifications to read:

"(4) Crushed Stone. Crushed stone shall be the angular fragments resulting from crushing undisturbed, consolidated deposits of rock by mechanical means. Crushed stone shall be divided into the following, when specified.

a. Carbonate Crushed Stone. Carbonate crushed stone shall be either dolomite or limestone. Dolomite shall contain 11.0 percent or more magnesium oxide (MgO). Limestone shall contain less than 11.0 percent magnesium oxide (MgO).

b. Crystalline Crushed Stone. Crystalline crushed stone shall be either metamorphic or igneous stone, including but is not limited to, quartzite, granite, rhyolite and diabase."

Revise Article 1004.03(a) of the Standard Specifications to read:

"**1004.03 Coarse Aggregate for Hot-Mix Asphalt (HMA).** The aggregate shall be according to Article 1004.01 and the following revisions.

(a) Description. The coarse aggregate for HMA shall be according to the following table.

Use	Mixture	Aggregates Allowed
Class A	Seal or Cover	<u>Allowed Alone or in Combination:</u> Gravel Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag Crushed Concrete

Use	Mixture	Aggregates Allowed	
HMA All Other	Shoulders	<u>Allowed Alone or in Combination:</u> Gravel Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) [1/] Crushed Steel Slag[1/] Crushed Concrete	
HMA High ESAL Low ESAL	C Surface IL-12.5,IL-9.5, or IL-9.5L	<u>Allowed Alone or in Combination:</u> Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) [1/] Crushed Steel Slag[1/] Crushed Concrete	
HMA High ESAL	D Surface IL-12.5 or IL-9.5	<u>Allowed Alone or in Combination:</u> Crushed Gravel Carbonate Crushed Stone (other than Limestone) Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) [1/] Crushed Steel Slag[1/] Crushed Concrete	
		<u>Other Combinations Allowed:</u>	
		Up to...	*With...*
		25% Limestone	Dolomite
		50% Limestone	Any Mixture D aggregate other than Dolomite
		75% Limestone	Crushed Slag (ACBF)[1/] or Crushed Sandstone

Use	Mixture	Aggregates Allowed	
HMA High ESAL	F Surface IL-12.5 or IL-9.5	<u>Allowed Alone or in Combination:</u> Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF)[1/] Crushed Steel Slag[1/] No Limestone or no Crushed Gravel alone.	
		<u>Other Combinations Allowed:</u>	
		Up to...	*With...*
		50% Crushed Gravel, or Dolomite	Crushed Sandstone, Crushed Slag (ACBF)[1/], Crushed Steel Slag[1/], or Crystalline Crushed Stone
HMA High ESAL	SMA Ndesign 80 Surface	Crystalline Crushed Stone Crushed Sandstone Crushed Steel Slag	

1/ When either slag is used, the blend percentages listed shall be by volume.

Add the following to Article 1004.03 (b):

" When using Crushed Concrete, the quality shall be determined as follows. The Contractor shall obtain a representative sample from the stockpile, witnessed by the Engineer, at a frequency of 2500 tons (2300 metric tons). The sample shall be a minimum of 50 lb (25 kg). The Contractor shall submit the sample to the District Office. The District will forward the sample to the BMPR Aggregate Lab for MicroDeval Testing, according to Illinois Modified AASHTO T 327. A maximum loss of 15.0 percent by weight will be applied for acceptance. The stockpile shall be sealed until test results are complete and found to meet the specifications above."

General Electrical Requirements (DISTRICT ONE)
Effective: January 1, 2012

Add the following to Article 801 of the Standard Specifications:

"Maintenance transfer and Preconstruction Inspection:

General. Before performing any excavation, removal, or installation work (electrical or otherwise) at the site, the Contractor shall request a maintenance transfer and preconstruction site inspection, to be held in the presence of the Engineer and a representative of the party or parties responsible for maintenance of any lighting and/or traffic control systems which may be affected by the work. The request for the maintenance transfer and preconstruction inspection shall be made no less than seven (7) calendar days prior to the desired inspection date. The maintenance transfer and preconstruction inspection shall:

Establish the procedures for formal transfer of maintenance responsibility required for the construction period.

Establish the approximate location and operating condition of lighting and/or traffic control systems which may be affected by the work

Marking of Existing Cable Systems. The party responsible for maintenance of any existing lighting and/or traffic control systems at the project site will, at the Contractor's request, mark and/or stake, once per location, all underground cable routes owned or maintained by the State. A project may involve multiple "locations" where separated electrical systems are involved (i.e. different controllers). The markings shall be taken to have a horizontal tolerance of at least 304.8 mm (one (1) foot) to either side.. The request for the cable locations and marking shall be made at the same time the request for the maintenance transfer and preconstruction inspection is made. The Contractor shall exercise extreme caution where existing buried cable runs are involved. The markings of existing systems are made strictly for assistance to the Contractor and this does not relieve the Contractor of responsibility for the repair or replacement of any cable run damaged in the course of his work, as specified elsewhere herein. Note that the contractor shall be entitled to only one request for location marking of existing systems and that multiple requests may only be honored at the contractor's expense. No locates will be made after maintenance is transferred, unless it is at the contractor's expense.

Condition of Existing Systems. The Contractor shall conduct an inventory of all existing electrical system equipment within the project limits, which may be affected by the work, making note of any parts which are found broken or missing, defective or malfunctioning. Megger and load readings shall be taken for all

existing circuits which will remain in place or be modified. If a circuit is to be taken out in its entirety, then readings do not have to be taken. The inventory and test data shall be reviewed with and approved by the Engineer and a record of the inventory shall be submitted to the Engineer for the record. Without such a record, all systems transferred to the Contractor for maintenance during construction shall be returned at the end of construction in complete, fully operating condition."

Add the following to the 1st paragraph of Article 801.05(a) of the Standard Specifications:

"Items from multiple disciplines shall not be combined on a single submittal and transmittal. Items for lighting, signals, surveillance and CCTV must be in separate submittals since they may be reviewed by various personnel in various locations."

Revise the second sentence of the 5th paragraph of Article 801.05(a) of the Standard Specifications to read:

"The Engineer will stamp the submittals indicating their status as 'Approved', 'Approved as Noted', 'Disapproved', or 'Information Only'.

Revise the 6th paragraph of Article 801.05(a) of the Standard Specifications to read:

"Resubmittals. All submitted items reviewed and marked 'Approved as Noted', or 'Disapproved' are to be resubmitted in their entirety with a disposition of previous comments to verify contract compliance at no additional cost to the state unless otherwise indicated within the submittal comments."

Revise Article 801.11(a) of the Standard Specifications to read:

"Lighting Operation and Maintenance Responsibility. The scope of work shall include the assumption of responsibility for the continuing operation and maintenance the of existing, proposed, temporary, sign and navigation lighting, or other lighting systems and all appurtenances affected by the work as specified elsewhere herein. Maintenance of lighting systems is specified elsewhere and will be paid for separately

Energy and Demand Charges. The payment of basic energy and demand charges by the electric utility for existing lighting which remains in service will continue as a responsibility of the Owner, unless otherwise indicated. Unless otherwise indicated or required by the Engineer duplicate lighting systems (such as temporary lighting and proposed new lighting) shall not be operated simultaneously at the Owner's expense and lighting systems shall not be kept in operation during long daytime periods at the Owner's expense. Upon written authorization from the

Engineer to place a proposed new lighting system in service, whether the system has passed final acceptance or not, (such as to allow temporary lighting to be removed), the Owner will accept responsibility for energy and demand charges for such lighting, effective the date of authorization. All other energy and demand payments to the utility shall be the responsibility of the Contractor until final acceptance."

Add the following to Section 801 of the Standard Specifications:

"Lighting Cable Identification. Each wire installed shall be identified with its complete circuit number at each termination, splice, junction box or other location where the wire is accessible."

"Lighting Cable Fuse Installation. Standard fuse holders shall be used on non-frangible (non-breakaway) light pole installations and quick-disconnect fuse holders shall be used on frangible (breakaway) light pole installations. Wires shall be carefully stripped only as far as needed for connection to the device. Over-stripping shall be avoided. An oxide inhibiting lubricant shall be applied to the wire for minimum connection resistance before the terminals are crimped-on. Crimping shall be performed in accordance with the fuse holder manufacturer's recommendations. The exposed metal connecting portion of the assembly shall be taped with two half-lapped wraps of electrical tape and then covered by the specified insulating boot. The fuse holder shall be installed such that the fuse side is connected to the pole wire (load side) and the receptacle side of the holder is connected to the line side."

Revise the 2nd paragraph of Article 801.16 of the Standard Specifications to read:

"When the work is complete, and seven days before the request for a final inspection, the full-size set of contract drawings. Stamped "RECORD DRAWINGS", shall be submitted to the Engineer for review and approval and shall be stamped with the date and the signature of the Contractor's supervising Engineer or electrician. The record drawings shall be submitted in PDF format on CDROM as well as hardcopy for review and approval. In addition to the record drawings, copies of the final catalog cuts which have been Approved or Approved as Noted shall be submitted in PDF format along with the record drawings. The PDF files shall clearly indicate either by filename or PDF table of contents the respective pay item number. Specific part or model numbers of items which have been selected shall be clearly visible."

Add the following to Article 801.16 of the Standard Specifications:

"In addition to the specified record drawings, the Contactor shall record GPS coordinates of the following electrical components being installed, modified or being affected in other ways by this contract:

- Last light pole on each circuit
- Handholes
- Conduit roadway crossings
- Controllers
- Control Buildings
- Structures with electrical connections, i.e. DMS, lighted signs.
- Electric Service locations
- CCTV Camera installations
- Fiber Optic Splice Locations

Datum to be used shall be North American 1983.

Data shall be provided electronically and in print form. The electronic format shall be compatible with MS Excel. Latitude and Longitude shall be in decimal degrees with a minimum of 6 decimal places. Each coordinate shall have the following information:

1. Description of item
2. Designation or approximate station if the item is undesignated
3. Latitude
4. Longitude

Examples:

Equipment Description	Equipment Designation	Latitude	Longitude
CCTV Camera pole	ST42	41.580493	-87.793378
FO mainline splice handhole	HHL-ST31	41.558532	-87.792571
Handhole	HH at STA 234+35	41.765532	-87.543571
Electric Service	Elec Srv	41.602248	-87.794053
Conduit crossing	SB IL83 to EB I290 ramp SIDE A	41.584593	-87.793378
Conduit crossing	SB IL83 to EB I290 ramp SIDE B	41.584600	-87.793432
Light Pole	DA03	41.558532	-87.792571
Lighting Controller	X	41.651848	-87.762053
Sign Structure	FGD	41.580493	-87.793378
Video Collection Point	VCP-IK	41.558532	-87.789771
Fiber splice connection	Toll Plaza34	41.606928	-87.794053

Prior to the collection of data, the contractor shall provide a sample data collection of at least six data points of known locations to be reviewed and verified by the Engineer to be accurate within 100 feet. Upon verification, data collection can begin. Data collection can be made as construction progresses, or can be collected after all items are installed. If the data is unacceptable the contractor shall make corrections to the data collection equipment and or process and submit the data for review and approval as specified.

Accuracy. Data collected is to be mapping grade. A handheld mapping grade GPS device shall be used for the data collection. The receiver shall support

differential correction and data shall have a minimum 5 meter accuracy after post processing.

GPS receivers integrated into cellular communication devices, recreational and automotive GPS devices are not acceptable.

The GPS shall be the product of an established major GPS manufacturer having been in the business for a minimum of 6 years."

GROUND TIRE RUBBER (GTR) MODIFIED ASPHALT BINDER (D-1)
Effective: June 26, 2006
Revised: January 1, 2013

Add the following to the end of article 1032.05 of the Standard Specifications:

"(c) Ground Tire Rubber (GTR) Modified Asphalt Binder. A quantity of 10.0 to 14.0 percent GTR (Note 1) shall be blended by dry unit weight with a PG 64-28 to make a GTR 70-28 or a PG 58-28 to make a GTR 64-28. The base PG 64-28 and PG 58-28 asphalt binders shall meet the requirements of Article 1032.05(a). Compatible polymers may be added during production. The GTR modified asphalt binder shall meet the requirements of the following table.

Test	Asphalt Grade GTR 70-28	Asphalt Grade GTR 64-28
Flash Point (C.O.C.), AASHTO T 48, °F (°C), min.	450 (232)	450 (232)
Rotational Viscosity, AASHTO T 316 @ 275 °F (135 °C), Poises, Pa·s, max.	30 (3)	30 (3)
Softening Point, AASHTO T 53, °F (°C), min.	135 (57)	130 (54)
Elastic Recovery, ASTM D 6084, Procedure A (sieve waived) @ 77 °F, (25 °C), aged, ss, 100 mm elongation, 5 cm/min., cut immediately, %, min.	65	65

Note 1. GTR shall be produced from processing automobile and/or light truck tires by the ambient grinding method. GTR shall not exceed 1/16 in. (2 mm) in any dimension and shall contain no free metal particles or other materials. A mineral powder (such as talc) meeting the requirements of AASHTO M 17 may be added, up to a maximum of four percent by weight of GTR to reduce sticking and caking of the GTR particles. When tested in accordance with Illinois modified AASHTO T 27, *a* 50 g sample of the GTR shall conform to the following gradation requirements:

Sieve Size	Percent Passing
No. 16 (1.18 mm)	100
No. 30 (600 μm)	95 ± 5
No. 50 (300 μm)	> 20

Add the following to the end of Note 1. of article 1030.03 of the Standard Specifications:

"A dedicated storage tank for the Ground Tire Rubber (GTR) modified asphalt binder shall be provided. This tank must be capable of providing continuous mechanical mixing throughout by continuous agitation and recirculation of the asphalt binder to provide a uniform mixture. The tank shall be heated and capable of maintaining the temperature

of the asphalt binder at 300 °F to 350 °F (149 °C to 177 °C). The asphalt binder metering systems of dryer drum plants shall be calibrated with the actual GTR modified asphalt binder material with an accuracy of ± 0.40 percent."

Revise 1030.02(c) of the Standard Specifications to read:

"(c) RAP Materials (Note 3) .....1031"

Add the following note to 1030.02 of the Standard Specifications:

Note 3. When using reclaimed asphalt pavement and/or reclaimed asphalt shingles, the maximum asphalt binder replacement percentage shall be according to the most recent special provision for recycled materials.

HMA MIXTURE DESIGN REQUIREMENTS (D-1)

Effective: January 1, 2013
Revised: November 1, 2013

Revise Article 406.14(b) of the Standard Specifications to read.

"(b) If the HMA placed during the initial test strip (1) is determined to be unacceptable to remain in place by the Engineer, and (2) was not produced within 2.0 to 6.0 percent air voids or within the individual control limits of the JMF, the mixture and test strip will not be paid for and the mixture shall be removed at the Contractor's expense. An additional test strip and mixture will be paid for in full, if produced within 2.0 to 6.0 percent air voids and within the individual control limits of the JMF."

Revise Article 406.14(c) of the Standard Specifications to read.

"(c) If the HMA placed during the initial test strip (1) is determined to be unacceptable to remain in place by the Engineer, and (2) was produced within 2.0 to 6.0 percent air voids and within the individual control limits of the JMF, the mixture shall be removed. Removal will be paid in accordance to Article 109.04 of the Standard Specifications. This initial mixture and test strip will be paid for at the contract unit prices. The additional mixture will be paid for at the contract unit price, and any additional test strips will be paid for at one half the unit price of each test strip."

1) Design Composition and Volumetric Requirements

Revise the following table in Article 1030.01 of the Standard Specifications to read.

High ESAL	IL-25.0 binder; IL-19.0 binder; IL-12.5 surface; IL-9.5 surface; IL-4.75, SMA

Revise the following table in Article 1030.04(a)(1):

"(1) High ESAL Mixtures. The Job Mix Formula (JMF) shall fall within the following limits.

High ESAL, MIXTURE COMPOSITION (% PASSING) [1/]														
Sieve Size	IL-25.0 mm		IL-19.0 mm		IL-12.5 mm		IL-9.5 mm		IL-4.75 mm		SMA [4/] IL-12.5 mm		SMA [4/] IL-9.5 mm	
	Min	max	min	max	min	max	min	max	min	max	min	max	min	max
1 1/2 in (37.5 mm)		100												
1 in. (25 mm)	90	100		100										
3/4 in. (19 mm)		90	82	100		100						100		
1/2 in. (12.5 mm)	45	75	50	85	90	100		100		100	80	100		100
3/8 in. (9.5 mm)						89	90	100		100		65	90	100
#4 (4.75 mm)	24	42 [2/]	24	50 [2/]	28	65	32	69	90	100	20	30	36	50

#8 (2.36 mm)	16	31	20	36	28	48 3/	32	52 3/	70	90	16	24 5/	16	32
#16 (1.18 mm)	10	22	10	25	10	32	10	32	50	65				
#30 (600 μm)											12	16	12	18
#50 (300 μm)	4	12	4	12	4	15	4	15	15	30				
#100 (150 μm)	3	9	3	9	3	10	3	10	10	18				
#200 (75 μm)	3	6	3	6	4	6	4	6	7	9 6/	7.0	9.0 6/	7.5	9.5 6/
Ratio Dust/Asphalt Binder		1.0		1.0		1.0		1.0		1.0		1.5		1.5

1/ Based on percent of total aggregate weight.

2/ The mixture composition shall not exceed 40 percent passing the #4 (4.75 mm) sieve for binder courses with Ndesign ≥ 90.

3/ The mixture composition shall not exceed 44 percent passing the #8 (2.36 mm) sieve for surface courses with Ndesign ≥ 90.

4/ The maximum percent passing the 20 μm sieve shall be ≤ 3 percent.

5/ When establishing the Adjusted Job Mix Formula (AJMF) the #8 (2.36mm) sieve shall not be adjusted above 24 percent.

6/ Additional minus No. 200 (0.075 mm) material required by the mix design shall be mineral filler, unless otherwise approved by the Engineer."

Delete Article 1030.04(a)(4) of the Standard Specifications.

Revise Article 1030.04(b)(1) of the Standard Specifications to read.

"(1) High ESAL Mixtures. The target value for the air voids of the HMA shall be 4.0 percent and for IL-4.75 it shall be 3.5 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix, and shall conform to the following requirements.

VOLUMETRIC REQUIREMENTS High ESAL						
	Voids in the Mineral Aggregate (VMA), % minimum					Voids Filled with Asphalt Binder (VFA), %
Ndesign	IL-25.0	IL-19.0	IL-12.5	IL-9.5	IL-4.75 1/	
50	12.0	13.0	14.0	15.0	18.5	65 – 78 2/
70						65 - 75
90						
105						

1/ Maximum Draindown for IL-4.75 shall be 0.3%

2/ VFA for IL-4.75 shall be 72-85%"

Delete Article 1030.04(b) (4) of the Standard Specifications.

Revise table in Article 1030.04(b)(5) as follows:

"(5) SMA Mixtures.

Volumetric Requirements SMA [1/]			
Ndesign	Design Air Voids Target %	Voids in the Mineral Aggregate (VMA), % min.	Voids Filled with Asphalt (VFA), %
80 [4/]	3.5	17 [2/] 16 [3/]	75 - 83

1/ Maximum Draindown shall be 0.3%.

2/ Applies when specific gravity of coarse aggregate is ≥ 2.760.

3/ Applies when specific gravity of coarse aggregate is < 2.760.

4/ For surface course, coarse aggregate shall be Class B Quality; the coarse aggregate can be crushed steel slag, crystalline crushed stone or crushed sandstone.*
For binder course, coarse aggregate shall be crushed stone (dolomite), crushed gravel, crystalline crushed stone, or crushed sandstone.*

*Blending of different types of aggregate will not be permitted.

2) Design Verification and Production

Description. The following states the requirements for Hamburg Wheel and Tensile Strength testing for High ESAL, IL-4.75, and Stone Matrix Asphalt (SMA) hot-mix asphalt (HMA) mixes during mix design verification and production.

When the options of Warm Mix Asphalt, Reclaimed Asphalt Shingles, or Reclaimed Asphalt Pavement are used by the Contractor, the Hamburg Wheel and tensile strength requirements in this special provision will be superseded by the special provisions for Warm Mix Asphalt and/or by the District special provision for Reclaimed Asphalt Pavement and Reclaimed Asphalt Shingles as applicable.

Mix Design Testing. Add the following to Article 1030.04 of the Standard Specifications:

"(d) Verification Testing. High ESAL, IL-4.75, and SMA mix designs submitted for verification will be tested to ensure that the resulting mix designs will pass the required criteria for the Hamburg Wheel Test (IL mod AASHTO T-324) and the Tensile Strength Test (IL mod AASHTO T-283). The Department will perform a verification test on gyratory specimens compacted by the Contractor. If the mix fails the Department's verification test, the Contractor shall make the necessary changes to the mix and resubmit compacted specimens to the Department for verification. If the mix fails again, the mix design will be rejected.

All new and renewal mix designs will be required to be tested, prior to submittal for Department verification meeting the following requirements:

(1)Hamburg Wheel Test criteria.

Asphalt Binder Grade	# Repetitions	Max Rut Depth (mm)
PG 70 -XX (or higher)	20,000	12.5
PG 64 -XX (or lower)	10,000	12.5

Note: For SMA Designs (N-80) the maximum rut depth is 6.0 mm at 20,000 repetitions.
For IL 4.75mm Designs (N-50) the maximum rut depth is 9.0mm at 15,000 repetitions.

(2) Tensile Strength Criteria. The minimum allowable conditioned tensile strength shall be 415 kPa (60 psi) for non-polymer modified performance graded (PG) asphalt binder and 550 kPa (80 psi) for polymer modified PG asphalt binder. The maximum allowable unconditioned tensile strength shall be 1380 kPa (200 psi)."

Production Testing.

Revise first paragraph of Article 1030.06(a) to read:

"(a) High ESAL and IL-4.75 Mixtures. For each contract, a 300 ton (275 metric tons) test strip, except for IL -4.75 it will be 400 ton (363 metric ton), will be required at the beginning of HMA production for each mixture with a quantity of 3000 tons (2750 metric tons) or more according to the Manual of Test Procedures for Materials "Hot Mix Asphalt Test Strip Procedures"."

Delete second paragraph of Article 1030.06 (a).

Revise first sentence in fourth paragraph of Article 1030.06 (a) to read:

"Before constructing the test strip, target values shall be determined by applying gradation correction factors to the JMF when applicable."

Mixture sampled to represent the test strip shall include additional material sufficient for the Department to conduct Hamburg Wheel testing according to Illinois Modified AASHTO T324 (approximately 60 lb (27 kg) total).

Add the following to Article 1030.06 of the Standard Specifications:

"(c) Hamburg Wheel Test. All HMA mixtures shall be sampled within the first 500 tons (450 metric tons) on the first day of production or during start up with a split reserved for the Department. The mix sample shall be tested according to the Illinois Modified AASHTO T 324 and shall meet the requirements specified herein. Mix production shall not exceed 1500 tons (1350 metric tons) or one day's production, whichever comes first, until the testing is completed and the mixture is found to be in conformance. The requirement to cease mix production may be waived if the plant produced mixture demonstrates conformance prior to start of mix production for a contract.
The Department may conduct additional Hamburg Wheel Tests on production material as determined by the Engineer. If the mixture fails to meet the Hamburg Wheel criteria, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria"

The Contractor shall immediately cease production upon notification by the Engineer of failing Hamburg Wheel test. All prior produced material may be paved out provided all other mixture criteria are being met. No additional mixture shall be produced until the Engineer receives passing Hamburg Wheel tests.

Basis of Payment. Revise the seventh paragraph of Article 406.14 of the Standard Specifications to read:

"For all mixes designed and verified under the Hamburg Wheel criteria, the cost of furnishing and introducing anti-stripping additives in the HMA will not be paid for separately, but shall be considered as included in the contract unit price of the HMA item involved.

No additional compensation will be awarded to the Contractor because of reduced production rates associated with the addition of the anti-stripping additive."

Luminaire
Effective: January 1, 2012

Add the following to first paragraph of Article 1067(c) of the Standard Specifications:

> "The reflector shall not be altered by paint or other opaque coatings which would cover or coat the reflecting surface. Control of the light distribution by any method other than the reflecting material and the aforementioned clear protective coating that will alter the reflective properties of the reflecting surface is unacceptable"

Add the following to Article 1067(f) of the Standard Specifications:

> "The ballast shall be a High Pressure Sodium, high power factor, constant wattage auto-regulator, lead type (CWA) for operation on a nominal 240 volt system."

Revise Article 1067(f)(1) of the Standard Specifications to read:

> "The high pressure sodium, auto-regulator, lead type (CWA) ballast shall be designed to ANSI Standards and shall be designed and rated for operation on a nominal 240 volt system. The ballast shall provide positive lamp ignition at the input voltage of 216 volts. It shall operate the lamp over a range of input voltages from 216 to 264 volts without damage to the ballast. It shall provide lamp operation within lamp specifications for rated lamp life at input design voltage range. Operating characteristics shall produce output regulation not exceeding the following values:

Nominal Ballast Wattage	Maximum Ballast Regulation
750	25%
400	26%
310	26%
250	26%
150	24%
70	18%

> For this measure, regulation shall be defined as the ratio of the lamp watt difference between the upper and lower operating curves to the nominal lamp watts; with the lamp watt difference taken within the ANSI trapezoid at the nominal lamp operating voltage point parallel to the minimum lamp volt line:

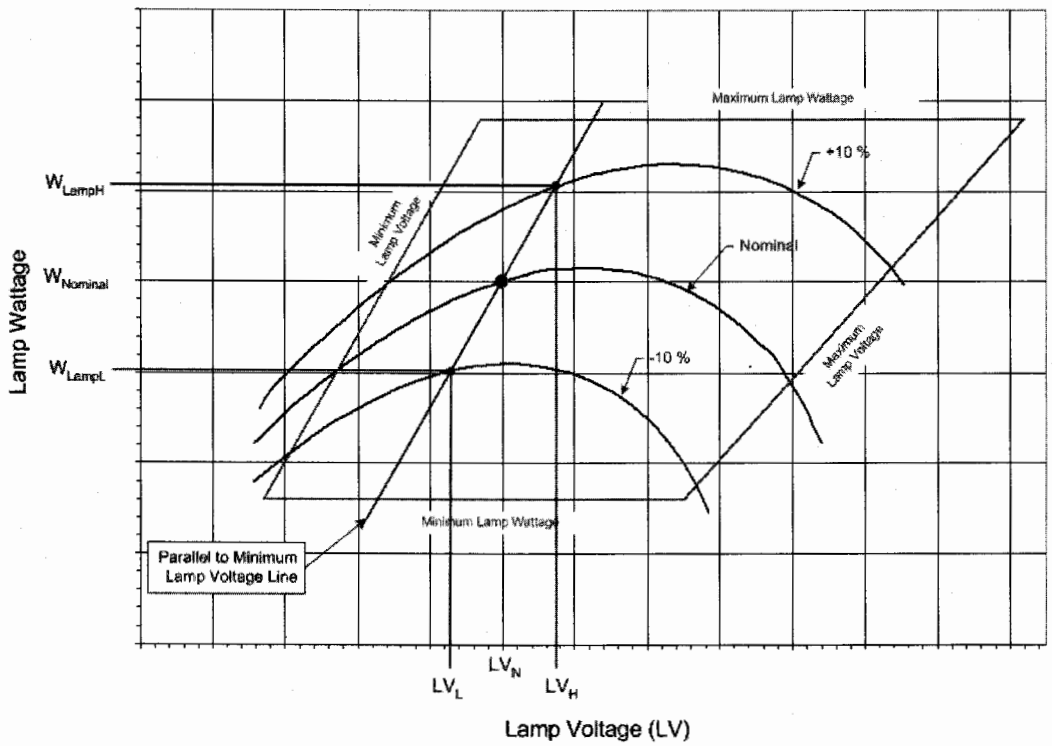

$$\text{Ballast Regulation} = \frac{W_{LampH} - W_{LampL}}{W_{LampN}} \times 100$$

where:
W_{LampH} = lamp watts at +10% line voltage when Lamp voltage = LV_H
W_{LampL} = lamp watts at - 10% line voltage when lamp voltage = LV_L
W_{lampN} = lamp watts at nominal lamp operating voltage = LV_N

Wattage	Nominal Lamp Voltage, LV_N	LV_L	LV_H
750	120v	115v	125v
400	100v	95v	105v
310	100v	95v	105v
250	100v	95v	105v
150	55v	50v	60v
70	52v	47v	57v

Ballast losses, based on cold bench tests, shall not exceed the following values:

Nominal Ballast Wattage	Maximum Ballast Losses
750	15%
400	20%
310	21%
250	24%
150	26%
70	34%

Ballast losses shall be calculated based on input watts and lamp watts at nominal system voltage as indicated in the following equation:

$$\text{Ballast Losses} = \frac{W_{Line} - W_{Lamp}}{W_{Lamp}} \times 100$$

where:
W_{line} = line watts at nominal system voltage
W_{lamp} = lamp watts at nominal system voltage

Ballast output to lamp. At nominal system voltage and nominal lamp voltage, the ballast shall deliver lamp wattage with the variation specified in the following table.

Nominal Ballast Wattage	Output to lamp variation
750	± 7.5%
400	± 7.5%
310	± 7.5%
250	± 7.5%
150	± 7.5%
70	± 7.5%

Example: *For a 400w luminaire, the ballast shall deliver 400 watts ±7.5% at a lamp voltage of 100v for the nominal system voltage of 240v which is the range of 370w to 430w.*

Ballast output over lamp life. Over the life of the lamp the ballast shall produce average output wattage of the nominal lamp rating as specified in the following table. Lamp wattage readings shall be taken at 5-volt increments throughout the ballast trapezoid. Reading shall begin at the lamp voltage (L_V) specified in the table and continue at 5 volt increments until the right side of the trapezoid is reached. The lamp wattage values shall then be averaged and shall be within the specified value of the nominal ballast rating. Submittal documents shall include a tabulation of the lamp wattage vs. lamp voltage readings.

Nominal Ballast Wattage	LV Readings begin at	Maximum Wattage Variation
750	110v	± 7.5%
400	90v	± 7.5%
310	90v	± 7.5%
250	90v	± 7.5%
150	50v	± 7.5%
70	45v	± 7.5%

Example: *For a 400w luminaire, the averaged lamp wattage reading shall not exceed the range of ±7.5% which is 370w to 430w*"

Add the following to Article 1067(h) of the Standard Specifications:

"Independent Testing. Independent testing of luminaires shall be required whenever the pay item quantity of luminaires of a given pay item, as indicated on the plans, is 50 or more. For each luminaire type to be so tested, one luminaire plus one luminaire for each 50 luminaires shall be tested. Example: *A plan pay item quantity of 75 luminaires for a specific pay item would dictate that 2 be tested; 135 luminaires would dictate that three be tested.*" If the luminaire performance table is missing from the contract documents, the luminaire(s) shall be tested and the test results shall be evaluated against the manufacturer's data as provided in the approved material submittal. The test luminaire(s) results shall be equal to or better than the published data. If the test results indicated performance not meeting the published data, the test luminaire will be designated as failed and corrective action as described herein shall be performed.

The Contractor shall be responsible for all costs associated with the specified testing, including but not limited to shipping, travel and lodging costs as well as the costs of the tests themselves, all as part of the bid unit price for this item. Travel, lodging and other associated costs for travel by the Engineer shall be direct-billed to or shall be pre-paid by the Contractor, requiring no direct reimbursement to the Engineer or the independent witness, as applicable"

The Contractor shall select one of the following options for the required testing with the Engineer's approval:

a. Engineer Factory Selection for Independent Lab: The Contractor may select this option if the luminaire manufacturing facility is within the state of Illinois. The Contractor shall propose an independent test laboratory for approval by the Engineer. The selected luminaires shall be marked by the Engineer and shipped to the independent laboratory for tests.

b. Engineer Witness of Independent Lab Test: The Contractor may select this option if the independent testing laboratory is within the state of Illinois. The Engineer shall select, from the project luminaires at the manufacturer's facility or at the Contractor's storage facility, luminaires for testing by the independent laboratory.

c. Independent Witness of Manufacturer Testing: The independent witness shall select from the project luminaires at the manufacturers facility or at the Contractor's storage facility, the luminaires for testing. The Contractor shall propose a qualified independent agent, familiar with the luminaire requirements and test procedures, for approval by the Engineer, to witness the required tests as performed by the luminaire manufacturer.

   The independent witness shall as a minimum meet the following requirements:

   - Have been involved with roadway lighting design for at least 15 years.
   - Not have been the employee of a luminaire or ballast manufacturer within the last 5 years.
   - Not associated in any way (plan preparation, construction or supply) with the particular project being tested.
   - Be a member of IESNA in good standing.
   - Provide a list of professional references.

   This list is not an all inclusive list and the Engineer will make the final determination as to the acceptability of the proposed independent witness.

d. Engineer Factory Selection and Witness of Manufacturer Testing: The Contractor may select this option if the luminaire manufacturing facility is within the state of Illinois. At the Manufacturer's facility, the Engineer shall select the luminaires to be tested and shall be present during the testing process. The Contractor shall schedule travel by the Engineer to and from the Manufacturer's laboratory to witness the performance of the required tests.

   Should any of the tested luminaires fail to satisfy the specifications and perform according to approved submittal information, the luminaire shall be

unacceptable and be replaced by alternate equipment meeting the specifications with the submittal and testing process repeated in their entirety; or corrections made to achieve required performance. In the case of corrections, the Contractor shall advise the Engineer of corrections made and shall request a repeat of the specified testing and, if the corrections are deemed reasonable by the Engineer, the testing process shall be repeated. The number of luminaires to be tested shall be the same quantity as originally tested; i.e. if three luminaires were tested originally, one, two or three failed, another three must be tested after corrective action is taken.

Revise Article 1067.06(a)(1) of the Standard Specifications to read:

"The lamps shall be of the clear type and shall have a color of 1900° to 2200° Kelvin."

Add the following table(s) to Article 1067 of the Standard Specifications:

IDOT DISTRICT 1 LUMINAIRE PERFORMANCE TABLE

GIVEN CONDITIONS		
ROADWAY DATA	Pavement Width	(ft)
	Number of Lanes	
	I.E.S. Surface Classification	R3
	Q-Zero Value	.07
LIGHT POLE DATA	Mounting Height	(ft)
	Mast Arm Length	(ft)
	Pole Set-Back From Edge of Pavement	(ft)
LUMINAIRE DATA	Lamp Type	HPS
	Lamp Lumens	
	I.E.S. Vertical Distribution	Medium
	I.E.S. Control Of Distribution	Cutoff
	I.E.S. Lateral Distribution	Type I
	Total Light Loss Factor	
LAYOUT DATA	Spacing	(ft)
	Configuration	Single Sided
	Luminaire Overhang over edge of pavement	(ft)

NOTE: Variations from the above specified I.E.S. distribution pattern may be requested and acceptance of variations will be subject to review by the Engineer based on how well the performance requirements are met.

PERFORMANCE REQUIREMENTS

NOTE: These performance requirements shall be the minimum acceptable standards of photometric performance for the luminaire, based on the given conditions listed above.

LUMINANCE	Average Luminance, L_{AVE}	Cd/m^2
	Uniformity Ratio, L_{AVE}/L_{MIN}	(Max)
	Uniformity Ratio, L_{MAX}/L_{MIN}	(Max)
	Veiling Luminance Ratio, L_V/L_{AVE}	(Max)

Exposed Raceways (DISTRICT ONE)
Effective: January 1, 2012

Revise the first paragraph of Article 811.03(a) of the Standard Specifications to read:

"General. Rigid metal conduit installation shall be according to Article 810.05(a). Conduits terminating in junction and pull boxes shall be terminated with insulated and gasketed watertight threaded NEMA 4X conduit hubs. The hubs shall be Listed under UL 514B. The insulated throat shall be rated up to 105° C. When PVC coated conduit is utilized, the aforementioned hubs shall also be PVC coated."

Add the following to Article 811.03(b) of the Standard Specifications:

"Where PVC coated conduit is utilized, all conduit fittings, couplings and clamps shall be PVC coated. All other mounting hardware and appurtenances shall be stainless steel."

"The personnel installing the PVC coated conduit must be trained and certified by the PVC coated conduit Manufacturer or Manufacturer's representative to install PVC coated conduit. Documentation demonstrating this requirement must be submitted for review and approval."

Add the following to Article 1088.01(a) of the Standard Specifications:

All iron and steel products, which are to be incorporated into the work, including conduit and all conduit fittings, shall be domestically manufactured or produced and fabricated as specified in Article 106."

Revise Article 1088.01(a)(3) of the Standard Specifications to read:

"a. PVC Coated Steel Conduit. The PVC coated rigid metal conduit shall be UL Listed (UL 6). The PVC coating must have been investigated by UL as providing the primary corrosion protection for the rigid metal conduit. Ferrous fittings for general service locations shall be UL Listed with PVC as the primary corrosion protection. Hazardous location fittings, prior to plastic coating shall be UL listed.

b. The PVC coating shall have the following characteristics:

Hardness:	85+ Shore A Durometer
Dielectric Strength:	400V/mil @ 60 Hz

Aging:	1,000 Hours Atlas Weatherometer
Temperature	The PVC compound shall conform at 0° F. to Federal Specifications PL-406b, Method 2051, Amendment 1 of 25 September 1952 (ASTM D 746)
Elongation:	200%

c. The exterior and interior galvanized conduit surface shall be chemically treated to enhance PVC coating adhesion and shall also be coated with a primer before the PVC coating to ensure a bond between the zinc substrate and the PVC coating. The bond strength created shall be greater than the tensile strength of the plastic coating.

d. The nominal thickness of the PVC coating shall be 1 mm (40 mils). The PVC exterior and urethane interior coatings applied to the conduit shall afford sufficient flexibility to permit field bending without cracking or flaking at temperatures above -1°C (30°F).

e. An interior urethane coating shall be uniformly and consistently applied to the interior of all conduit and fittings. This internal coating shall be a nominal 2 mil thickness. The interior coating shall be applied in a manner so there are no runs, drips, or pinholes at any point. The coating shall not peel, flake, or chip off after a cut is made in the conduit or a scratch is made in the coating.

f. Conduit bodies shall have a tongue-in-groove gasket for maximum sealing capability. The design shall incorporate a positive placement feature to assure proper installation. Certified test results confirming seal performance at 15 psig (positive) and 25 in. of mercury (vacuum) for 72 hours shall be submitted for review when requested by the Engineer.

g. The PVC conduit shall pass the following tests:

<u>Exterior PVC Bond test RN1:</u>

Two parallel cuts 13 mm (1/2 inch) apart and 40 mm (1 1/2 inches) in length shall be made with a sharp knife along the longitudinal axis. A third cut shall be made perpendicular to and crossing the longitudinal cuts at one end. The knife shall then be worked under the PVC coating for 13 mm (1/2 inch) to free the coating from the metal.

Using pliers, the freed PVC tab shall be pulled with a force applied vertically and away from the conduit. The PVC tab shall tear rather than cause any additional PVC coating to separate from the substrate.

<u>Boil Test:</u>

Acceptable conduit coating bonds (exterior and interior) shall be confirmed if there is no disbondment after a minimum average of 200 hours in boiling water or exposure to steam vapor at one atmosphere. Certified test results from a national recognized independent testing laboratory shall be submitted for review and approval. The RN1 Bond Test and the Standard Method for Measuring Adhesion by Tape Test shall be utilized.

Exterior Adhesion. In accordance with ASTM D870, a 6" length of conduit test specimen shall be placed in boiling water. The specimen shall be periodically removed, cooled to ambient temperature and immediately tested according to the bond test (RN1). When the PVC coating separates from the substrate, the boil time to failure in hours shall be recorded.

Interior Adhesion. In accordance with ASTM D3359, a 6" conduit test specimen shall be cut in half longitudinally and placed in boiling water or directly above boiling water with the urethane surface facing down. The specimen shall be periodically removed, cooled to ambient temperature and tested in accordance with the Standard Method of Adhesion by Tape Test (ASTM D3359). When the coating disbonds, the time to failure in hours shall be recorded.

Heat/Humidity Test:

Acceptable conduit coating bonds shall be confirmed by a minimum average of 30 days in the Heat and Humidity Test. The RN1 Bond Test and the Standard Method for Measuring Adhesion by Tape Test shall be utilized.

Exterior Adhesion. In accordance with ASTM D1151, D1735, D2247 and D4585, conduit specimens shall be placed in a heat and humidity environment where the temperature is maintained at 150°F (66°C) and 95% relative humidity. The specimens shall be periodically removed and a bond test (RN1) performed. When the PVC coating separates from the substrate, the exposure time to failure in days shall be recorded.

Interior Adhesion. In accordance with ASTM D3359, conduit specimens shall be placed in a heat and humidity environment where the temperature is maintained at 150°F (66°C) and 95% relative humidity. When the coating disbonds, the time to failure in hours shall be recorded.

Add the following to Article 1088.01(a)(4) of the Standard Specifications:

> "All liquid tight flexible metal conduit fittings shall have an insulated throat to prevent abrasion of the conductors and shall have a captive sealing O-ring gasket. The fittings shall be Listed under UL 514B. The insulated throat shall be rated up to 105° C."

Revise the second paragraph of Article 811.04 of the Standard Specifications to read:

> "Expansion fittings and LFNC will not be measured for payment."

Revise Article 811.05 of the Standard Specifications to read:

> **"811.05 Basis of Payment.** This work will be paid for at the contract unit price per meter (foot) for **CONDUIT ATTACHED TO STRUCTURE**, of the diameter specified, **RIGID GALVANIZED STEEL** or **CONDUIT ATTACHED TO STRUCTURE**, of the diameter specified, **RIGID GALVANIZED STEEL, PVC COATED."**

Underground Raceways (DISTRICT ONE)
Effective: January 1, 2012

Revise Article 810.04 of the Standard Specifications to read:

> "Installation. All underground conduit shall have a minimum depth of 30-inches (700 mm) below the finished grade."

Add the following to Article 810.04 of the Standard Specifications:

> "All metal conduit installed underground shall be Rigid Steel Conduit unless otherwise indicated on the plans."

Add the following to Article 810.04 of the Standard Specifications:

> "All raceways which extend outside of a structure or duct bank but are not terminated in a cabinet, junction box, pull box, handhole, post, pole, or pedestal shall extend a minimum or 300 mm (12") or the length shown on the plans beyond the structure or duct bank. The end of this extension shall be capped and sealed with a cap designed for the conduit to be capped. The ends of rigid metal conduit to be capped shall be threaded, the threads protected with full galvanizing, and capped with a threaded galvanized steel cap. The ends of rigid nonmetallic conduit and coilable nonmetallic conduit shall be capped with a rigid PVC cap of not less than 3 mm (0.125") thick. The cap shall be sealed to the conduit using a room-temperature-vulcanizing (RTV) sealant compatible with the material of both the cap and the conduit. A washer or similar metal ring shall be glued to the inside center of the cap with epoxy, and the pull cord shall be tied to this ring."

Add the following to Article 810.04(c) of the Standard Specifications:

> "Coilable non-metallic conduit shall be machine straightened to remove the longitudinal curvature caused by coiling the conduit onto reels prior to installing in trench, encasing in concrete or embedding in structure. The straightening shall not deform the cross-section of the conduit such that any two measured outside diameters, each from any location and at any orientation around the longitudinal axis along the conduit differ by more than 6 mm (0.25")." The longitudinal axis of the straightened conduit shall not deviate by more than 20 mm per meter (0.25" per foot" from a straight line. The HDPE and straightening mechanism manufacturer operating temperatures shall be followed.

RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES (D-1)

Effective: November 1, 2012
Revise: November 1, 2013

Revise Section 1031 of the Standard Specifications to read:

"SECTION 1031. RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES

1031.01 Description. Reclaimed asphalt pavement and reclaimed asphalt shingles shall be according to the following.

(a) Reclaimed Asphalt Pavement (RAP). RAP is the material resulting from cold milling or crushing an existing hot-mix asphalt (HMA) pavement. RAP will be considered processed FRAP after completion of both crushing and screening to size. The Contractor shall supply written documentation that the RAP originated from routes or airfields under federal, state, or local agency jurisdiction.

(b) Reclaimed Asphalt Shingles (RAS). Reclaimed asphalt shingles (RAS). RAS is from the processing and grinding of preconsumer or post-consumer shingles. RAS shall be a clean and uniform material with a maximum of 0.5 percent unacceptable material, as defined in Bureau of Materials and Physical Research Policy Memorandum "Reclaimed Asphalt Shingle (RAS) Sources", by weight of RAS. All RAS used shall come from a Bureau of Materials and Physical Research approved processing facility where it shall be ground and processed to 100 percent passing the 3/8 in. (9.5 mm) sieve and 90 percent passing the #4 (4.75 mm) sieve . RAS shall meet the testing requirements specified herein. In addition, RAS shall meet the following Type 1 or Type 2 requirements.

(1) Type 1. Type 1 RAS shall be processed, preconsumer asphalt shingles salvaged from the manufacture of residential asphalt roofing shingles.

(2) Type 2. Type 2 RAS shall be processed post-consumer shingles only, salvaged from residential, or four unit or less dwellings not subject to the National Emission Standards for Hazardous Air Pollutants (NESHAP).

1031.02 Stockpiles. RAP and RAS stockpiles shall be according to the following.

(a) RAP Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. Additional processed RAP (FRAP) shall be stockpiled in a separate working pile, as designated in the QC Plan, and only added to the sealed stockpile when test results for the working pile are complete and are found to meet tolerances specified herein for the original sealed FRAP stockpile. Stockpiles shall be sufficiently separated to prevent intermingling at the base. All stockpiles (including

unprocessed RAP and FRAP) shall be identified by signs indicating the type as listed below (i.e. "Non- Quality, FRAP -#4 or Type 2 RAS", etc...).

(1) Fractionated RAP (FRAP). FRAP shall consist of RAP from Class I, Superpave HMA (High and Low ESAL) or equivalent mixtures. The coarse aggregate in FRAP shall be crushed aggregate and may represent more than one aggregate type and/or quality but shall be at least C quality. All FRAP shall be processed prior to testing and sized into fractions with the separation occurring on or between the #4 (4.75 mm) and 1/2 in. (12.5 mm) sieves. Agglomerations shall be minimized such that 100 percent of the RAP in the coarse fraction shall pass the maximum sieve size specified for the mix the FRAP will be used in.

(2) Restricted FRAP (B quality) stockpiles shall consist of RAP from Class I, Superpave (High ESAL), or HMA (High ESAL). If approved by the Engineer, the aggregate from a maximum 3.0 inch single combined pass of surface/binder milling will be classified as B quality. All millings from this application will be processed into FRAP as described previously.

(3) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I, Superpave HMA (High and Low ESAL) or equivalent mixtures. The coarse aggregate in this RAP shall be crushed aggregate and may represent more than one aggregate type and/or quality but shall be at least C quality. This RAP may have an inconsistent gradation and/or asphalt binder content prior to processing. All conglomerate RAP shall be processed (FRAP) prior to testing. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.

(4) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP from HMA shoulders, bituminous stabilized subbases or Superpave (Low ESAL)/HMA (Low ESAL) IL-19.0L binder mixture. The coarse aggregate in this RAP may be crushed or round but shall be at least D quality. This RAP may have an inconsistent gradation and/or asphalt binder content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.

(5) Non-Quality. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Non-Quality".

RAP or FRAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, joint sealants, plant cleanout etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.

(b) RAS Stockpiles. Type 1 and Type 2 RAS shall be stockpiled separately and shall be sufficiently separated to prevent intermingling at the base. Each stockpile shall be signed indicating what type of RAS is present.

However, a RAS source may submit a written request to the Department for approval to blend mechanically a specified ratio of type 1 RAS with type 2 RAS. The source will not be permitted to change the ratio of the blend without the Department prior written approval. The Engineer's written approval will be required, to mechanically blend RAS with any fine aggregate produced under the AGCS, up to an equal weight of RAS, to improve workability. The fine aggregate shall be "B Quality" or better from an approved Aggregate Gradation Control System source. The fine aggregate shall be one that is approved for use in the HMA mixture and accounted for in the mix design and during HMA production.

Records identifying the shingle processing facility supplying the RAS, RAS type and lot number shall be maintained by project contract number and kept for a minimum of three years.

1031.03 Testing. FRAP and RAS testing shall be according to the following.

(a) FRAP Testing. When used in HMA, the FRAP shall be sampled and tested either during processing or after stockpiling. It shall also be sampled during HMA production.

(1) During Stockpiling. For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 500 tons (450 metric tons) for the first 2000 tons (1800 metric tons) and one sample per 2000 tons (1800 metric tons) thereafter. A minimum of five tests shall be required for stockpiles less than 4000 tons (3600 metric tons).

(2) Incoming Material. For testing as incoming material, washed extraction samples shall be run at a minimum frequency of one sample per 2000 tons (1800 metric tons) or once per week, whichever comes first.

(3) After Stockpiling. For testing after stockpiling, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP/FRAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to obtain representative samples throughout the pile for testing.

Before extraction, each field sample of FRAP, shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

(b) RAS Testing. RAS shall be sampled and tested during stockpiling according to Bureau of Materials and Physical Research Policy Memorandum, "Reclaimed Asphalt Shingle (RAS) Sources". The Contractor shall also sample as incoming material at the HMA plant.

(1) During Stockpiling. Washed extraction and testing for unacceptable materials shall be run at the minimum frequency of one sample per 200 tons (180 metric tons) for the first 1000 tons (900 metric tons) and one sample per 1000 tons (900 metric tons) thereafter. A minimum of five samples are required for stockpiles less than 1000 tons (900 metric tons). Once a ≤ 1000 ton (900 metric ton), five-sample/test stockpile has been established it shall be sealed. Additional incoming RAS shall be in a separate working pile as designated in the Quality Control plan and only added to the sealed stockpile when the test results of the working pile are complete and are found to meet the tolerances specified herein for the original sealed RAS stockpile.

(2) Incoming Material. For testing as incoming material at the HMA plant, washed extraction shall be run at the minimum frequency of one sample per 250 tons (227 metric tons). A minimum of five samples are required for stockpiles less than 1000 tons (900 metric tons). The incoming material test results shall meet the tolerances specified herein.

The Contractor shall obtain and make available all test results from start of the initial stockpile sampled and tested at the shingle processing facility in accordance with the facility's QC Plan.

Before extraction, each field sample shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedures. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

1031.04 Evaluation of Tests. Evaluation of tests results shall be according to the following.

(a) Evaluation of FRAP Test Results. All test results shall be compiled to include asphalt binder content, gradation and, when applicable (for slag), G_{mm}. A five test average of results from the original pile will be used in the mix designs. Individual extraction test results run thereafter, shall be compared to the average used for the mix design, and will be accepted if within the tolerances listed below.

Parameter	FRAP
No. 4 (4.75 mm)	± 6 %
No. 8 (2.36 mm)	± 5 %
No. 30 (600 μm)	± 5 %
No. 200 (75 μm)	± 2.0 %
Asphalt Binder	± 0.3 %
G_{mm}	± 0.03 [1/]

1/ For stockpile with slag or steel slag present as determined in the current Manual of Test Procedures Appendix B 21, "Determination of Reclaimed Asphalt Pavement Aggregate Bulk Specific Gravity".

If any individual sieve and/or asphalt binder content tests are out of the above tolerances when compared to the average used for the mix design, the FRAP stockpile shall not be used in Hot-Mix Asphalt unless the FRAP representing those tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

The Contractor shall maintain a representative moving average of five tests to be used for Hot-Mix Asphalt production.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)" or Illinois Modified AASHTO T-164-11, Test Method A.

(b) Evaluation of RAS Test Results. All of the test results, with the exception of percent unacceptable materials, shall be compiled and averaged for asphalt binder content and gradation. A five test average of results from the original pile will be used in the mix designs. Individual test results run thereafter, when compared to the average used for the mix design, will be accepted if within the tolerances listed below.

Parameter	RAS
No. 8 (2.36 mm)	± 5 %
No. 16 (1.18 mm)	± 5 %
No. 30 (600 µm)	± 4 %
No. 200 (75 µm)	± 2.5 %
Asphalt Binder Content	± 2.0 %

If any individual sieve and/or asphalt binder content tests are out of the above tolerances when compared to the average used for the mix design, the RAS shall not be used in Hot-Mix Asphalt unless the RAS representing those tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

(c) Quality Assurance by the Engineer. The Engineer may witness the sampling and splitting conduct assurance tests on split samples taken by the Contractor for quality control testing a minimum of once a month.

The overall testing frequency will be performed over the entire range of Contractor samples for asphalt binder content and gradation. The Engineer may select any or all split samples for assurance testing. The test results will be made available to the Contractor as soon as they become available.

The Engineer will notify the Contractor of observed deficiencies.

Differences between the Contractor's and the Engineer's split sample test results will be considered acceptable if within the following limits.

Test Parameter	Acceptable Limits of Precision	
% Passing:[1/]	FRAP	RAS
1 / 2 in.	5.0%	
No. 4	5.0%	
No. 8	3.0%	4.0%
No. 30	2.0%	3.0%
No. 200	2.2%	2.5%
Asphalt Binder Content	0.3%	1.0%
G_{mm}	0.030	

1/ Based on washed extraction.

In the event comparisons are outside the above acceptable limits of precision, the Engineer will immediately investigate.

(d) Acceptance by the Engineer. Acceptable of the material will be based on the validation of the Contractor's quality control by the assurance process.

1031.05 Quality Designation of Aggregate in RAP and FRAP.

(a) RAP. The aggregate quality of the RAP for homogenous, conglomerate, and conglomerate "D" quality stockpiles shall be set by the lowest quality of coarse aggregate in the RAP stockpile and are designated as follows.

(1) RAP from Class I, Superpave/HMA (High ESAL), or (Low ESAL) IL-9.5L surface mixtures are designated as containing Class B quality coarse aggregate.

(2) RAP from Superpave/HMA (Low ESAL) IL-19.0L binder mixture is designated as Class D quality coarse aggregate.

(3) RAP from Class I, Superpave/HMA (High ESAL) binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate.

(4) RAP from bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate.

(b) FRAP. If the Engineer has documentation of the quality of the FRAP aggregate, the Contractor shall use the assigned quality provided by the Engineer.

If the quality is not known, the quality shall be determined as follows. Fractionated RAP stockpiles containing plus #4 (4.75 mm) sieve coarse aggregate shall have a maximum tonnage of 5,000 tons (4,500 metric tons). The Contractor shall obtain a representative sample witnessed by the Engineer. The sample shall be a minimum of 50 lb (25 kg). The sample shall be extracted according to Illinois Modified AASHTO T 164 by a consultant prequalified by the Department for the specified testing. The consultant shall submit the test results along with the recovered aggregate to the District Office. The cost for this testing shall be paid by the Contractor. The District will forward the sample to the BMPR Aggregate Lab for MicroDeval Testing, according to Illinois Modified AASHTO T 327. A maximum loss of 15.0 percent will be applied for all HMA applications. The fine aggregate portion of the fractionated RAP shall not be used in any HMA mixtures that require a minimum of "B" quality aggregate or better, until the coarse aggregate fraction has been determined to be acceptable thru a MicroDeval Testing.

1031.06 Use of FRAP and/or RAS in HMA. The use of FRAP and/or RAS shall be a Contractor's option when constructing HMA in all contracts.

(a) FRAP. The use of FRAP in HMA shall be as follows.

(1) Coarse Aggregate Size (after extraction). The coarse aggregate in all FRAP shall be equal to or less than the nominal maximum size requirement for the HMA mixture to be produced.

(2) Steel Slag Stockpiles. FRAP stockpiles containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in HMA (High ESAL and Low ESAL) mixtures regardless of lift or mix type.

(3) Use in HMA Surface Mixtures (High and Low ESAL). FRAP stockpiles for use in HMA surface mixtures (High and Low ESAL) shall have coarse aggregate that is Class B quality or better. FRAP shall be considered equivalent to limestone for frictional considerations unless produced/screened to minus 3/8 inch.

(4) Use in HMA Binder Mixtures (High and Low ESAL), HMA Base Course, and HMA Base Course Widening. FRAP stockpiles for use in HMA binder mixtures (High and Low ESAL), HMA base course, and HMA base course widening shall be FRAP in which the coarse aggregate is Class C quality or better.

(5) Use in Shoulders and Subbase. FRAP stockpiles for use in HMA shoulders and stabilized subbase (HMA) shall be FRAP, Restricted FRAP, conglomerate, or conglomerate DQ.

(b) RAS. RAS meeting Type 1 or Type 2 requirements will be permitted in all HMA applications as specified herein.

(c) FRAP and/or RAS Usage Limits. Type 1 or Type 2 RAS may be used alone or in conjunction with FRAP in HMA mixtures up to a maximum of 5.0% by weight of the total mix.

When FRAP, RAS or FRAP in conjunction with RAS is used, the percent of virgin asphalt binder replacement (ABR) shall not exceed the amounts indicated in the table below for a given N Design.

Max Asphalt Binder Replacement for FRAP with RAS Combination

HMA Mixtures 1/ 2/ 4/	Maximum % ABR		
Ndesign	Binder/Leveling Binder	Surface	Polymer Modified 3/
30L	50	40	30
50	40	35	30
70	40	30	30
90	40	30	30
4.75 mm N-50			40
SMA N-80			30

1/ For HMA "All Other" (shoulder and stabilized subbase) N-30, the percent asphalt binder replacement shall not exceed 50% of the total asphalt binder in the mixture.

2/ When the binder replacement exceeds 15 percent for all mixes, except for SMA and IL-4.75, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent binder replacement using a virgin asphalt binder grade of PG64-22 will be reduced to a PG58-28). When constructing full depth HMA and the ABR is less than 15 percent, the required virgin asphalt binder grade shall be PG64-28.

3/ When the ABR for SMA or IL-4.75 is 15 percent or less, the required virgin asphalt binder shall be SBS PG76-22 and the elastic recovery shall be a minimum of 80. When the ABR for SMA or IL-4.75 exceeds 15%, the virgin asphalt binder grade shall be SBS PG70-28 and the elastic recovery shall be a minimum of 80.

4/ When FRAP or RAS is used alone, the maximum percent asphalt binder replacement designated on the table shall be reduced by 10%.

1031.07 HMA Mix Designs. At the Contractor's option, HMA mixtures may be constructed utilizing RAP/FRAP and/or RAS material meeting the detailed requirements specified herein.

(a) FRAP and/or RAS. FRAP and /or RAS mix designs shall be submitted for verification. If additional FRAP or RAS stockpiles are tested and found to be within tolerance, as defined under "Evaluation of Tests" herein, and meet all requirements herein, the additional FRAP or RAS stockpiles may be used in the original design at the percent previously verified.

(b) RAS. Type 1 and Type 2 RAS are not interchangeable in a mix design. A RAS stone bulk specific gravity (Gsb) of 2.500 shall be used for mix design purposes.

1031.08 HMA Production. HMA production utilizing FRAP and/or RAS shall be as follows.

To remove or reduce agglomerated material, a scalping screen, gator, crushing unit, or comparable sizing device approved by the Engineer shall be used in the RAS and FRAP feed system to remove or reduce oversized material. If material passing the sizing device adversely affects the mix production or quality of the mix, the sizing device shall be set at a size specified by the Engineer.

If during mix production, corrective actions fail to maintain FRAP, RAS or QC/QA test results within control tolerances or the requirements listed herein the Contractor shall cease production of the mixture containing FRAP or RAS and conduct an investigation that may require a new mix design.

(a) RAS. RAS shall be incorporated into the HMA mixture either by a separate weight depletion system or by using the RAP weigh belt. Either feed system shall be interlocked with the aggregate feed or weigh system to maintain correct proportions for all rates of production and batch sizes. The portion of RAS shall be controlled accurately to within ± 0.5 percent of the amount of RAS utilized. When using the weight depletion system, flow indicators or sensing devices shall be provided and interlocked with the plant controls such that the mixture production is halted when RAS flow is interrupted.

(b) HMA Plant Requirements. HMA plants utilizing FRAP and/or RAS shall be capable of automatically recording and printing the following information.

(1) Dryer Drum Plants.

a. Date, month, year, and time to the nearest minute for each print.

b. HMA mix number assigned by the Department.

c. Accumulated weight of dry aggregate (combined or individual) in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).

d. Accumulated dry weight of RAS and FRAP in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).

e. Accumulated mineral filler in revolutions, tons (metric tons), etc. to the nearest 0.1 unit.

f. Accumulated asphalt binder in gallons (liters), tons (metric tons), etc. to the nearest 0.1 unit.

g. Residual asphalt binder in the RAS and FRAP material as a percent of the total mix to the nearest 0.1 percent.

h. Aggregate RAS and FRAP moisture compensators in percent as set on the control panel. (Required when accumulated or individual aggregate and RAS and FRAP are printed in wet condition.)

i. When producing mixtures with FRAP and/or RAS, a positive dust control system shall be utilized.

j. Accumulated mixture tonnage.

k. Dust Removed (accumulated to the nearest 0.1 ton)

(2) Batch Plants.

a. Date, month, year, and time to the nearest minute for each print.

b. HMA mix number assigned by the Department.

c. Individual virgin aggregate hot bin batch weights to the nearest pound (kilogram).

d. Mineral filler weight to the nearest pound (kilogram).

f. RAS and FRAP weight to the nearest pound (kilogram).

g. Virgin asphalt binder weight to the nearest pound (kilogram).

h. Residual asphalt binder in the RAS and FRAP material as a percent of the total mix to the nearest 0.1 percent.

The printouts shall be maintained in a file at the plant for a minimum of one year or as directed by the Engineer and shall be made available upon request. The printing system will be inspected by the Engineer prior to production and verified at the beginning of each construction season thereafter.

1031.09 RAP in Aggregate Surface Course and Aggregate Shoulders. The use of RAP or FRAP in aggregate surface course and aggregate shoulders shall be as follows.

(a) Stockpiles and Testing. RAP stockpiles may be any of those listed in Article 1031.02, except "Non-Quality" and "FRAP". The testing requirements of Article 1031.03 shall not apply. RAP used to construct aggregate surface course and aggregate shoulders shall be according to the current Bureau of Materials and Physical Research's Policy Memorandum, "Reclaimed Asphalt Pavement (RAP) for Aggregate Applications"

(b) Gradation. One hundred percent of the RAP material shall pass the 1 1/2 in. (37.5mm) sieve. The RAP material shall be reasonably well graded from coarse to fine. RAP material that is gap-graded, FRAP, or single sized will not be accepted for use as Aggregate Surface Course and Aggregate Shoulders."

Electric Service Installation
Effective: January 1, 2012

Description. This item shall consist of all material and labor required to extend, connect or modify the electric services, as indicated or specified, which is over and above the work performed by the utility. Unless otherwise indicated, the cost for the utility work, if any, will be reimbursed to the Contractor separately under ELECTRIC UTILITY SERVICE CONNECTION. This item may apply to the work at more than one service location and each will be paid separately.

Materials. Materials shall be in accordance with the Standard Specifications.

CONSTRUCTION REQUIREMENTS

General. The Contractor shall ascertain the work being provided by the electric utility and shall provide all additional material and work not included by other contract pay items required to complete the electric service work in complete compliance with the requirements of the utility.

No additional compensation will be allowed for work required for the electric service, even though not explicitly shown on the Drawings or specified herein

Method Of Measurement. Electric Service Installation shall be counted, each.

Basis Of Payment. This work will be paid for at the contract unit price each for **ELECTRIC SERVICE INSTALLATION** which shall be payment in full for the work specified herein.

Unit Duct (DISTRICT ONE)
Effective: January 1, 2012

Revise the first paragraph of Article 810.04 to read:

"The unit duct shall be installed at a minimum depth of 30-inches (760 mm) unless otherwise directed by the Engineer."

Revise Article 1088.01(c) to read:

"(c) Coilable Nonmetallic Conduit.

General:

The duct shall be a plastic duct which is intended for underground use and which can be manufactured and coiled or reeled in continuous transportable lengths and uncoiled for further processing and/or installation without adversely affecting its properties of performance. The duct shall be a plastic duct which is intended for underground use and can be manufactured and coiled or reeled in continuous transportable lengths and uncoiled for further processing and/or installation without adversely affecting its properties of performance.

The duct shall be made of high density polyethylene which shall meet the requirements of ASTM D 2447, for schedule 40. The duct shall be composed of black high density polyethylene meeting the requirements of ASTM D 3350, Class C, Grade P33. The wall thickness shall be in accordance with Table 2 for ASTM D 2447.

The duct shall be UL Listed per 651-B for continuous length HDPE coiled conduit. The duct shall also comply with NEC Article 354.100 and 354.120.

Submittal information shall demonstrate compliance with the details of these requirements.

Dimensions:

Duct dimensions shall conform to the standards listed in ASTM D2447. Submittal information shall demonstrate compliance with these requirements.

Nominal Size		Nominal I.D.		Nominal O.D.		Minimum Wall	
mm	in	mm	in	mm	in	mm	in
31.75	1.25	35.05	1.380	42.16	1.660	3.556 +0.51	0.140 +0.020
38.1	1.50	40.89	1.610	48.26	1.900	3.683 +0.51	0.145 +0.020

Nominal Size		Pulled Tensile	
mm	in	N	lbs

31.75	1.25	3322	747
38.1	1.50	3972	893

Marking:

As specified in NEMA Standard Publication No. TC-7, the duct shall be clearly and durably marked at least every 3.05 meters (10 feet) with the material designation (HDPE for high density polyethylene), nominal size of the duct and the name and/or trademark of the manufacturer.

Performance Tests:

Polyethylene Duct testing procedures and test results shall meet the requirements of UL 651. Certified copies of the test report shall be submitted to the Engineer prior to the installation of the duct. Duct crush test results shall meet or exceed the following requirements:

Duct Diameter		**Min. force required to deform sample 50%**	
mm	in	N	lbs
35	1.25	4937	1110
41	1.5	4559	1025

Wire and Cable (DISTRICT ONE)
Effective: January 1, 2012

Add the following to the first paragraph of Article 1066.02(a):

"The cable shall be rated at a minimum of 90°C dry and 75°C wet and shall be suitable for installation in wet and dry locations, and shall be resistant to oils and chemicals."

Revise the Aerial Electric Cable Properties table of Article 1066.03(a)(3) to read:

Aerial Electric Cable Properties

Phase Conductor				Messenger wire	
Size AWG	Stranding	Average Insulation Thickness		Minimum Size AWG	Stranding
		mm	mils		
6	7	1.1	(45)	6	6/1
4	7	1.1	(45)	4	6/1
2	7	1.1	(45)	2	6/1
1/0	19	1.5	(60)	1/0	6/1
2/0	19	1.5	(60)	2/0	6/1
3/0	19	1.5	(60)	3/0	6/1
4/0	19	1.5	(60)	4/0	6/1

Add the following to Article 1066.03(b) of the Standard Specifications:

"Cable sized No. 2 AWG and smaller shall be U.L. listed Type RHH/RHW and may be Type RHH/RHW/USE. Cable sized larger than No. 2 AWG shall be U.L. listed Type RHH/RHW/USE."

Revise Article 1066.04 to read:

"Aerial Cable Assembly. The aerial cable shall be an assembly of insulated aluminum conductors according to Section 1066.02 and 1066.03. Unless otherwise indicated, the cable assembly shall be composed of three insulated conductors and a steel reinforced bare aluminum conductor (ACSR) to be used as the ground conductor. Unless otherwise indicated, the code word designation of this cable assembly is "Palomino". The steel reinforced aluminum conductor shall conform to ASTM B-232. The cable shall be assembled according to ANSI/ICEA S-76-474."

Revise the second paragraph of Article 1066.05 to read:

> "The tape shall have reinforced metallic detection capabilities consisting of a woven reinforced polyethylene tape with a metallic core or backing."

HEAT OF HYDRATION CONTROL FOR CONCRETE STRUCTURES (D-1)

Effective: November 1, 2013

Article 1020.15 shall not apply.

BDE SPECIAL PROVISIONS
For the January 17 and March 7, 2014 Lettings

The following special provisions indicated by an "x" are applicable to this contract and will be included by the Project Development and Implementation Section of the BD&E. An * indicates a new or revised special provision for the letting.

File Name	#		Special Provision Title	Effective	Revised
80240	1		Above Grade Inlet Protection	July 1, 2009	Jan. 1, 2012
* 80099	2		Accessible Pedestrian Signals (APS)	April 1, 2003	Jan. 1, 2014
80274	3		Aggregate Subgrade Improvement	April 1, 2012	Jan. 1, 2013
80192	4		Automated Flagger Assistance Device	Jan. 1, 2008	
80173	5		Bituminous Materials Cost Adjustments	Nov. 2, 2006	Aug. 1, 2013
80241	6		Bridge Demolition Debris	July 1, 2009	
5026I	7		Building Removal-Case I (Non-Friable and Friable Asbestos)	Sept. 1, 1990	April 1, 2010
5048I	8		Building Removal-Case II (Non-Friable Asbestos)	Sept. 1, 1990	April 1, 2010
5049I	9		Building Removal-Case III (Friable Asbestos)	Sept. 1, 1990	April 1, 2010
5053I	10		Building Removal-Case IV (No Asbestos)	Sept. 1, 1990	April 1, 2010
80292	11		Coarse Aggregate in Bridge Approach Slabs/Footings	April 1, 2012	April 1, 2013
80310	12		Coated Galvanized Steel Conduit	Jan. 1, 2013	
80198	13		Completion Date (via calendar days)	April 1, 2008	
80199	14		Completion Date (via calendar days) Plus Working Days	April 1, 2008	
80293	15		Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ 5 Feet	April 1, 2012	
80294	16		Concrete Box Culverts with Skews ≤ 30 Degrees Regardless of Design Fill and Skews > 30 Degrees with Design Fills > 5 Feet	April 1, 2012	
80311	17		Concrete End Sections for Pipe Culverts	Jan. 1, 2013	
* 80277	18		Concrete Mix Design – Department Provided	Jan. 1, 2012	Jan. 1, 2014
* 80261	19		Construction Air Quality – Diesel Retrofit	June 1, 2010	Jan. 1, 2014
80029	20		Disadvantaged Business Enterprise Participation	Sept. 1, 2000	Aug. 2, 2011
80265	21		Friction Aggregate	Jan. 1, 2011	
80229	22		Fuel Cost Adjustment	April 1, 2009	July 1, 2009
* 80329	23		Glare Screen	Jan. 1, 2014	
80303	24		Granular Materials	Nov. 1, 2012	
80304	25		Grooving for Recessed Pavement Markings	Nov. 1, 2012	Jan. 1, 2013
80246	26	✓	Hot-Mix Asphalt – Density Testing of Longitudinal Joints	Jan. 1, 2010	April 1, 2012
80322	27		Hot-Mix Asphalt – Mixture Design Composition and Volumetric Requirements	Nov. 1, 2013	
80323	28		Hot-Mix Asphalt – Mixture Design Verification and Production	Nov. 1, 2013	
80315	29		Insertion Lining of Culverts	Jan. 1, 2013	Nov. 1, 2013
80324	30		LRFD Pipe Culvert Burial Tables	Nov. 1, 2013	
80325	31	✓	LRFD Storm Sewer Burial Tables	Nov. 1, 2013	
80045	32		Material Transfer Device	June 15, 1999	Jan. 1, 2009
80165	33		Moisture Cured Urethane Paint System	Nov. 1, 2006	Jan. 1, 2010
* 80330	34		Pavement Marking for Bike Symbol	Jan. 1, 2014	
80298	35		Pavement Marking Tape Type IV	April 1, 2012	
80254	36		Pavement Patching	Jan. 1, 2010	
* 80331	37	✓	Payrolls and Payroll Records	Jan. 1, 2014	
* 80332	38		Portland Cement Concrete – Curing of Abutments and Piers	Jan. 1, 2014	
80326	39	✓	Portland Cement Concrete Equipment	Nov. 1, 2013	
80300	40		Preformed Plastic Pavement Marking Type D - Inlaid	April 1, 2012	
* 80328	41		Progress Payments	Nov. 2, 2013	
* 80251	42	✓	Quality Control/Quality Assurance of Concrete Mixtures	Jan. 1, 2012	Nov. 1, 2013
3426I	43		Railroad Protective Liability Insurance	Dec. 1, 1986	Jan. 1, 2006
80157	44		Railroad Protective Liability Insurance (5 and 10)	Jan. 1, 2006	

File Name	#		Special Provision Title	Effective	Revised
80306	45		Reclaimed Asphalt Pavement (RAP) and Reclaimed Asphalt Shingles (RAS)	Nov. 1, 2012	Nov. 1, 2013
80327	46		Reinforcement Bars	Nov. 1, 2013	
80283	47	✓	Removal and Disposal of Regulated Substances	Jan. 1, 2012	Nov. 2, 2012
80319	48	✓	Removal and Disposal of Surplus Materials	Nov. 2, 2012	
80307	49		Seeding	Nov. 1, 2012	
80127	50		Steel Cost Adjustment	April 2, 2004	April 1, 2009
80317	51		Surface Testing of Hot-Mix Asphalt Overlays	Jan. 1, 2013	
80301	52		Tracking the Use of Pesticides	Aug. 1, 2012	
* 80333	53		Traffic Control Setup and Removal Freeway/Expressway	Jan. 1, 2014	
20338	54		Training Special Provisions	Oct. 15, 1975	
80318	55		Traversable Pipe Grate	Jan. 1, 2013	April 1, 2013
80288	56	✓	Warm Mix Asphalt	Jan. 1, 2012	Nov. 1, 2013
80302	57	✓	Weekly DBE Trucking Reports	June 2, 2012	
80289	58		Wet Reflective Thermoplastic Pavement Marking	Jan. 1, 2012	
80071	59		Working Days	Jan. 1, 2002	

The following special provisions are in the 2014 Supplemental Specifications and Recurring Special Provisions:

File Name	Special Provision Title	New Location	Effective	Revised
80309	Anchor Bolts	Articles 1006.09, 1070.01, and 1070.03	Jan. 1, 2013	
80276	Bridge Relief Joint Sealer	Article 503.19 and Sections 588 and 589	Jan. 1, 2012	Aug. 1, 2012
80312	Drain Pipe, Tile, Drainage Mat, and Wall Drain	Article 101.01, 1040.03, and 1040.04	Jan. 1, 2013	
80313	Fabric Bearing Pads	Article 1082.01	Jan. 1, 2013	
80169	High Tension Cable Median Barrier	Section 644 and Article 1106.02	Jan. 1, 2007	Jan. 1, 2013
✓80320	Liquidated Damages	Article 108.09	April 1, 2013	
80297	Modified Urethane Pavement Marking	Section 780, Articles 1095.09 and 1105.04	April 1, 2012	
80253	Movable Traffic Barrier	Section 707 and Article 1106.02	Jan. 1, 2010	Jan. 1, 2013
80231	Pavement Marking Removal	Recurring CS #33	April 1, 2009	
80321	Pavement Removal	Article 440.07	April 1, 2013	
✓80022	Payments to Subcontractors	Article 109.11	June 1, 2000	Jan. 1, 2006
80316	Placing and Consolidating Concrete	Articles 503.06, 503.07, and 516.12	Jan. 1, 2013	
✓80278	Planting Woody Plants	Section 253 and Article 1081.01	Jan. 1, 2012	Aug. 1, 2012
80305	Polyurea Pavement Markings	Article 780.14	Nov. 1, 2012	Jan. 1, 2013
✓80279	Portland Cement Concrete	Sections 312, 503, 1003, 1004, 1019, and 1020	Jan. 1, 2012	Nov. 1, 2013
80218	Preventive Maintenance – Bituminous Surface Treatment	Recurring CS #34	Jan. 1, 2009	April 1, 2012
80219	Preventive Maintenance – Cape Seal	Recurring CS #35	Jan. 1, 2009	April 1, 2012
80220	Preventive Maintenance – Micro-Surfacing	Recurring CS #36	Jan. 1, 2009	April 1, 2012
80221	Preventive Maintenance – Slurry Seal	Recurring CS #37	Jan. 1, 2009	April 1, 2012
80224	Restoring Bridge Approach Pavements Using High-Density Foam	Recurring CS #39	Jan. 1, 2009	Jan. 1, 2012
80255	Stone Matrix Asphalt	Sections 406, 1003, 1004, 1030, and 1011	Jan. 1, 2010	Aug. 1, 2013
80143	Subcontractor Mobilization Payments	Article 109.12	April 2, 2005	April 1, 2011

File Name	Special Provision Title	New Location	Effective	Revised
80308	Synthetic Fibers in Concrete Gutter, Curb, Median and Paved Ditch	Articles 606.02 and 606.11	Nov. 1, 2012	
80286	Temporary Erosion and Sediment Control	Articles 280.04 and 280.08	Jan. 1, 2012	
80225	Temporary Raised Pavement Marker	Recurring CS #38	Jan. 1, 2009	
80256	Temporary Water Filled Barrier	Section 708 and Article 1106.02	Jan. 1, 2010	Jan. 1, 2013
80273	Traffic Control Deficiency Deduction	Article 105.03	Aug. 1, 2011	
80270	Utility Coordination and Conflicts	Articles 105.07, 107.19, 107.31, 107.37, 107.38, 107.39 and 107.40	April 1, 2011	Jan. 1, 2012

The following special provisions require additional information from the designer. The additional information needs to be included in a separate document attached to this check sheet. The Project Development and Implementation section will then include the information in the applicable special provision. The Special Provisions are:

- Bridge Demolition Debris
- Building Removal-Case I
- Building Removal-Case II
- Building Removal-Case III
- Building Removal-Case IV
- Completion Date
- Completion Date Plus Working Days
- DBE Participation
- Material Transfer Device
- Railroad Protective Liability Insurance
- Training Special Provisions
- Working Days

QUALITY CONTROL/QUALITY ASSURANCE OF CONCRETE MIXTURES (BDE)

Effective: January 1, 2012
Revised: January 1, 2014

Revise Note 7/ of Schedule B of Recurring Special Provision Check Sheet #31 of the Standard Specifications to read:

7/ The test of record for strength shall be the day indicated in Article 1020.04. For cement aggregate mixture II, a strength requirement is not specified and testing is not required. Additional strength testing to determine early falsework and form removal, early pavement or bridge opening to traffic, or to monitor strengths is at the discretion of the Contractor. Strength shall be defined as the average of two 6 x 12 in. (150 x 300 mm) cylinder breaks, three 4 x 8 in. (100 x 200 mm) cylinder breaks, or two beam breaks for field tests. Per Illinois Modified AASHTO T 23, cylinders shall be 6 x 12 in. (150 x 300 mm) when the nominal maximum size of the coarse aggregate exceeds 1 in. (25 mm).

80281

REMOVAL AND DISPOSAL OF SURPLUS MATERIALS (BDE)

Effective: November 2, 2012

Revise the first four paragraphs of Article 202.03 of the Standard Specifications to read:

"**202.03 Removal and Disposal of Surplus, Unstable, Unsuitable, and Organic Materials.** Suitable excavated materials shall not be wasted without permission of the Engineer. The Contractor shall dispose of all surplus, unstable, unsuitable, and organic materials, in such a manner that public or private property will not be damaged or endangered.

Suitable earth, stones and boulders naturally occurring within the right-of-way may be placed in fills or embankments in lifts and compacted according to Section 205. Broken concrete without protruding metal bars, bricks, rock, stone, reclaimed asphalt pavement with no expansive aggregate, or uncontaminated dirt and sand generated from construction or demolition activities may be used in embankment or in fill. If used in fills or embankments, these materials shall be placed and compacted to the satisfaction of the Engineer; shall be buried under a minimum of 2 ft (600 mm) of earth cover (except when the materials include only uncontaminated dirt); and shall not create an unsightly appearance or detract from the natural topographic features of an area. Broken concrete without protruding metal bars, bricks, rock, or stone may be used as riprap as approved by the Engineer. If the materials are used for fill in locations within the right-of-way but outside project construction limits, the Contractor must specify to the Engineer, in writing, how the landscape restoration of the fill areas will be accomplished. Placement of fill in such areas shall not commence until the Contractor's landscape restoration plan is approved by the Engineer.

Aside from the materials listed above, all other construction and demolition debris or waste shall be disposed of in a licensed landfill, recycled, reused, or otherwise disposed of as allowed by State or Federal laws and regulations. When the Contractor chooses to dispose of uncontaminated soil at a clean construction and demolition debris (CCDD) facility or at an uncontaminated soil fill operation, it shall be the Contractor's responsibility to have the pH of the material tested to ensure the value is between 6.25 and 9.0, inclusive. A copy of the pH test results shall be provided to the Engineer.

A permit shall be obtained from IEPA and made available to the Engineer prior to open burning of organic materials (i.e., plant refuse resulting from pruning or removal of trees or shrubs) or other construction or demolition debris. Organic materials originating within the right-of-way limits may be chipped or shredded and placed as mulch around landscape plantings within the right-of-way when approved by the Engineer. Chipped or shredded material to be placed as mulch shall not exceed a depth of 6 in. (150 mm)."

80319

REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES (BDE)

Effective: January 1, 2012
Revised: November 2, 2012

Revise Article 669.01 of the Standard Specifications to read:

"**669.01 Description.** This work shall consist of the transportation and proper disposal of contaminated soil and water. This work shall also consist of the removal, transportation, and proper disposal of underground storage tanks (UST), their content and associated underground piping to the point where the piping is above the ground, including determining the content types and estimated quantities."

Revise Article 669.08 of the Standard Specifications to read:

"**669.08 Contaminated Soil and/or Groundwater Monitoring.** The Contractor shall hire a qualified environmental firm to monitor the area containing the regulated substances. The affected area shall be monitored with a photoionization detector (PID) utilizing a lamp of 10.6eV or greater or a flame ionization detector (FID). Any field screen reading on the PID or FID in excess of background levels indicates the potential presence of contaminated material requiring handling as a non-special waste, special waste, or hazardous waste. No excavated soils can be taken to a clean construction and demolition debris (CCDD) facility or an uncontaminated soil fill operation with detectable PID or FID meter readings that are above background. The PID or FID meter shall be calibrated on-site and background level readings taken and recorded daily. All testing shall be done by a qualified engineer/technician. Such testing and monitoring shall be included in the work. The Contractor shall identify the exact limits of removal of non-special waste, special waste, or hazardous waste. All limits shall be approved by the Engineer prior to excavation. The Contractor shall take all necessary precautions.

Based upon the land use history of the subject property and/or PID or FID readings indicating contamination, a soil or groundwater sample shall be taken from the same location and submitted to an approved laboratory. Soil or groundwater samples shall be analyzed for the contaminants of concern, including pH, based on the property's land use history or the parameters listed in the maximum allowable concentration (MAC) for chemical constituents in uncontaminated soil established pursuant to Subpart F of 35 Illinois Administrative Code 1100.605. The analytical results shall serve to document the level of soil contamination. Soil and groundwater samples may be required at the discretion of the Engineer to verify the level of soil and groundwater contamination.

Samples shall be grab samples (not combined with other locations). The samples shall be taken with decontaminated or disposable instruments. The samples shall be placed in sealed containers and transported in an insulated container to the laboratory. The container shall maintain a temperature of 39 °F (4 °C). All samples shall be clearly labeled. The labels shall indicate the sample number, date sampled, location and elevation, and any other observations.

The laboratory shall use analytical methods which are able to meet the lowest appropriate practical quantitation limits (PQL) or estimated quantitation limit (EQL) specified in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods", EPA Publication No. SW-846 and "Methods for the Determination of Organic Compounds in Drinking Water", EPA, EMSL, EPA-600/4-88/039. For parameters where the specified cleanup objective is below the acceptable detection limit (ADL), the ADL shall serve as the cleanup objective. For other parameters the ADL shall be equal to or below the specified cleanup objective."

Replace the first two paragraphs of Article 669.09 of the Standard Specifications with the following:

"**669.09 Contaminated Soil and/or Groundwater Management and Disposal.** The management and disposal of contaminated soil and/or groundwater shall be according to the following:

(a) Soil Analytical Results Exceed Most Stringent MAC. When the soil analytical results indicate that detected levels exceed the most stringent maximum allowable concentration (MAC) for chemical constituents in uncontaminated soil established pursuant to Subpart F of 35 Illinois Administrative Code 1100.605, the soil shall be managed as follows:

(1) When analytical results indicate inorganic chemical constituents exceed the most stringent MAC but they are still considered within area background levels by the Engineer, the excavated soil can be utilized within the construction limits as fill, when suitable. Such soil excavated for storm sewers can be placed back into the excavated trench as backfill, when suitable, unless trench backfill is specified. If the soils cannot be utilized within the construction limits, they shall be managed and disposed of off-site as a non-special waste, special waste, or hazardous waste as applicable.

(2) When analytical results indicate chemical constituents exceed the most stringent MAC but do not exceed the MAC for a Metropolitan Statistical Area (MSA) County, the excavated soil can be utilized within the construction limits as fill, when suitable, or managed and disposed of off-site as "uncontaminated soil" at a CCDD facility or an uncontaminated soil fill operation within an MSA County provided the pH of the soil is within the range of 6.25 - 9.0, inclusive.

(3) When analytical results indicate chemical constituents exceed the most stringent MAC but do not exceed the MAC for an MSA County excluding Chicago, or the MAC within the Chicago corporate limits, the excavated soil can be utilized within the construction limits as fill, when suitable, or managed and disposed of off-site as "uncontaminated soil" at a CCDD facility or an uncontaminated soil fill operation within an MSA County excluding Chicago or within the Chicago corporate limits provided the pH of the soil is within the range of 6.25 - 9.0, inclusive.

(4) When analytical results indicate chemical constituents exceed the most stringent MAC but do not exceed the MAC for an MSA County excluding Chicago, the excavated soil can be utilized within the construction limits as fill, when suitable, or managed and disposed of off-site as "uncontaminated soil" at a CCDD facility or an uncontaminated soil fill operation within an MSA County excluding Chicago provided the pH of the soil is within the range of 6.25 - 9.0, inclusive.

(5) When the Engineer determines soil cannot be managed according to Articles 669.09(a)(1) through (a)(4) above, the soil shall be managed and disposed of off-site as a non-special waste, special waste, or hazardous waste as applicable.

(b) Soil Analytical Results Do Not Exceed Most Stringent MAC. When the soil analytical results indicate that detected levels do not exceed the most stringent MAC but the pH of the soil is less than 6.25 or greater than 9.0, the excavated soil can be utilized within the construction limits or managed and disposed of off-site as "uncontaminated soil" according to Article 202.03. However the excavated soil cannot be taken to a CCDD facility or an uncontaminated soil fill operation.

(c) Groundwater. When groundwater analytical results indicate the detected levels are above Appendix B, Table E of 35 Illinois Administrative Code 742, the most stringent Tier 1 Groundwater Remediation Objectives for Groundwater Component of the Groundwater Ingestion Route for Class 1 groundwater, the groundwater shall be managed off-site as a special waste.

All groundwater encountered within lateral trenches may be managed within the trench and allowed to infiltrate back into the ground. If the groundwater cannot be managed within the trench it must be removed as a special or hazardous waste. The Contractor is prohibited from managing groundwater within the trench by discharging it through any existing or new storm sewer. The Contractor shall install backfill plugs within the area of groundwater contamination.

One backfill plug shall be placed down gradient to the area of groundwater contamination. Backfill plugs shall be installed at intervals not to exceed 50 ft (15 m). Backfill plugs are to be 4 ft (1.2 m) long, measured parallel to the trench, full trench width and depth. Backfill plugs shall not have any fine aggregate bedding or backfill, but shall be entirely cohesive soil or any class of concrete. The Contractor shall provide test data that the material has a permeability of less than 10^{-7} cm/sec according to ASTM D 5084, Method A or per another test method approved by the Engineer."

Revise Article 669.14 of the Standard Specifications to read:

"**669.14 Final Environmental Construction Report.** At the end of the project, the Contractor will prepare and submit three copies of the Environmental Construction Report on the activities conducted during the life of the project, one copy shall be submitted to the Resident Engineer, one copy shall be submitted to the District's Environmental Studies Unit, and one copy shall be submitted with an electronic copy in Adode.pdf format to the Geologic

and Waste Assessment Unit, Bureau of Design and Environment, IDOT, 2300 South Dirksen Parkway, Springfield, Illinois 62764. The technical report shall include all pertinent information regarding the project including, but not limited to:

(a) Measures taken to identify, monitor, handle, and dispose of soil or groundwater containing regulated substances, to prevent further migration of regulated substances, and to protect workers,

(b) Cost of identifying, monitoring, handling, and disposing of soil or groundwater containing regulated substances, the cost of preventing further migration of regulated substances, and the cost for worker protection from the regulated substances. All cost should be in the format of the contract pay items listed in the contract plans (identified by the preliminary environmental site investigation (PESA) site number),

(c) Plan sheets showing the areas containing the regulated substances,

(d) Field sampling and testing results used to identify the nature and extent of the regulated substances,

(e) Waste manifests (identified by the preliminary environmental site investigation (PESA) site number) for special or hazardous waste disposal, and

(f) Landfill tickets (identified by the preliminary environmental site investigation (PESA) site number) for non-special waste disposal."

Revise the second paragraph of Article 669.16 of the Standard Specifications to read:

"The transportation and disposal of soil and other materials from an excavation determined to be contaminated will be paid for at the contract unit price per cubic yard (cubic meter) for NON-SPECIAL WASTE DISPOSAL, SPECIAL WASTE DISPOSAL, or HAZARDOUS WASTE DISPOSAL."

80283

LIQUIDATED DAMAGES (BDE)

Effective: April 1, 2013

Revise the table in Article 108.09 of the Standard Specifications to read:

"Schedule of Deductions for Each Day of Overrun in Contract Time			
Original Contract Amount		Daily Charges	
From More Than	To and Including	Calendar Day	Work Day
$ 0	$ 100,000	$ 475	$ 675
100,000	500,000	750	1,050
500,000	1,000,000	1,025	1,425
1,000,000	3,000,000	1,275	1,725
3,000,000	6,000,000	1,425	2,000
6,000,000	12,000,000	2,300	3,450
12,000,000	And over	6,775	9,525"

80320

LRFD STORM SEWER BURIAL TABLES (BDE)

Effective: November 1, 2013

Revise Article 550.02 of the Standard Specifications to read as follows:

"Item	Article Section
(a) Clay Sewer Pipe	1040.02
(b) Extra Strength Clay Pipe	1040.02
(c) Concrete Sewer, Storm Drain, and Culvert Pipe	1042
(d) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe	1042
(e) Reinforced Concrete Elliptical Culvert, Storm Drain,and Sewer Pipe (Note 1)	1042
(f) Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe (Note 1)	1042
(g) Polyvinyl Chloride (PVC) Pipe	1040.03
(h) Corrugated Polyvinyl Chloride (PVC) Pipe with a Smooth Interior	1040.03
(i) Corrugated Polypropylene (CPP) Pipe with Smooth Interior	1040.07
(j) Rubber Gaskets and Preformed Flexible Joint Sealants for Concrete Pipe	1056
(k) Mastic Joint Sealer for Pipe	1055
(l) External Sealing Band	1057
(m) Fine Aggregate (Note 2)	1003.04
(n) Coarse Aggregate (Note 3)	1004.05
(o) Reinforcement Bars and Welded Wire Fabric	1006.10
(p) Handling Hole Plugs	1042.16
(q) Polyethylene (PE) Pipe with a Smooth Interior	1040.04
(r) Corrugated Polyethylene (PE) Pipe with a Smooth Interior	1040.04

Note 1. The class of elliptical and arch pipe used for various storm sewer sizes and heights of fill shall conform to the requirements for circular pipe.

Note 2. The fine aggregate shall be moist.

Note 3. The coarse aggregate shall be wet."

Revise the table for permitted materials in Article 550.03 of the Standard Specifications as follows:

"Class	**Materials**
A	Rigid Pipes: Clay Sewer Pipe Extra Strength Clay Pipe Concrete Sewer, Storm Drain, and Culvert Pipe Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe
B	Rigid Pipes: Clay Sewer Pipe Extra Strength Clay Pipe Concrete Sewer, Storm Drain, and Culvert Pipe Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe Flexible Pipes: Polyvinyl Chloride (PVC) Pipe Corrugated Polyvinyl Chloride Pipe (PVC) with a Smooth Interior Polyethylene (PE) Pipe with a Smooth Interior Corrugated Polyethylene (PE) Pipe with a Smooth Interior Corrugated Polypropylene (CPP) Pipe with a Smooth Interior"

Replace the storm sewers tables in Article 550.03 of the Standard Specifications with the following:

STORM SEWERS
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE

Nominal Diameter in.	Type 1								Type 2							
	Fill Height: 3' and less With 1' minimum cover								Fill Height: Greater than 3' not exceeding 10'							
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP
10	NA	3	X	X	X	X	X	NA	NA	1	*X	X	X	X	X	NA
12	IV	NA	X	X	X	X	X	X	II	1	*X	X	X	X	X	X
15	IV	NA	NA	X	X	NA	X	X	II	1	*X	X	X	NA	X	X
18	IV	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
21	III	NA	NA	X	X	NA	NA	NA	II	2	X	X	X	NA	NA	NA
24	III	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
27	III	NA	NA	NA	NA	NA	NA	NA	II	3	X	NA	NA	NA	NA	NA
30	IV	NA	NA	X	X	X	X	X	II	3	X	X	X	X	X	X
33	III	NA	NA	NA	NA	NA	NA	NA	II	NA	X	NA	NA	NA	NA	NA
36	III	NA	NA	X	X	X	X	X	II	NA	X	X	X	X	NA	X
42	II	NA	X	X	NA	X	X	NA	II	NA	X	X	NA	X	NA	NA
48	II	NA	X	X	NA	X	X	X	II	NA	X	X	NA	X	NA	NA
54	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
60	II	NA	NA	NA	NA	NA	NA	X	II	NA	NA	NA	NA	NA	NA	X
66	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
72	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
78	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
84	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
90	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
96	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
102	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
108	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
CSP Concrete Sewer, Storm drain, and Culvert Pipe
PVC Polyvinyl Chloride Pipe
CPVC Corrugated Polyvinyl Chloride Pipe
ESCP Extra Strength Clay Pipe
PE Polyethylene Pipe with a Smooth Interior
CPE Corrugated Polyethylene Pipe with a Smooth Interior
CPP Corrugated Polypropylene pipe with a Smooth Interior

X This material may be used for the given pipe diameter and fill height.
NA This material is Not Acceptable for the given pipe diameter and fill height.
* May also use Standard Strength Clay Pipe

STORM SEWERS (Metric)
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE

Nominal Diameter in.	Type 1								Type 2							
	Fill Height: 1 m' and less With 300 mm minimum cover								Fill Height: Greater than 1 m not exceeding 3 m							
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP
250	NA	3	X	X	X	X	X	NA	NA	1	*X	X	X	X	X	NA
300	IV	NA	X	X	X	X	X	X	II	1	*X	X	X	X	X	X
375	IV	NA	NA	X	X	NA	X	X	II	1	*X	X	X	NA	X	X
450	IV	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
525	III	NA	NA	X	X	NA	NA	NA	II	2	X	X	X	NA	NA	NA
600	III	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
675	III	NA	NA	NA	NA	NA	NA	NA	II	3	X	NA	NA	NA	NA	NA
750	IV	NA	NA	X	X	X	X	X	II	3	X	X	X	X	X	X
825	III	NA	NA	NA	NA	NA	NA	NA	II	NA	X	NA	NA	NA	NA	NA
900	III	NA	NA	X	X	X	X	X	II	NA	X	X	X	X	NA	X
1050	II	NA	X	X	NA	X	X	NA	II	NA	X	X	NA	X	NA	NA
1200	II	NA	X	X	NA	X	X	X	II	NA	X	X	NA	X	NA	NA
1350	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
1500	II	NA	NA	NA	NA	NA	NA	X	II	NA	NA	NA	NA	NA	NA	X
1650	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
1800	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
1950	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
2100	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
2250	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
2400	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
2550	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
2700	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
CSP Concrete Sewer, Storm drain, and Culvert Pipe
PVC Polyvinyl Chloride Pipe
CPVC Corrugated Polyvinyl Chloride Pipe
ESCP Extra Strength Clay Pipe
PE Polyethylene Pipe with a Smooth Interior
CPE Corrugated Polyethylene Pipe with a Smooth Interior
CPP Corrugated Polypropylene pipe with a Smooth Interior
X This material may be used for the given pipe diameter and fill height.
NA This material is Not Acceptable for the given pipe diameter and fill height.
* May also use Standard Strength Clay Pipe

STORM SEWERS
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE

Nominal Diameter in.	Type 3								Type 4						
	Fill Height: Greater than 10' not exceeding 15'								Fill Height: Greater than 15' not exceeding 20'						
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPP
10	NA	2	X	X	X	X	X	NA	NA	3	X	X	X	X	NA
12	III	2	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
15	III	3	X	X	X	NA	NA	X	IV	NA	NA	X	X	NA	X
18	III	NA	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
21	III	NA	NA	X	X	NA	NA	NA	IV	NA	NA	X	X	NA	NA
24	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA
27	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
30	III	NA	NA	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
33	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
36	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA
42	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA
48	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA
54	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
60	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
66	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
72	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
78	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
84	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
90	III	NA	NA	NA	NA	NA	NA	NA	1680	NA	NA	NA	NA	NA	NA
96	III	NA	NA	NA	NA	NA	NA	NA	1690	NA	NA	NA	NA	NA	NA
102	IV	NA	NA	NA	NA	NA	NA	NA	1700	NA	NA	NA	NA	NA	NA
108	1360	NA	NA	NA	NA	NA	NA	NA	1710	NA	NA	NA	NA	NA	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
CSP Concrete Sewer, Storm drain, and Culvert Pipe
PVC Polyvinyl Chloride Pipe
CPVC Corrugated Polyvinyl Chloride Pipe
ESCP Extra Strength Clay Pipe
PE Polyethylene Pipe with a Smooth Interior
CPE Corrugated Polyethylene Pipe with a Smooth Interior
CPP Corrugated Polypropylene pipe with a Smooth Iinterior
X This material may be used for the given pipe diameter and fill height.
NA This material is Not Acceptable for the given pipe diameter and fill height.
* May also use Standard Strength Clay Pipe
Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the D-load to produce a 0.01 in crack.

STORM SEWERS (metric)
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE

Nominal Diameter in.	Type 3								Type 4						
	Fill Height: Greater than 3 m not exceeding 4.5 m								Fill Height: Greater than 4.5 m not exceeding 6 m						
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPP
250	NA	2	X	X	X	X	X	NA	NA	3	X	X	X	X	NA
300	III	2	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
375	III	3	X	X	X	NA	NA	X	IV	NA	NA	X	X	NA	X
450	III	NA	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
525	III	NA	NA	X	X	NA	NA	NA	IV	NA	NA	X	X	NA	NA
600	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA
675	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
750	III	NA	NA	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
825	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
900	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA
1050	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA
1200	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA
1350	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
1500	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
1650	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
1800	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
1950	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
2100	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
2250	III	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA
2400	III	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA
2550	IV	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA
2700	70	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
CSP Concrete Sewer, Storm drain, and Culvert Pipe
PVC Polyvinyl Chloride Pipe
CPVC Corrugated Polyvinyl Chloride Pipe
ESCP Extra Strength Clay Pipe
PE Polyethylene Pipe with a Smooth Interior
CPE Corrugated Polyethylene Pipe with a Smooth Interior
CPP Corrugated Polypropylene pipe with a Smooth Interior
X This material may be used for the given pipe diameter and fill height.
NA This material is Not Acceptable for the given pipe diameter and fill height.
* May also use Standard Strength Clay Pipe
Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the metric D-load to produce a 25.4 micro-meter crack.

STORM SEWERS KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE								
Nominal Diameter in.	Type 5			Type 6			Type 7	
	Fill Height: Greater than 20' not exceeding 25'			Fill Height: Greater than 25' not exceeding 30'			Fill Height: Greater than 30' not exceeding 35'	
	RCCP	PVC	CPVC	RCCP	PVC	CPVC	RCCP	CPVC
10	NA	X	X	NA	X	X	NA	X
12	IV	X	X	V	X	X	V	X
15	IV	X	X	V	X	X	V	X
18	IV	X	X	V	X	X	V	X
21	IV	X	X	V	X	X	V	X
24	IV	X	X	V	X	X	V	X
27	IV	NA	NA	V	NA	NA	V	NA
30	IV	X	X	V	X	X	V	X
33	IV	NA	NA	V	NA	NA	V	NA
36	IV	X	X	V	X	X	V	X
42	IV	X	NA	V	X	NA	V	NA
48	IV	X	NA	V	X	NA	V	NA
54	IV	NA	NA	V	NA	NA	V	NA
60	IV	NA	NA	V	NA	NA	V	NA
66	IV	NA	NA	V	NA	NA	V	NA
72	V	NA	NA	V	NA	NA	V	NA
78	2020	NA	NA	2370	NA	NA	2730	NA
84	2020	NA	NA	2380	NA	NA	2740	NA
90	2030	NA	NA	2390	NA	NA	2750	NA
96	2040	NA	NA	2400	NA	NA	2750	NA
102	2050	NA	NA	2410	NA	NA	2760	NA
108	2060	NA	NA	2410	NA	NA	2770	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
PVC Polyvinyl Chloride Pipe
CPVC Corrugated Polyvinyl Chloride Pipe
ESCP Extra Strength Clay Pipe
X This material may be used for the given pipe diameter and fill height.
NA This material is Not Acceptable for the given pipe diameter and fill height.
Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the D-load to produce a 0.01 in crack.

STORM SEWERS (metric)
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE

Nominal Diameter in.	Type 5			Type 6			Type 7	
	Fill Height: Greater than 20' not exceeding 25'			Fill Height: Greater than 25' not exceeding 30'			Fill Height: Greater than 30' not exceeding 35'	
	RCCP	PVC	CPVC	RCCP	PVC	CPVC	RCCP	CPVC
250	NA	X	X	NA	X	X	NA	X
300	IV	X	X	V	X	X	V	X
375	IV	X	X	V	X	X	V	X
450	IV	X	X	V	X	X	V	X
525	IV	X	X	V	X	X	V	X
600	IV	X	X	V	X	X	V	X
675	IV	NA	NA	V	NA	NA	V	NA
750	IV	X	X	V	X	X	V	X
825	IV	NA	NA	V	NA	NA	V	NA
900	IV	X	X	V	X	X	V	X
1050	IV	X	NA	V	X	NA	V	NA
1200	IV	X	NA	V	X	NA	V	NA
1350	IV	NA	NA	V	NA	NA	V	NA
1500	IV	NA	NA	V	NA	NA	V	NA
1650	IV	NA	NA	V	NA	NA	V	NA
1800	V	NA	NA	V	NA	NA	V	NA
1950	100	NA	NA	110	NA	NA	130	NA
2100	100	NA	NA	110	NA	NA	130	NA
2250	100	NA	NA	110	NA	NA	130	NA
2400	100	NA	NA	120	NA	NA	130	NA
2550	100	NA	NA	120	NA	NA	130	NA
2700	100	NA	NA	120	NA	NA	130	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
PVC Polyvinyl Chloride Pipe
CPVC Corrugated Polyvinyl Chloride Pipe
ESCP Extra Strength Clay Pipe
X This material may be used for the given pipe diameter and fill height.
NA This material is Not Acceptable for the given pipe diameter and fill height.
Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the metric D-load to produce a 25.4 micro-meter crack.

Revise the sixth paragraph of Article 550.06 of the Standard Specifications to read:

"PVC, PE and CPP pipes shall be joined according to the manufacturer's specifications."

Revise the first and second paragraphs of Article 550.08 of the Standard Specifications to read:

"**550.08 Deflection Testing for Storm Sewers.** All PVC, PE, and CPP storm sewers shall be tested for deflection not less than 30 days after the pipe is installed and the backfill compacted. The testing shall be performed in the presence of the Engineer.

For PVC, PE, and CPP storm sewers with diameters 24 in. (600 mm) or smaller, a mandrel drag shall be used for deflection testing. For PVC, PE, and CPP storm sewers with diameters over 24 in. (600 mm), deflection measurements other than by a mandrel shall be used."

Revise the fifth paragraph of Article 550.08 to read as follows.

"The outside diameter of the mandrel shall be 95 percent of the base inside diameter. For all PVC pipe the base inside diameter shall be defined using ASTM D 3034 methodology. For all PE and CPP pipe, the base inside diameter shall be defined as the average inside diameter based on the minimum and maximum tolerances specified in the corresponding ASTM or AASHTO material specifications."

Revise the first paragraph of Article 1040.03 of the Standard Specifications to read:

"**1040.03 Polyvinyl Chloride (PVC) Pipe.** Acceptance testing of PVC pipe and fittings shall be accomplished during the same construction season in which they are installed. The section properties shall be according to the manufacturer pre-submitted geometric properties on file with the Department. The manufacturer shall submit written certification that the material meets those properties. The pipe shall meet the following additional requirements."

Delete Articles 1040.03(e) and (f) of the Standard Specifications.

Revise Articles 1040.04(c) and (d) of the Standard Specifications to read:

"(c) PE Profile Wall Pipe for Insertion Lining. The pipe shall be according to ASTM F 894. When used for insertion lining of pipe culverts, the pipe liner shall have a minimum pipe stiffness of 46 psi (317 kPa) at five percent deflection for nominal inside diameters of 42 in. (1050 mm) or less. For nominal inside diameters of greater than 42 in. (1050 mm), the pipe liner shall have a minimum pipe stiffness of 32.5 psi (225 kPa) at five percent deflection. All sizes shall have wall construction that presents essentially smooth internal and external surfaces.

(d) PE Pipe with a Smooth Interior. The pipe shall be according to ASTM F 714 (DR 32.5) with a minimum cell classification of PE 335434 as defined in ASTM D 3350. The section properties shall be according to the manufacturer pre-submitted geometric properties on file with the Department. The manufacturer shall submit written

certification that the material meets those properties and the resin used to manufacture the pipe meets or exceeds the minimum cell classification requirements."

Add the following to Section 1040 of the Standard Specifications:

"**1040.08 Polypropylene (PP) Pipe.** Storage and handling shall be according to the manufacturer's recommendations, except in no case shall the pipe be exposed to direct sunlight for more than six months. Acceptance testing of the pipe shall be accomplished during the same construction season in which it is installed. The section properties shall be according to the manufacturer pre-submitted geometric properties on file with the Department. The manufacturer shall submit written certification that the material meets those properties. The pipe shall meet the following additional requirements.

(a) Corrugated PP Pipe with a Smooth Interior. The pipe shall be according to AAHSTO M 330 (nominal size – 12 to 60 in. (300 to 1500 mm)). The pipe shall be Type S or D.

(b) Perforated Corrugated PP Pipe with A Smooth Interior. The pipe shall be according to AASHTO M 330 (nominal size – 12 to 60 in. (300 to 1500 mm)). The pipe shall be Type SP. In addition, the top centerline of the pipe shall be marked so that it is readily visible from the top of the trench before backfilling, and the upper ends of the slot perforations shall be a minimum of ten degrees below the horizontal."

80325

PAYMENTS TO SUBCONTRACTORS (BDE)

Effective: June 1, 2000
Revised: January 1, 2006

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require Contractors to pay subcontractors for satisfactory performance of their subcontracts and to set the time for such payments.

State law also addresses the timing of payments to be made to subcontractors and material suppliers. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, requires that when a Contractor receives any payment from the Department, the Contractor shall make corresponding, proportional payments to each subcontractor and material supplier performing work or supplying material within 15 calendar days after receipt of the Department payment. Section 7 of the Act further provides that interest in the amount of two percent per month, in addition to the payment due, shall be paid to any subcontractor or material supplier by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors and material suppliers throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the State Prompt Payment Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

When progress payments are made to the Contractor according to Article 109.07 of the Standard Specifications, the Contractor shall make a corresponding payment to each subcontractor and material supplier in proportion to the work satisfactorily completed by each subcontractor and for the material supplied to perform any work of the contract. The proportionate amount of partial payment due to each subcontractor and material supplier throughout the contracting chain shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the progress payment to the Contractor. Subcontractors and material suppliers shall be paid by the Contractor within 15 calendar days after the receipt of payment from the Department. The Contractor shall not hold retainage from the subcontractors. These obligations shall also apply to any payments made by subcontractors and material suppliers to their subcontractors and material suppliers; and to all payments made to lower tier subcontractors and material suppliers throughout the contracting chain. Any payment or portion of a payment subject to this provision may only be withheld from the subcontractor or material supplier to whom it is due for reasonable cause.

This Special Provision does not create any rights in favor of any subcontractor or material supplier against the State or authorize any cause of action against the State on account of any payment, nonpayment, delayed payment, or interest claimed by application of the State Prompt Payment Act. The Department will not approve any delay or postponement of the 15 day requirement except for reasonable cause shown after notice and hearing pursuant to Section

7(b) of the State Prompt Payment Act. State law creates other and additional remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond according to the Public Construction Bond Act, 30 ILCS 550.

80022

PORTLAND CEMENT CONCRETE (BDE)

Effective: January 1, 2012
Revised: November 1, 2013

Revise Notes 1 and 2 of Article 312.24 of the Standard Specifications to read:

"Note 1. Coarse aggregate shall be gradation CA 6, CA 7, CA 9, CA 10, or CA 11, Class D quality or better. Article 1020.05(d) shall apply.

Note 2. Fine aggregate shall be FA 1 or FA 2. Article 1020.05(d) shall apply."

Revise the first paragraph of Article 312.26 of the Standard Specifications to read:

"**312.26 Proportioning and Mix Design.** At least 60 days prior to start of placing CAM II, the Contractor shall submit samples of materials for proportioning and testing. The mixture shall contain a minimum of 200 lb (90 kg) of cement per cubic yard (cubic meter). Portland cement may be replaced with fly ash according to Article 1020.05(c)(1), however the minimum portland cement content in the mixture shall be 170 lbs/cu yd (101 kg/cu m). Blends of coarse and fine aggregates will be permitted, provided the volume of fine aggregate does not exceed the volume of coarse aggregate. The Engineer will determine the proportions of materials for the mixture. However, the Contractor may substitute their own mix design. Article 1020.05(a) shall apply and a Level III PCC Technician shall develop the mix design."

Revise the second paragraph of Article 503.22 of the Standard Specifications to read:

Other cast-in-place concrete for structures will be paid for at the contract unit price per cubic yard (cubic meter) for CONCRETE HANDRAIL, CONCRETE ENCASEMENT, and SEAL COAT CONCRETE."

Add the following to Article 1003.02 of the Standard Specifications:

(e) Alkali Reaction.

(1) ASTM C 1260. Each fine aggregate will be tested by the Department for alkali reaction according to ASTM C 1260. The test will be performed with Type I or II portland cement having a total equivalent alkali content (Na_2O + $0.658K_2O$) of 0.90 percent or greater. The Engineer will determine the assigned expansion value for each aggregate, and these values will be made available on the Department's Alkali-Silica Potential Reactivity Rating List. The Engineer may differentiate aggregate based on ledge, production method, gradation number, or other factors. An expansion value of 0.03 percent will be assigned to limestone or dolomite fine

aggregates (manufactured stone sand). However, the Department reserves the right to perform the ASTM C 1260 test.

(2) ASTM C 1293 by Department. In some instances, such as chert natural sand or other fine aggregates, testing according to ASTM C 1260 may not provide accurate test results. In this case, the Department may only test according to ASTM C 1293.

(3) ASTM C 1293 by Contractor. If an individual aggregate has an ASTM C 1260 expansion value that is unacceptable to the Contractor, an ASTM C 1293 test may be performed by the Contractor to evaluate the Department's ASTM C 1260 test result. The laboratory performing the ASTM C 1293 test shall be approved by the Department according to the current Bureau of Materials and Physical Research Policy Memorandum "Minimum Laboratory Requirements for Alkali-Silica Reactivity (ASR) Testing".

The ASTM C 1293 test shall be performed with Type I or II portland cement having a total equivalent alkali content (Na_2O + $0.658K_2O$) of 0.80 percent or greater. The interior vertical wall of the ASTM C 1293 recommended container (pail) shall be half covered with a wick of absorbent material consisting of blotting paper. If the testing laboratory desires to use an alternate container, wick of absorbent material, or amount of coverage inside the container with blotting paper, ASTM C 1293 test results with an alkali-reactive aggregate of known expansion characteristics shall be provided to the Engineer for review and approval. If the expansion is less than 0.040 percent after one year, the aggregate will be assigned an ASTM C 1260 expansion value of 0.08 percent that will be valid for two years, unless the Engineer determines the aggregate has changed significantly. If the aggregate is manufactured into multiple gradation numbers, and the other gradation numbers have the same or lower ASTM C 1260 value, the ASTM C 1293 test result may apply to multiple gradation numbers.

The Engineer reserves the right to verify a Contractor's ASTM C 1293 test result. When the Contractor performs the test, a split sample shall be provided to the Engineer. The Engineer may also independently obtain a sample at any time. The aggregate will be considered reactive if the Contractor or Engineer obtains an expansion value of 0.040 percent or greater.

Revise the first paragraph of Article 1004.01(e)(5) of the Standard Specifications to read:

"Crushed concrete, crushed slag, or lightweight aggregate for portland cement concrete shall be stockpiled in a moist condition (saturated surface dry or greater) and the moisture content shall be maintained uniformly throughout the stockpile by periodic sprinkling."

Revise Article 1004.02(d) of the Standard Specifications to read:

"(d) Combining Sizes. Each size shall be stored separately and care shall be taken to prevent them from being mixed until they are ready to be proportioned. Separate compartments shall be provided to proportion each size.

(1) When Class BS concrete is to be pumped, the coarse aggregate gradation shall have a minimum of 45 percent passing the 1/2 in. (12.5 mm) sieve. The Contractor may combine two or more coarse aggregate sizes, consisting of CA 7, CA 11, CA 13, CA 14, and CA 16, provided a CA 7 or CA 11 is included in the blend.

(2) If the coarse aggregate is furnished in separate sizes, they shall be combined in proportions to provide a uniformly graded coarse aggregate grading within the following limits.

Class of Concrete 1/	Combined Sizes	Sieve Size and Percent Passing						
		2 1/2 in.	2 in.	1 3/4 in.	1 1/2 in.	1 in.	1/2 in.	No. 4
PV 2/								
	CA 5 & CA 7	---	---	100	98±2	72±22	22±12	3±3
	CA 5 & CA 11	---	---	100	98±2	72±22	22±12	3±3
SI and SC 2/								
	CA 3 & CA 7	100	95±5	---	---	55±25	20±10	3±3
	CA 3 & CA 11	100	95±5	---	---	55±25	20±10	3±3
	CA 5 & CA 7	---	---	100	98±2	72±22	22±12	3±3
	CA 5 & CA 11	---	---	100	98±2	72±22	22±12	3±3

Class of Concrete 1/	Combined Sizes	Sieve Size (metric) and Percent Passing						
		63 mm	50 mm	45 mm	37.5 mm	25 mm	12.5 mm	4.75 mm
PV 2/								
	CA 5 & CA 7	---	---	100	98±2	72±22	22±12	3±3
	CA 5 & CA 11	---	---	100	98±2	72±22	22±12	3±3
SI and SC 2/								
	CA 3 & CA 7	100	95±5	---	---	55±25	20±10	3±3
	CA 3 & CA 11	100	95±5	---	---	55±25	20±10	3±3
	CA 5 & CA 7	---	---	100	98±2	72±22	22±12	3±3
	CA 5 & CA 11	---	---	100	98±2	72±22	22±12	3±3

1/ See Table 1 of Article 1020.04.

2/ Any of the listed combination of sizes may be used."

Add the following to Article 1004.02 of the Standard Specifications:

(g) Alkali Reaction.

(1) ASTM C 1260. Each coarse aggregate will be tested by the Department for alkali reaction according to ASTM C 1260. The test will be performed with Type I or II portland cement having a total equivalent alkali content (Na_2O + 0.658K_2O) of 0.90 percent or greater. The Engineer will determine the assigned expansion value for each aggregate, and these values will be made available on the Department's Alkali-Silica Potential Reactivity Rating List. The Engineer may differentiate aggregate based on ledge, production method, gradation number, or other factors. An expansion value of 0.05 percent will be assigned to limestone or dolomite coarse aggregates. However, the Department reserves the right to perform the ASTM C 1260 test.

(2) ASTM C 1293 by Department. In some instances testing a coarse aggregate according to ASTM C 1260 may not provide accurate test results. In this case, the Department may only test according to ASTM C 1293.

(3) ASTM C 1293 by Contractor. If an individual aggregate has an ASTM C 1260 expansion value that is unacceptable to the Contractor, an ASTM C 1293 test may be performed by the Contractor according to Article 1003.02(e)(3).

Revise the first paragraph of Article 1019.06 of the Standard Specifications to read:

"**1019.06 Contractor Mix Design.** A Contractor may submit their own mix design and may propose alternate fine aggregate materials, fine aggregate gradations, or material proportions. Article 1020.05(a) shall apply and a Level III PCC Technician shall develop the mix design."

Revise Section 1020 of the Standard Specifications to read:

"SECTION 1020. PORTLAND CEMENT CONCRETE

1020.01 Description. This item shall consist of the materials, mix design, production, testing, curing, low air temperature protection, and temperature control of concrete.

1020.02 Materials. Materials shall be according to the following.

Item	Article/Section
(a) Cement	1001
(b) Water	1002
(c) Fine Aggregate	1003
(d) Coarse Aggregate	1004

(e) Concrete Admixtures 1021
(f) Finely Divided Minerals 1010
(g) Concrete Curing Materials 1022
(h) Straw ..... 1081.06(a)(1)
(i) Calcium Chloride 1013.01

1020.03 Equipment. Equipment shall be according to the following.

Item	Article/Section
(a) Concrete Mixers and Trucks	1103.01
(b) Batching and Weighing Equipment	1103.02
(c) Automatic and Semi-Automatic Batching Equipment	1103.03
(d) Water Supply Equipment	1103.11
(e) Membrane Curing Equipment	1101.09
(f) Mobile Portland Cement Concrete Plants	1103.04

1020.04 Concrete Classes and General Mix Design Criteria. The classes of concrete shown in Table 1 identify the various mixtures by the general uses and mix design criteria. If the class of concrete for a specific item of construction is not specified, Class SI concrete shall be used.

For the minimum cement factor in Table 1, it shall apply to portland cement, portland-pozzolan cement, and portland blast-furnace slag except when a particular cement is specified in the Table.

The Contractor shall not assume that the minimum cement factor indicated in Table 1 will produce a mixture that will meet the specified strength. In addition, the Contractor shall not assume that the maximum finely divided mineral allowed in a mix design according to Article 1020.05(c) will produce a mixture that will meet the specified strength. The Contractor shall select a cement factor within the allowable range that will obtain the specified strength. The Contractor shall take into consideration materials selected, seasonal temperatures, and other factors which may require the Contractor to submit multiple mix designs.

For a portland-pozzolan cement, portland blast-furnace slag cement, or when replacing portland cement with finely divided minerals per Articles 1020.05(c) and 1020.05(d), the portland cement content in the mixture shall be a minimum of 375 lbs/cu yd (222 kg/cu m). When the total of organic processing additions, inorganic processing additions, and limestone exceed 5.0 percent in the cement, the minimum portland cement content in the mixture shall be 400 lbs/cu yd (237 kg/cu m). When calculating the portland cement portion in the portland-pozzolan or portland blast-furnace slag cement, the AASHTO M 240 tolerance may be ignored.

Special classifications may be made for the purpose of including the concrete for a particular use or location as a separate pay item in the contract. The concrete used in such cases shall conform to this section.

TABLE 1. CLASSES OF CONCRETE AND MIX DESIGN CRITERIA

Class of Conc.	Use	Specification Section Reference	Cement Factor cwt/cu yd (3)		Water / Cement Ratio lb/lb	Slump in. (4)	Mix Design Compressive Strength (Flexural Strength) psi, minimum			Air Content %	Coarse Aggregate Gradations (14)
							Days				
			Min.	Max			3	14	28		
PV	Pavement Base Course Base Course Widening Driveway Pavement Shoulders Shoulder Curb	420 or 421 353 354 423 483 662	5.65 (1) 6.05 (2)	7.05	0.32 - 0.42	2 - 4 (5)	Ty III 3500 (650)	3500 (650)		5.0 - 8.0 (5)	CA 5 & CA 7, CA 5 & CA 11, CA 7, CA 11, or CA 14
PP	Pavement Patching Bridge Deck Patching (10)	442					3200 (600) Article 701.17(e)(3)b.				CA 7, CA 11, CA 13, CA 14, or CA 16
	PP-1		6.50 6.20 (Ty III)	7.50 7.20 (Ty III)	0.32 - 0.44	2 - 4	at 48 hours			4.0 - 7.0	
	PP-2		7.35	8.20	0.32 - 0.38	2 - 6	at 24 hours			4.0 - 6.0	
	PP-3		7.35 (Ty III) (8)	7.35 (Ty III) (8)	0.32 - 0.35	2 - 4	at 16 hours			4.0 - 6.0	
	PP-4		6.00 (9)	6.25 (9)	0.32 - 0.50	2 - 6	at 8 hours			4.0 - 6.0	
	PP-5		6.75 (9)	6.75 (9)	0.32 - 0.40	2 - 8	at 4 hours			4.0 - 6.0	
RR	Railroad Crossing	422	6.50 6.20 (Ty III)	7.50 7.20 (Ty III)	0.32 - 0.44	2 - 4	3500 (650) at 48 hours			4.0 - 7.0	CA 7, CA 11, or CA 14
BS	Bridge Superstructure Bridge Approach Slab	503	6.05	7.05	0.32 - 0.44	2 - 4 (5)		4000 (675)		5.0 - 8.0 (5)	CA 7, CA 11, or CA 14 (7)
PC	Various Precast Concrete Items Wet Cast Dry Cast	1042	5.65 5.65 (TY III)	7.05 7.05 (TY III)	0.32 - 0.44 0.25 - 0.40	1 - 4 0 - 1	See Section 1042			5.0 - 8.0 N/A	CA7, CA11,CA 13, CA 14, CA 16, or CA 7 & CA 16
PS	Precast Prestressed Members	504	5.65 5.65 (TY III)	7.05 7.05 (TY III)	0.32 - 0.44	1 - 4			Plans	5.0 - 8.0	CA 11 (11), CA 13, CA 14 (11), or CA 16
	Precast Prestressed Piles and Extensions	512							5000		
	Precast Prestressed Sight Screen	639							3500		

TABLE 1. CLASSES OF CONCRETE AND MIX DESIGN CRITERIA

Class of Conc.	Use	Specification Section Reference	Cement Factor cwt/cu yd (3)		Water / Cement Ratio lb/lb	Slump in. (4)	Mix Design Compressive Strength (Flexural Strength) psi, minimum Days			Air Content %	Coarse Aggregate Gradations (14)
			Min.	Max			3	14	28		
DS	Drilled Shaft (12) Metal Shell Piles (12) Sign Structures Drilled Shaft (12) Light Tower Foundation (12)	516 512 734 837	6.65	7.05	0.32 - 0.44	6 - 8 (6)		4000 (675)		5.0 - 8.0	CA 13, CA 14, CA 16, or a blend of these gradations.
SC	Seal Coat	503	5.65 (1) 6.05 (2)	7.05	0.32 - 0.44	3 - 5		3500 (650)		Optional 6.0 max.	CA 3 & CA 7, CA 3 & CA 11, CA 5 & CA 7, CA 5 & CA 11, CA 7, or CA 11
SI	Structures (except Superstructure) Sidewalk Slope Wall Encasement Box Culverts End Section and Collar Curb, Gutter, Curb & Gutter, Median, and Paved Ditch Concrete Barrier Sign Structures Spread Footing Concrete Foundation Pole Foundation (12) Traffic Signal Foundation Drilled Shaft (12) Square or Rectangular	503 424 511 512 540 542 606 637 734 836 878	5.65 (1) 6.05 (2)	7.05	0.32 - 0.44	2 - 4 (5)		3500 (650)		5.0 - 8.0 (5)	CA 3 & CA 7, CA 3 & CA 11, CA 5 & CA 7, CA 5 & CA 11, CA 7, CA 11, CA 13, CA 14, or CA 16 (13)

Notes:
(1) Central-mixed.
(2) Truck-mixed or shrink-mixed.
(3) For Class SC concrete and for any other class of concrete that is to be placed underwater, except Class DS concrete, the cement factor shall be increased by ten percent.
(4) The maximum slump may be increased to 7 in. when a high range water-reducing admixture is used for all classes of concrete, except Class PV, SC, and PP. For Class SC, the maximum slump may be increased to 8 in. For Class PP-1, the maximum slump may be increased to 6 in. For Class PS, the 7 in. maximum slump may be increased to 8 1/2 in. if the high range water-reducing admixture is the polycarboxylate type.
(5) The slump range for slipform construction shall be 1/2 to 2 1/2 in. and the air content range shall be 5.5 to 8.0 percent.
(6) If concrete is placed to displace drilling fluid, or against temporary casing, the slump shall be 8 - 10 in. at the point of placement. If a water-reducing admixture is used in lieu of a high range water-reducing admixture according to Article 1020.05(b)(7), the slump shall be 2 - 4 in.
(7) For Class BS concrete used in bridge deck patching, the coarse aggregate gradation shall be CA 13, CA 14, or CA 16, except CA 11 may be used for full-depth patching.
(8) In addition to the Type III portland cement, 100 lb/cu yd of ground granulated blast-furnace slag and 50 lb/cu yd of microsilica (silica fume) shall be used. For an air temperature greater than 85 °F, the Type III portland cement may be replaced with Type I or II portland cement.
(9) The cement shall be a rapid hardening cement from the Department's "Approved List of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs" for PP-4 and calcium aluminate cement for PP-5.
(10) For Class PP concrete used in bridge deck patching, the coarse aggregate gradation shall be CA 13, CA 14, or CA 16, except CA 11 may be used for full-depth patching. In addition, the mix design shall have 72 hours to obtain a 4,000 psi compressive or 675 psi flexural strength for all PP mix designs.
(11) The nominal maximum size permitted is 3/4 in. Nominal maximum size is defined as the largest sieve which retains any of the aggregate sample particles.
(12) The concrete mix shall be designed to remain fluid throughout the anticipated duration of the pour plus one hour. At the Engineer's discretion, the Contractor may be required to conduct a minimum 2 cu yd trial batch to verify the mix design.
(13) CA 3 or CA 5 may be used when the nominal maximum size does not exceed two-thirds the clear distance between parallel reinforcement bars, or between the reinforcement bar and the form. Nominal maximum size is defined in Note 11.
(14) Alternate combinations of gradation sizes may be used with the approval of the Engineer. Refer also to Article 1004.02(d) for additional information on combining sizes.

TABLE 1. CLASSES OF CONCRETE AND MIX DESIGN CRITERIA (metric)

Class of Conc.	Use	Specification Section Reference	Cement Factor kg/cu m (3)		Water / Cement Ratio kg/kg	Slump mm (4)	Mix Design Compressive Strength (Flexural Strength) kPa, minimum			Air Content %	Coarse Aggregate Gradations (14)
							Days				
			Min.	Max			3	14	28		
PV	Pavement Base Course Base Course Widening Driveway Pavement Shoulders Shoulder Curb	420 or 421 353 354 423 483 662	335 (1) 360 (2)	418	0.32 - 0.42	50 - 100 (5)	Ty III 24,000 (4500)	24,000 (4500)		5.0 - 8.0 (5)	CA 5 & CA 7, CA 5 & CA 11, CA 7, CA 11, or CA 14
PP	Pavement Patching Bridge Deck Patching (10)	442					22,100 (4150) Article 701.17(e)(3)b.				CA 7, CA 11, CA 13, CA 14, or CA 16
	PP-1		385 365 (Ty III)	445 425 (Ty III)	0.32 - 0.44	50 - 100	at 48 hours			4.0 - 7.0	
	PP-2		435	485	0.32 - 0.38	50 - 150	at 24 hours			4.0 - 6.0	
	PP-3		435 (Ty III) (8)	435 (Ty III) (8)	0.32 - 0.35	50 - 100	at 16 hours			4.0 - 6.0	
	PP-4		355 (9)	370 (9)	0.32 - 0.50	50 - 150	at 8 hours			4.0 - 6.0	
	PP-5		400 (9)	400 (9)	0.32 – 0.40	50 - 200	at 4 hours			4.0 – 6.0	
RR	Railroad Crossing	422	385 365 (Ty III)	445 425 (Ty III)	0.32 - 0.44	50 - 100	24,000 (4500) at 48 hours			4.0 - 7.0	CA 7, CA 11, or CA 14
BS	Bridge Superstructure Bridge Approach Slab	503	360	418	0.32 - 0.44	50 - 100 (5)		27,500 (4650)		5.0 - 8.0 (5)	CA 7, CA 11, or CA 14 (7)
PC	Various Precast Concrete Items Wet Cast Dry Cast	1042	335 335 (TY III)	418 418 (TY III)	0.32 - 0.44 0.25 - 0.40	25 - 100 0 - 25	See Section 1042			5.0 - 8.0 N/A	CA7, CA11, CA13, CA 14, CA 16, or CA 7 & CA 16
PS	Precast Prestressed Members	504	335 335 (TY III)	418 418 (TY III)	0.32 - 0.44	25 - 100			Plans	5.0 - 8.0	CA 11 (11), CA 13, CA 14 (11), or CA 16
	Precast Prestressed Piles and Extensions	512							34,500		
	Precast Prestressed Sight Screen	639							24,000		

TABLE 1. CLASSES OF CONCRETE AND MIX DESIGN CRITERIA (metric)

Class of Conc.	Use	Specification Section Reference	Cement Factor kg/cu m (3)		Water / Cement Ratio kg/kg	Slump mm (4)	Mix Design Compressive Strength (Flexural Strength) kPa, minimum Days			Air Content %	Coarse Aggregate Gradations (14)
			Min.	Max			3	14	28		
DS	Drilled Shaft (12) Metal Shell Piles (12) Sign Structures Drilled Shaft (12) Light Tower Foundation (12)	516 512 734 837	395	418	0.32 - 0.44	150 -200 (6)		27,500 (4650)		5.0 - 8.0	CA 13, CA 14, CA 16, or a blend of these gradations.
SC	Seal Coat	503	335 (1) 360 (2)	418	0.32 - 0.44	75 - 125		24,000 (4500)		Optional 6.0 max.	CA 3 & CA 7, CA 3 & CA 11, CA 5 & CA 7, CA 5 & CA 11, CA 7, or CA 11
SI	Structures (except Superstructure) Sidewalk Slope Wall Encasement Box Culverts End Section and Collar Curb, Gutter, Curb & Gutter, Median, and Paved Ditch Concrete Barrier Sign Structures Spread Footing Concrete Foundation Pole Foundation (12) Traffic Signal Foundation Drilled Shaft (12) Square or Rectangular	503 424 511 512 540 542 606 637 734 836 878	335 (1) 360 (2)	418	0.32 - 0.44	50 - 100 (5)		24,000 (4500)		5.0 - 8.0 (5)	CA 3 & CA 7, CA 3 & CA 11, CA 5 & CA 7, CA 5 & CA 11, CA 7, CA 11, CA 13, CA 14, or CA 16 (13)

Notes:

(1) Central-mixed.

(2) Truck-mixed or shrink-mixed.

(3) For Class SC concrete and for any other class of concrete that is to be placed underwater, except Class DS concrete, the cement factor shall be increased by ten percent.

(4) The maximum slump may be increased to 175 mm when a high range water-reducing admixture is used for all classes of concrete except Class PV, SC, and PP. For Class SC, the maximum slump may be increased to 200 mm. For Class PP-1, the maximum slump may be increased to 150 mm. For Class PS, the 175 mm maximum slump may be increased to 215 mm if the high range water-reducing admixture is the polycarboxylate type.

(5) The slump range for slipform construction shall be 13 to 64 mm and the air content range shall be 5.5 to 8.0 percent.

(6) If concrete is placed to displace drilling fluid, or against temporary casing, the slump shall be 200 - 250 mm at the point of placement. If a water-reducing admixture is used in lieu of a high range water-reducing admixture according to Article 1020.05(b)(7), the slump shall be 50 – 100 mm.

(7) For Class BS concrete used in bridge deck patching, the coarse aggregate gradation shall be CA 13, CA 14, or CA 16, except CA 11 may be used for full-depth patching.

(8) In addition to the Type III portland cement, 60 kg/cu m of ground granulated blast-furnace slag and 30 kg/cu m of microsilica (silica fume) shall be used. For an air temperature greater than 30 °C, the Type III portland cement may be replaced with Type I or II portland cement.

(9) The cement shall be a rapid hardening cement from the Department's "Approved List of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs" for PP-4 and calcium aluminate cement for PP-5.

(10) For Class PP concrete used in bridge deck patching, the coarse aggregate gradation shall be CA 13, CA 14, or CA 16, except CA 11 may be used for full-depth patching. In addition, the mix design shall have 72 hours to obtain a 27,500 kPa compressive or 4,650 kPa flexural.

(11) The nominal maximum size permitted is 19 mm. Nominal maximum size is defined as the largest sieve which retains any of the aggregate sample particles.

(12) The concrete mix shall be designed to remain fluid throughout the anticipated duration of the pour plus one hour. At the Engineer's discretion, the Contractor may be required to conduct a minimum 1.5 cu m trial batch to verify the mix design.

(13) CA 3 or CA 5 may be used when the nominal maximum size does not exceed two-thirds the clear distance between parallel reinforcement bars, or between the reinforcement bar and the form. Nominal maximum size is defined in Note 11.

(14) Alternate combinations of gradation sizes may be used with the approval of the Engineer. Refer also to Article 1004.02(d) for additional information on combining sizes.

Self-consolidating concrete is a flowable mixture that does not require mechanical vibration for consolidation. Self-consolidating concrete mix designs may be developed for Class BS, PC, PS, DS, and SI concrete. Self-consolidating concrete mix designs may also be developed for precast concrete products that are not subjected to Class PC concrete requirements according to Section 1042. The mix design criteria for the concrete mixture shall be according to Article 1020.04 with the following exceptions.

(a) The slump requirements shall not apply.

(b) The concrete mixture should be uniformly graded, and information in the "Portland Cement Concrete Level III Technician Course – Manual of Instructions for Design of Concrete Mixtures" may be used to develop the uniformly graded mix design. The coarse aggregate gradations shall be CA 11, CA 13, CA 14, CA 16, or a blend of these gradations. However, the final gradation when using a single coarse aggregate or combination of coarse aggregates shall have 100 percent pass the 1 in. (25 mm) sieve, and minimum 95 percent pass the 3/4 in. (19 mm) sieve. The fine aggregate proportion shall be a maximum 50 percent by weight (mass) of the total aggregate used.

(c) The slump flow range shall be 22 in. (560 mm) minimum to 28 in. (710 mm) maximum and tested according to Illinois Test Procedure SCC-2.

(d) The visual stability index shall be a maximum of 1 and tested according to Illinois Test Procedure SCC-2.

(e) The J-Ring value shall be a maximum of 2 in. (50 mm) and tested according to Illinois Test Procedure SCC-3. The L-Box blocking ratio shall be a minimum of 80 percent and tested according to Illinois Test Procedure SCC-3. The Contractor has the option to select either test.

(f) The hardened visual stability index shall be a maximum of 1 and tested according to Illinois Test Procedure SCC-6.

(g) If Class PC concrete requirements do not apply to the precast concrete product according to Section 1042, the maximum cement factor shall be 7.05 cwt/cu yd (418 kg/cu m) and the maximum allowable water/cement ratio shall be 0.44.

(h) If the measured slump flow, visual stability index, J-Ring value, or L-Box blocking ratio fall outside the limits specified, a check test will be made. In the event of a second failure, the Engineer may refuse to permit the use of the batch of concrete represented.

The Contractor may use water or self-consolidating admixtures at the jobsite to obtain the specified slump flow, visual stability index, J-ring value, or L-box blocking ratio. The maximum design water/cement ratio shall not be exceeded.

1020.05 Other Concrete Criteria. The concrete shall be according to the following.

(a) Proportioning and Mix Design. For all Classes of concrete, it shall be the Contractor's responsibility to determine mix design material proportions and to proportion each batch of concrete. A Level III PCC Technician shall develop the mix design for all Classes of concrete, except Classes PC and PS. The mix design, submittal information, trial batch, and Engineer verification shall be according to the "Portland Cement Concrete Level III Technician" course material.

The Contractor shall provide the mix designs a minimum of 45 calendar days prior to production. More than one mix design may be submitted for each class of concrete.

The Engineer will verify the mix design submitted by the Contractor. Verification of a mix design shall in no manner be construed as acceptance of any mixture produced. Once a mix design has been verified, the Engineer shall be notified of any proposed changes.

Tests performed at the jobsite will determine if a mix design can meet specifications. If the tests indicate it cannot, the Contractor shall make adjustments to a mix design, or submit a new mix design if necessary, to comply with the specifications.

(b) Admixtures. The Contractor shall be responsible for using admixtures and determining dosages for all Classes of concrete, cement aggregate mixture II, and controlled low-strength material that will produce a mixture with suitable workability, consistency, and plasticity. In addition, admixture dosages shall result in the mixture meeting the specified plastic and hardened properties. The Contractor shall obtain approval from the Engineer to use an accelerator when the concrete temperature is greater than 60 °F (16 °C). However, this accelerator approval by the Engineer will not be required for Class PP, RR, PC, and PS concrete. The accelerator shall be the non-chloride type unless otherwise specified in the contract plans.

The Department will maintain an Approved List of Corrosion Inhibitors. Corrosion inhibitor dosage rates shall be according to Article 1020.05(b)(10). For information on approved controlled low-strength material air-entraining admixtures, refer to Article 1019.02. The Department will also maintain an Approved List of Concrete Admixtures, and an admixture technical representative shall be consulted by the Contractor prior to the pour when determining an admixture dosage from this list or when making minor admixture dosage adjustments at the jobsite. The dosage shall be within the range indicated on the approved list unless the influence by other admixtures, jobsite conditions (such as a very short haul time), or other circumstances warrant a dosage outside the range. The Engineer shall be notified when a dosage is proposed outside the range. To determine an admixture dosage, air temperature, concrete temperature, cement source and quantity, finely divided mineral sources and quantity, influence of other admixtures, haul time, placement conditions, and other factors as appropriate shall be considered. The Engineer may request the Contractor to have a batch of concrete mixed in the lab or field to verify the admixture dosage is correct. An admixture dosage or combination of admixture dosages shall not delay the initial set of concrete by more than one hour. When a retarding admixture is required or appropriate for a bridge deck or bridge deck overlay pour, the initial set time shall be delayed until the deflections due

to the concrete dead load are no longer a concern for inducing cracks in the completed work. However, a retarding admixture shall not be used to further extend the pour time and justify the alteration of a bridge deck pour sequence.

When determining water in admixtures for water/cement ratio, the Contractor shall calculate 70 percent of the admixture dosage as water, except a value of 50 percent shall be used for a latex admixture used in bridge deck latex concrete overlays.

The sequence, method, and equipment for adding the admixtures shall be approved by the Engineer. Admixtures shall be added to the concrete separately. An accelerator shall always be added prior to a high range water-reducing admixture, if both are used.

Admixture use shall be according to the following.

(1) When the atmosphere or concrete temperature is 65 °F (18 °C) or higher, a retarding admixture shall be used in the Class BS concrete and concrete bridge deck overlays. The proportions of the ingredients of the concrete shall be the same as without the retarding admixture, except that the amount of mixing water shall be reduced, as may be necessary, in order to maintain the consistency of the concrete as required. In addition, a high range water-reducing admixture shall be used in bridge deck concrete. At the option of the Contractor, a water-reducing admixture may be used with the high range water-reducing admixture in Class BS concrete.

(2) At the Contractor's option, admixtures in addition to an air-entraining admixture may be used for Class PP-1 or RR concrete. When the air temperature is less than 55 °F (13 °C) and an accelerator is used, the non-chloride accelerator shall be calcium nitrite.

(3) When Class C fly ash or ground granulated blast-furnace slag is used in Class PP-1 or RR concrete, a water-reducing or high range water-reducing admixture shall be used.

(4) For Class PP-2 or PP-3 concrete, a non-chloride accelerator followed by a high range water-reducing admixture shall be used, in addition to the air-entraining admixture. The Contractor has the option to use a water-reducing admixture with the high range water-reducing admixture. For Class PP-3 concrete, the non-chloride accelerator shall be calcium nitrite. For Class PP-2 concrete, the non-chloride accelerator shall be calcium nitrite when the air temperature is less than 55 °F (13 °C).

(5) For Class PP-4 concrete, a high range water-reducing admixture shall be used in addition to the air-entraining admixture. The Contractor has the option to use a water-reducing admixture with the high range water-reducing admixture. An accelerator shall not be used. For stationary or truck-mixed concrete, a retarding admixture shall be used to allow for haul time. The Contractor has the option to use

a mobile portland cement concrete plant, but a retarding admixture shall not be used unless approved by the Engineer.

For PP-5 concrete, a non-chloride accelerator, high range water-reducing admixture, and air-entraining admixture shall be used. The accelerator, high range water-reducing admixture, and air-entraining admixture shall be per the Contractor's recommendation and dosage. The approved list of concrete admixtures shall not apply. A mobile portland cement concrete plant shall be used to produce the patching mixture.

(6) When a calcium chloride accelerator is specified in the contract, the maximum chloride dosage shall be 1.0 quart (1.0 L) of solution per 100 lb (45 kg) of cement. The dosage may be increased to a maximum 2.0 quarts (2.0 L) per 100 lb (45 kg) of cement if approved by the Engineer. When a calcium chloride accelerator for Class PP-2 concrete is specified in the contract, the maximum chloride dosage shall be 1.3 quarts (1.3 L) of solution per 100 lb (45 kg) of cement. The dosage may be increased to a maximum 2.6 quarts (2.6 L) per 100 lb (45 kg) of cement if approved by the Engineer.

(7) For Class DS concrete a retarding admixture and a high range water-reducing admixture shall be used. For dry excavations that are 10 ft (3 m) or less, the high range water-reducing admixture may be replaced with a water-reducing admixture if the concrete is vibrated. The use of admixtures shall take into consideration the slump loss limits specified in Article 516.12 and the fluidity requirement in Article 1020.04 (Note 12).

(8) At the Contractor's option, when a water-reducing admixture or a high range water-reducing admixture is used for Class PV, PP-1, RR, SC, and SI concrete, the cement factor may be reduced a maximum 0.30 hundredweight/cu yd (18 kg/cu m). However, a cement factor reduction will not be allowed for concrete placed underwater.

(9) When Type F or Type G high range water-reducing admixtures are used, the initial slump shall be a minimum of 1 1/2 in. (40 mm) prior to addition of the Type F or Type G admixture, except as approved by the Engineer.

(10) When specified, a corrosion inhibitor shall be added to the concrete mixture utilized in the manufacture of precast, prestressed concrete members and/or other applications. It shall be added, at the same rate, to all grout around post-tensioning steel when specified.

When calcium nitrite is used, it shall be added at the rate of 4 gal/cu yd (20 L/cu m), and shall be added to the mix immediately after all compatible admixtures have been introduced to the batch.

When Rheocrete 222+ is used, it shall be added at the rate of 1.0 gal/cu yd (5.0 L/cu m), and the batching sequence shall be according to the manufacturer's instructions.

(c) Finely Divided Minerals. Use of finely divided minerals shall be according to the following.

(1) Fly Ash. At the Contractor's option, fly ash from approved sources may partially replace portland cement in cement aggregate mixture II, Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC, and SI concrete.

The use of fly ash shall be according to the following.

a. Measurements of fly ash and portland cement shall be rounded up to the nearest 5 lb (2.5 kg).

b. When Class F fly ash is used in cement aggregate mixture II, Class PV, BS, PC, PS, DS, SC, and SI concrete, the amount of portland cement replaced shall not exceed 25 percent by weight (mass).

c. When Class C fly ash is used in cement aggregate mixture II, Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC, and SI concrete, the amount of portland cement replaced shall not exceed 30 percent by weight (mass).

d. Fly ash may be used in concrete mixtures when the air temperature is below 40 °F (4 °C), but the Engineer may request a trial batch of the concrete mixture to show the mix design strength requirement will be met.

(2) Ground Granulated Blast-Furnace (GGBF) Slag. At the Contractor's option, GGBF slag may partially replace portland cement in Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC, and SI concrete. For Class PP-3 concrete, GGBF slag shall be used according to Article 1020.04.

The use of GGBF slag shall be according to the following.

a. Measurements of GGBF slag and portland cement shall be rounded up to the nearest 5 lb (2.5 kg).

b. When GGBF slag is used in Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC and SI concrete, the amount of portland cement replaced shall not exceed 35 percent by weight (mass).

c. GGBF slag may be used in concrete mixtures when the air temperature is below 40 °F (4 °C), but the Engineer may request a trial batch of the concrete mixture to show the mix design strength requirement will be met.

(3) Microsilica. At the Contractor's option, microsilica may be added at a maximum of 5.0 percent by weight (mass) of the cement and finely divided minerals summed together.

Microsilica shall be used in Class PP-3 concrete according to Article 1020.04.

(4) High Reactivity Metakaolin (HRM). At the Contractor's option, HRM may be added at a maximum of 5.0 percent by weight (mass) of the cement and finely divided minerals summed together.

(5) Mixtures with Multiple Finely Divided Minerals. Except as specified for Class PP-3 concrete, the Contractor has the option to use more than one finely divided mineral in Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC, and SI concrete as follows.

a. The mixture shall contain a maximum of two finely divided minerals. The finely divided mineral in portland-pozzolan cement or portland blast-furnace slag cement shall count toward the total number of finely divided minerals allowed. The finely divided minerals shall constitute a maximum of 35.0 percent of the total cement plus finely divided minerals. The fly ash portion shall not exceed 30.0 percent for Class C fly ash or 25.0 percent for Class F fly ash. The Class C and F fly ash combination shall not exceed 30.0 percent. The ground granulated blast-furnace slag portion shall not exceed 35.0 percent. The microsilica or high-reactivity metakaolin portion used together or separately shall not exceed ten percent. The finely divided mineral in the portland-pozzolan cement or portland blast-furnace slag blended cement shall apply to the maximum 35.0 percent.

b. Central Mixed. For Class PV, SC, and SI concrete, the mixture shall contain a minimum of 565 lbs/cu yd (335 kg/cu m) of cement and finely divided minerals summed together. If a water-reducing or high-range water-reducing admixture is used, the Contractor has the option to use a minimum of 535 lbs/cu yd (320 kg/cu m).

c. Truck-Mixed or Shrink-Mixed. For Class PV, SC, and SI concrete, the mixture shall contain a minimum of 605 lbs/cu yd (360 kg/cu m) of cement and finely divided minerals summed together. If a water-reducing or high-range water-reducing admixture is used, the Contractor has the option to use a minimum of 575 lbs/cu yd (345 kg/cu m).

d. Central-Mixed, Truck-Mixed or Shrink-Mixed. For Class PP-1 and RR concrete, the mixture shall contain a minimum of 650 lbs/cu yd (385 kg/cu m) of cement and finely divided minerals summed together. For Class PP-1 and RR concrete using Type III portland cement, the mixture shall contain a minimum of 620 lbs/cu yd (365 kg/cu m).

For Class PP-2 concrete, the mixture shall contain a minimum of 735 lbs/cu yd (435 kg/cu m) of cement and finely divided minerals summed together. For Class BS concrete, the mixture shall contain a minimum of 605 lbs/cu yd (360 kg/cu m). For Class DS concrete, the mixture shall contain a minimum of 665 lbs/cu yd (395 kg/cu m).

If a water-reducing or high range water-reducing admixture is used in Class PP-1 and RR concrete, the Contractor has the option to use a minimum of 620 lbs/cu yd (365 kg/cu m) of cement and finely divided minerals summed together. If a water-reducing or high-range water-reducing admixture is used with Type III portland cement in Class PP-1 and RR concrete, the Contractor has the option to use a minimum of 590 lbs/cu yd (350 kg/cu m).

e. Central-Mixed or Truck-Mixed. For Class PC and PS concrete, the mixture shall contain a minimum of 565 lbs/cu yd (335 kg/cu m) of cement and finely divided minerals summed together.

f. The mixture shall contain a maximum of 705 lbs/cu yd (418 kg/cu m) of cement and finely divided mineral(s) summed together for Class PV, BS, PC, PS, DS, SC, and SI concrete. For Class PP-1 and RR concrete, the mixture shall contain a maximum of 750 lbs/cu yd (445 kg/cu m). For Class PP-1 and RR concrete using Type III portland cement, the mixture shall contain a maximum of 720 lbs/cu yd (425 kg/cu m). For Class PP-2 concrete, the mixture shall contain a maximum of 820 lbs/cu yd (485 kg/cu m).

g. For Class SC concrete and for any other class of concrete that is to be placed underwater, except Class DS concrete, the allowable cement and finely divided minerals summed together shall be increased by ten percent.

h. The combination of cement and finely divided minerals shall comply with Article 1020.05(d).

(d) Alkali-Silica Reaction. For cast-in-place (includes cement aggregate mixture II and latex mixtures), precast, and precast prestressed concrete, one of the mixture options provided in Article 1020.05(d)(2) shall be used to reduce the risk of a deleterious alkali-silica reaction in concrete exposed to humid or wet conditions. The mixture options are not intended or adequate for concrete exposed to potassium acetate, potassium formate, sodium acetate, or sodium formate. The mixture options will not be required for the dry environment (humidity less than 60 percent) found inside buildings for residential or commercial occupancy.

The mixture options shall not apply to concrete revetment mats, insertion lining of pipe culverts, portland cement mortar fairing course, controlled low-strength material, miscellaneous grouts that are not prepackaged, Class PP-3 concrete, Class PP-4 concrete, and Class PP-5 concrete.

(1) Aggregate Groups. Each combination of aggregates used in a mixture will be assigned to an aggregate group. The point at which the coarse aggregate and fine aggregate expansion values intersect in the following table will determine the group.

Aggregate Groups			
Coarse Aggregate or Coarse Aggregate Blend ASTM C 1260 Expansion	Fine Aggregate Or Fine Aggregate Blend ASTM C 1260 Expansion		
	≤0.16%	>0.16% - 0.27%	>0.27%
≤0.16%	Group I	Group II	Group III
>0.16% - 0.27%	Group II	Group II	Group III
>0.27%	Group III	Group III	Group IV

(2) Mixture Options. Based upon the aggregate group, the following mixture options shall be used. However, the Department may prohibit a mixture option if field performance shows a deleterious alkali-silica reaction or Department testing indicates the mixture may experience a deleterious alkali-silica reaction.

Reduction of Risk for Deleterious Alkali-Silica Reaction					
Aggregate Groups	Mixture Options				
	Option 1	Option 2	Option 3	Option 4	Option 5
Group I	Mixture options are not applicable. Use any cement or finely divided mineral.				
Group II	X	X	X	X	X
Group III	X	Combine Option 2 with Option 3	Combine Option 2 with Option 3	X	X
Group IV	X	Combine Option 2 with Option 4	Invalid Option	Combine Option 2 with Option 4	X

"X" denotes valid mixture option for aggregate group.

a. Mixture Option 1. The coarse or fine aggregates shall be blended to place the material in a group that will allow the selected cement or finely divided mineral to be used. Coarse aggregate may only be blended with another coarse aggregate. Fine aggregate may only be blended with another fine aggregate. Blending of

coarse with fine aggregate to place the material in another group will not be permitted.

When a coarse or fine aggregate is blended, the weighted expansion value shall be calculated separately for the coarse and fine aggregate as follows:

Weighted Expansion Value = (a/100 x A) + (b/100 x B) + (c/100 x C) + ...

Where: a, b, c... = percentage of aggregate in the blend;
A, B, C... = expansion value for that aggregate.

b. Mixture Option 2. A finely divided mineral shall be used as described in 1), 2), 3), or 4) that follow. In addition, a blended cement with a finely divided mineral may be added to a separate finely divided mineral to meet the following requirements, provided the finely divided minerals are the same material. However, adding together two different finely divided minerals to obtain the specified minimum percentage of one material will not be permitted for 1), 2), 3), and 4). Refer to Mixture Option 5 to address this situation.

1. Class F Fly Ash. For cement aggregate mixture II, Class PV, BS, PC, PS, MS, DS, SC and SI concrete, the Class F fly ash shall be a minimum 25.0 percent by weight (mass) of the cement and finely divided minerals summed together.

   If the maximum total equivalent available alkali content (Na_2O + 0.658K_2O) exceeds 4.50 percent for the Class F fly ash, it may be used only if it complies with Mixture Option 5.

2. Class C Fly Ash. For cement aggregate mixture II, Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC, and SI concrete, Class C fly ash shall be a minimum of 25.0 percent by weight (mass) of the cement and finely divided minerals summed together.

   If the maximum total equivalent available alkali content (Na_2O + 0.658K_2O) exceeds 4.50 percent or the calcium oxide exceeds 26.50 percent for the Class C fly ash, it may be used only per Mixture Option 5.

3. Ground Granulated Blast-Furnace Slag. For Class PV, PP-1, PP-2, RR, BS, PC, PS, DS, SC, and SI concrete, ground granulated blast-furnace slag shall be a minimum of 25.0 percent by weight (mass) of the cement and finely divided minerals summed together.

   If the maximum total equivalent available alkali content (Na_2O + 0.658K_2O) exceeds 1.00 percent for the ground granulated blast-furnace slag, it may be used only per Mixture Option 5.

4. Microsilica or High Reactivity Metakaolin, Microsilica solids or high reactivity metakaolin shall be a minimum 5.0 percent by weight (mass) of the cement and finely divided minerals summed together.

   If the maximum total equivalent available alkali content (Na_2O + 0.658K_2O) exceeds 1.00 percent for the Microsilica or High Reactivity Metakaolin, it may be used only if it complies with Mixture Option 5.

c. Mixture Option 3. The cement used shall have a maximum total equivalent alkali content (Na_2O + 0.658K_2O) of 0.60 percent. When aggregate in Group II is involved and the Contractor desires to use a finely divided mineral, any finely divided mineral may be used with the cement unless the maximum total equivalent available alkali content (Na_2O + 0.658K_2O) exceeds 4.50 percent for the fly ash; or 1.00 percent for the ground granulated blast-furnace slag, microsilica or high reactivity metakaolin. If the alkali content is exceeded, the finely divided mineral may be used only per Mixture Option 5.

d. Mixture Option 4. The cement used shall have a maximum total equivalent alkali content (Na_2O + 0.658K_2O) of 0.45 percent. When aggregate in Group II or III is involved and the Contractor desires to use a finely divided mineral, any finely divided mineral may be used with the cement unless the maximum total equivalent available alkali content (Na_2O + 0.658K_2O) exceeds 4.50 percent for the fly ash; or 1.00 percent for the ground granulated blast-furnace slag, microsilica, or high reactivity metakaolin. If the alkali content is exceeded, the finely divided mineral may be used only per Mixture Option 5.

e. Mixture Option 5. The proposed cement or finely divided mineral may be used if the ASTM C 1567 expansion value is ≤ 0.16 percent when performed on the aggregate in the concrete mixture with the highest ASTM C 1260 test result. The laboratory performing the ASTM C 1567 test shall be approved by the Department according to the current Bureau of Materials and Physical Research Policy Memorandum "Minimum Laboratory Requirements for Alkali-Silica Reactivity (ASR) Testing". The ASTM C 1567 test will be valid for two years, unless the Engineer determines the materials have changed significantly.

   For latex concrete, the ASTM C 1567 test shall be performed without the latex.

   The 0.20 percent autoclave expansion limit in ASTM C 1567 shall not apply.

   If during the two year time period the Contractor needs to replace the cement, and the replacement cement has an equal or lower total equivalent alkali content (Na_2O + 0.658K_2O), a new ASTM C 1567 test will not be required.

   The Engineer reserved the right to verify a Contractor's ASTM C 1567 test result. When the Contractor performs the test, a split sample may be requested by the Engineer. The Engineer may also independently obtain a sample at any time.

The proposed cement or finely divided mineral will not be allowed for use if the Contractor or Engineer obtains an expansion value greater than 0.16 percent.

1020.06 Water/Cement Ratio. The water/cement ratio shall be determined on a weight (mass) basis. When a maximum water/cement ratio is specified, the water shall include mixing water, water in admixtures, free moisture on the aggregates, and water added at the jobsite. The quantity of water may be adjusted within the limit specified to meet slump requirements.

When fly ash, ground granulated blast-furnace slag, high-reactivity metakaolin, or microsilica (silica fume) are used in a concrete mix, the water/cement ratio will be based on the total cement and finely divided minerals contained in the mixture.

1020.07 Slump. The slump shall be determined according to Illinois Modified AASHTO T 119.

If the measured slump falls outside the limits specified, a check test will be made. In the event of a second failure, the Engineer may refuse to permit the use of the batch of concrete represented.

If the Contractor is unable to add water to prepare concrete of the specified slump without exceeding the maximum design water/cement ratio, a water-reducing admixture shall be added.

1020.08 Air Content. The air content shall be determined according to Illinois Modified AASHTO T 152 or Illinois Modified AASHTO T 196. The air-entrainment shall be obtained by the use of cement with an approved air-entraining admixture added during the mixing of the concrete or the use of air-entraining cement.

If the air-entraining cement furnished is found to produce concrete having air content outside the limits specified, its use shall be discontinued immediately and the Contractor shall provide other air-entraining cement which will produce air contents within the specified limits.

If the air content obtained is above the specified maximum limit at the jobsite, the Contractor may have the concrete further mixed, within the limits of time and revolutions specified, to reduce the air content. If the air content obtained is below the specified minimum limit, the Contractor may add to the concrete a sufficient quantity of an approved air-entraining admixture at the jobsite to bring the air content within the specified limits.

1020.09 Strength Tests. The specimens shall be molded and cured according to Illinois Modified AASHTO T 23. Specimens shall be field cured with the construction item as specified in Illinois Modified AASHTO T 23. The compressive strength shall be determined according to Illinois Modified AASHTO T 22. The flexural strength shall be determined according to Illinois Modified AASHTO T 177.

Except for Class PC and PS concrete, the Contractor shall transport the strength specimens from the site of the work to the field laboratory or other location as instructed by the Engineer. During transportation in a suitable light truck, the specimens shall be embedded in straw,

burlap, or other acceptable material in a manner meeting with the approval of the Engineer to protect them from damage; care shall be taken to avoid impacts during hauling and handling. For strength specimens, the Contractor shall provide a field curing box for initial curing and a water storage tank for final curing. The field curing box will be required when an air temperature below 60 °F (16 °C) is expected during the initial curing period. The device shall maintain the initial curing temperature range specified in Illinois Modified AASHTO T 23, and may be insulated or power operated as appropriate.

1020.10 Handling, Measuring, and Batching Materials. Aggregates shall be handled in a manner to prevent mixing with soil and other foreign material.

Aggregates shall be handled in a manner which produces a uniform gradation, before placement in the plant bins. Aggregates delivered to the plant in a nonuniform gradation condition shall be stockpiled. The stockpiled aggregate shall be mixed uniformly before placement in the plant bins.

Aggregates shall have a uniform moisture content before placement in the plant bins. This may require aggregates to be stockpiled for 12 hours or more to allow drainage, or water added to the stockpile, or other methods approved by the Engineer. Moisture content requirements for crushed concrete, crushed slag or lightweight aggregate shall be according to Article 1004.01(e)(5).

Aggregates, cement, and finely divided minerals shall be measured by weight (mass). Water and admixtures shall be measured by volume or weight (mass).

The Engineer may permit aggregates, cement, and finely divided minerals to be measured by volume for small isolated structures and for miscellaneous items. Aggregates, cement, and finely divided minerals shall be measured individually. The volume shall be based upon dry, loose materials.

1020.11 Mixing Portland Cement Concrete. The mixing of concrete shall be according to the following.

(a) Ready-Mixed Concrete. Ready-mixed concrete is central-mixed, truck-mixed, or shrink-mixed concrete transported and delivered in a plastic state ready for placement in the work and shall be according to the following.

(1) Central-Mixed Concrete. Central-mixed concrete is concrete which has been completely mixed in a stationary mixer and delivered in a truck agitator, a truck mixer operating at agitating speed, or a nonagitator truck.

The stationary mixer shall operate at the drum speed for which it was designed. The batch shall be charged into the drum so that some of the water shall enter in advance of the cement, finely divided minerals, and aggregates. The flow of the water shall be uniform and all water shall be in the drum by the end of the first 15 seconds of the mixing period. Water shall begin to enter the drum from zero to

two seconds in advance of solid material and shall stop flowing within two seconds of the beginning of mixing time.

Some coarse aggregate shall enter in advance of other solid materials. For the balance of the charging time for solid materials, the aggregates, finely divided minerals, and cement (to assure thorough blending) shall each flow at acceptably uniform rates, as determined by visual observation. Coarse aggregate shall enter two seconds in advance of other solid materials and a uniform rate of flow shall continue to within two seconds of the completion of charging time.

The entire contents of the drum, or of each single compartment of a multiple-drum mixer, shall be discharged before the succeeding batch is introduced.

The volume of concrete mixed per batch shall not exceed the mixer's rated capacity as shown on the standard rating plate on the mixer by more than ten percent.

The minimum mixing time shall be 75 seconds for a stationary mixer having a capacity greater than 2 cu yd (1.5 cu m). For a mixer with a capacity equal to or less than 2 cu yd (1.5 cu m) the mixing time shall be 60 seconds. Transfer time in multiple drum mixers is included in the mixing time. Mixing time shall begin when all materials are in the mixing compartment and shall end when the discharge of any part of the batch is started. The required mixing times will be established by the Engineer for all types of stationary mixers.

When central-mixed concrete is to be transported in a truck agitator or a truck mixer, the stationary-mixed batch shall be transferred to the agitating unit without delay and without loss of any portion of the batch. Agitating shall start immediately thereafter and shall continue without interruption until the batch is discharged from the agitator. The ingredients of the batch shall be completely discharged from the agitator before the succeeding batch is introduced. Drums and auxiliary parts of the equipment shall be kept free from accumulations of materials.

The vehicles used for transporting the mixed concrete shall be of such capacity, or the batches shall be so proportioned, that the entire contents of the mixer drum can be discharged into each vehicle load.

(2) Truck-Mixed Concrete. Truck-mixed concrete is completely mixed and delivered in a truck mixer. When the mixer is charged with fine and coarse aggregates simultaneously, not less than 60 nor more than 100 revolutions of the drum or blades at mixing speed shall be required, after all of the ingredients including water are in the drum. When fine and coarse aggregates are charged separately, not less than 70 revolutions will be required. For self-consolidating concrete, a minimum of 100 revolutions is required in all cases. Additional mixing beyond 100 revolutions shall be at agitating speed unless additions of water, admixtures, or other materials are made at the jobsite. The mixing operation shall begin immediately after the cement and water, or the cement and wet aggregates, come in contact. The

ingredients of the batch shall be completely discharged from the drum before the succeeding batch is introduced. The drum and auxiliary parts of the equipment shall be kept free from accumulations of materials. If additional water or an admixture is added at the jobsite, the concrete batch shall be mixed a minimum of 40 additional revolutions after each addition.

(3) Shrink-Mixed Concrete. Shrink-mixed concrete is mixed partially in a stationary mixer and completed in a truck mixer for delivery. The mixing time of the stationary mixer may be reduced to a minimum of 30 seconds to intermingle the ingredients, before transferring to the truck mixer. All ingredients for the batch shall be in the stationary mixer and partially mixed before any of the mixture is discharged into the truck mixer. The partially mixed batch shall be transferred to the truck mixer without delay and without loss of any portion of the batch, and mixing in the truck mixer shall start immediately. The mixing time in the truck mixer shall be not less than 50 nor more than 100 revolutions of the drum or blades at mixing speed. For self-consolidating concrete, a minimum of 100 revolutions is required in the truck mixer. Additional mixing beyond 100 revolutions shall be at agitating speed, unless additions of water, admixtures, or other materials are made at the jobsite. Units designed as agitators shall not be used for shrink mixing. The ingredients of the batch shall be completely discharged from the drum before the succeeding batch is introduced. The drum and auxiliary parts of the equipment shall be kept free from accumulations of materials. If additional water or an admixture is added at the jobsite, the concrete batch shall be mixed a minimum of 40 additional revolutions after each addition.

(4) Mixing Water. Wash water shall be completely discharged from the drum or container before a batch is introduced. All mixing water shall be added at the plant and any adjustment of water at the jobsite by the Contractor shall not exceed the specified maximum water/cement ratio or slump. If strength specimens have been made for a batch of concrete, and subsequently during discharge there is more water added, additional strength specimens shall be made for the batch of concrete. No additional water may be added at the jobsite to central-mixed concrete if the mix design has less than 565 lbs/cu yd (335 kg/cu m) of cement and finely divided minerals summed together.

(5) Mixing and Agitating Speeds. The mixing or agitating speeds used for truck mixers or truck agitators shall be per the manufacturer's rating plate.

(6) Capacities. The volume of plastic concrete in a given batch will be determined according to AASHTO T 121, based on the total weight (mass) of the batch, determined either from the weight (masses) of all materials, including water, entering the batch or directly from the net weight (mass) of the concrete in the batch as delivered.

The volume of mixed concrete in truck mixers or truck agitators shall in no case be greater than the rated capacity determined according to the Truck Mixer, Agitator,

and Front Discharge Concrete Carrier Standards of the Truck Mixer Manufacturer's Bureau, as shown by the rating plate attached to the truck. If the truck mixer does not have a rating plate, the volume of mixed concrete shall not exceed 63 percent of the gross volume of the drum or container, disregarding the blades. For truck agitators, the value is 80 percent.

(7) Time of Haul. Haul time shall begin when the delivery ticket is stamped. The delivery ticket shall be stamped no later than five minutes after the addition of the mixing water to the cement, or after the addition of the cement to the aggregate when the combined aggregates contain free moisture in excess of two percent by weight (mass). If more than one batch is required for charging a truck using a stationary mixer, the time of haul shall start with mixing of the first batch. Haul time shall end when the truck is emptied for incorporation of the concrete into the work.

The time elapsing from when water is added to the mix until it is deposited in place at the site of the work shall not exceed 30 minutes when the concrete is transported in nonagitating trucks.

The maximum haul time for concrete transported in truck mixers or truck agitators shall be according to the following.

Concrete Temperature at Point of Discharge °F (°C)	Haul Time	
	Hours	Minutes
50-64 (10-17.5)	1	30
>64 (>17.5) - without retarder	1	0
>64 (>17.5) - with retarder	1	30

To encourage start-up testing for mix adjustments at the plant, the first two trucks will be allowed an additional 15 minutes haul time whenever such testing is performed.

For a mixture which is not mixed on the jobsite, a delivery ticket shall be required for each load. The following information shall be recorded on each delivery ticket: (1) ticket number; (2) name of producer and plant location; (3) contract number; (4) name of Contractor; (5) stamped date and time batched; (6) truck number; (7) quantity batched; (8) amount of admixture(s) in the batch; (9) amount of water in the batch; and (10) Department mix design number.

For concrete mixed in jobsite stationary mixers, the above delivery ticket may be waived, but a method of verifying the haul time shall be established to the satisfaction of the Engineer.

(8) Production and Delivery. The production of ready-mixed concrete shall be such that the operations of placing and finishing will be continuous insofar as the job operations require. The Contractor shall be responsible for producing concrete that will have the required workability, consistency, and plasticity when delivered to the work. Concrete which is unsuitable for placement as delivered will be rejected. The

Contractor shall minimize the need to adjust the mixture at the jobsite, such as adding water and admixtures prior to discharging.

(9) Use of Multiple Plants in the Same Construction Item. The Contractor may simultaneously use central-mixed, truck-mixed, and shrink-mixed concrete from more than one plant, for the same construction item, on the same day, and in the same pour. However, the following criteria shall be met.

a. Each plant shall use the same cement, finely divided minerals, aggregates, admixtures, and fibers.

b. Each plant shall use the same mix design. However, material proportions may be altered slightly in the field to meet slump and air content criteria. Field water adjustments shall not result in a difference that exceeds 0.02 between plants for water/cement ratio. The required cement factor for central-mixed concrete shall be increased to match truck-mixed or shrink-mixed concrete, if the latter two types of mixed concrete are used in the same pour.

c. The maximum slump difference between deliveries of concrete shall be 3/4 in. (19 mm) when tested at the jobsite. If the difference is exceeded, but test results are within specification limits, the concrete may be used. The Contractor shall take immediate corrective action and shall test subsequent deliveries of concrete until the slump difference is corrected. For each day, the first three truck loads of delivered concrete from each plant shall be tested for slump by the Contractor. Thereafter, when a specified test frequency for slump is to be performed, it shall be conducted for each plant at the same time.

d. The maximum air content difference between deliveries of concrete shall be 1.5 percent when tested at the jobsite. If the difference is exceeded, but test results are within specification limits, the concrete may be used. The Contractor shall take immediate corrective action and shall test subsequent deliveries of concrete until the air content difference is corrected. For each day, the first three truck loads of delivered concrete from each plant shall be tested for air content by the Contractor. Thereafter, when a specified test frequency for air content is to be performed, it shall be conducted for each plant at the same time.

e. Strength tests shall be performed and taken at the jobsite for each plant. When a specified strength test is to be performed, it shall be conducted for each plant at the same time. The difference between plants for strength shall not exceed 900 psi (6200 kPa) compressive and 90 psi (620 kPa) flexural. If the strength difference requirements are exceeded, the Contractor shall take corrective action.

f. The maximum haul time difference between deliveries of concrete shall be 15 minutes. If the difference is exceeded, but haul time is within specification

limits, the concrete may be used. The Contractor shall take immediate corrective action and check subsequent deliveries of concrete.

(b) Class PC Concrete. The concrete shall be central-mixed or truck-mixed. Variations in plastic concrete properties shall be minimized between batches.

(c) Class PV Concrete. The concrete shall be central-mixed, truck-mixed, or shrink-mixed.

The required mixing time for stationary mixers with a capacity greater than 2 cu yd (1.5 cu m) may be less than 75 seconds upon satisfactory completion of a mixer performance test. Mixer performance tests may be requested by the Contractor when the quantity of concrete to be placed exceeds 50,000 sq yd (42,000 sq m). The testing shall be conducted according to the current Bureau of Materials and Physical Research's Policy Memorandum, "Field Test Procedures for Mixer Performance and Concrete Uniformity Tests".

The Contractor will be allowed to test two mixing times within a range of 50 to 75 seconds. If satisfactory results are not obtained from the required tests, the mixing time shall continue to be 75 seconds for the remainder of the contract. If satisfactory results are obtained, the mixing time may be reduced. In no event will mixing time be less than 50 seconds.

The Contractor shall furnish the labor, equipment, and material required to perform the testing according to the current Bureau of Materials and Physical Research's Policy Memorandum, "Field Test Procedures for Mixer Performance and Concrete Uniformity Tests".

A contract which has 12 ft (3.6 m) wide pavement or base course, and a continuous length of 1/2 mile (0.8 km) or more, shall have the following additional requirements.

(1) The plant and truck delivery operation shall be able to provide a minimum of 50 cu yd (38 cu m) of concrete per hour.

(2) The plant shall have automatic or semi-automatic batching equipment.

(d) All Other Classes of Concrete. The concrete shall be central-mixed, truck-mixed, or shrink-mixed concrete.

1020.12 Mobile Portland Cement Concrete Plants. The use of a mobile portland cement concrete plant may be approved under the provisions of Article 1020.10 for volumetric proportioning in small isolated structures, thin overlays, and for miscellaneous and incidental concrete items.

The first 1 cu ft (0.03 cu m) of concrete produced may not contain sufficient mortar and shall not be incorporated in the work. The side plate on the cement feeder shall be removed

periodically (normally the first time the mixer is used each day) to see if cement is building up on the feed drum.

Sufficient mixing capacity of mixers shall be provided to enable continuous placing and finishing insofar as the job operations and the specifications require.

Slump and air tests made immediately after discharge of the mix may be misleading, since the aggregates may absorb a significant amount of water for four or five minutes after mixing.

1020.13 Curing and Protection. The method of curing, curing period, and method of protection for each type of concrete construction is included in the following Index Table.

INDEX TABLE OF CURING AND PROTECTION OF CONCRETE CONSTRUCTION			
TYPE OF CONSTRUCTION	CURING METHODS	CURING PERIOD DAYS	LOW AIR TEMPERATURE PROTECTION METHODS
Cast-in-Place Concrete [11/]			
Pavement Shoulder	1020.13(a)(1)(2)(3)(4)(5) [3/ 5/]	3	1020.13(c)
Base Course Base Course Widening	1020.13(a)(1)(2)(3)(4)(5) [2/]	3	1020.13(c)
Driveway Median Barrier Curb Gutter Curb & Gutter Sidewalk Slope Wall Paved Ditch	1020.13(a)(1)(2)(3)(4)(5) [4/ 5/]	3	1020.13(c) [16/]
Catch Basin Manhole Inlet Valve Vault	1020.13(a)(1)(2)(3)(4)(5) [4/]	3	1020.13(c)
Pavement Patching	1020.13(a)(1)(2)(3)(4)(5) [2/]	3 [12/]	1020.13(c)
Bridge Deck Patching	1020.13(a)(3)(5)	3 or 7 [12/]	1020.13(c)
Railroad Crossing	1020.13(a)(3)(5)	1	1020.13(c)
Piles and Drilled Shafts	1020.13(a)(3)(5)	7	1020.13(d)(1)(2)(3)
Foundations & Footings Seal Coat	1020.13(a)(1)(2)(3)(4)(5) [4/ 6/]	7	1020.13(d)(1)(2)(3)
Substructure	1020.13(a)(1)(2)(3)(4)(5) [1/ 7/]	7	1020.13(d)(1)(2)(3)
Superstructure (except deck)	1020.13(a)(1)(2)(3)(5) [8/]	7	1020.13(d)(1)(2)
Deck Bridge Approach Slab	1020.13(a)(5)	7	1020.13(d)(1)(2) [17/]
Retaining Walls	1020.13(a)(1)(2)(3)(4)(5) [1/ 7/]	7	1020.13(d)(1)(2)
Pump Houses	1020.13(a)(1)(2)(3)(4)(5) [1/]	7	1020.13(d)(1)(2)
Culverts	1020.13(a)(1)(2)(3)(4)(5) [4/ 6/]	7	1020.13(d)(1)(2) [18/]
Other Incidental Concrete	1020.13(a)(1)(2)(3)(5)	3	1020.13(c)
Precast Concrete [11/]			
Bridge Slabs Piles and Pile Caps Other Structural Members	1020.13(a)(3)(5) [9/ 10/]	As [13/] Required	9/
All Other Precast Items	1020.13(a)(3)(4)(5) [2/ 9/ 10/]	As [14/] Required	9/
Precast, Prestressed Concrete [11/]			
All Items	1020(a)(3)(5) [9/ 10/]	Until Strand Tensioning is Released [15/]	9/

Notes-General:

1/ Type I, membrane curing only

2/ Type II, membrane curing only

3/ Type III, membrane curing only

4/ Type I, II and III membrane curing

5/ Membrane Curing will not be permitted between November 1 and April 15.

6/ The use of water to inundate foundations and footings, seal coats or the bottom slab of culverts is permissible when approved by the Engineer, provided the water temperature can be maintained at 45 °F (7 °C) or higher.

7/ Asphalt emulsion for waterproofing may be used in lieu of other curing methods when specified and permitted according to Article 503.18. The top surfaces of abutments and piers shall be cured according to Article 1020.13(a)(3) or (5).

8/ On non-traffic surfaces which receive protective coat according to Article 503.19, a linseed oil emulsion curing compound may be used as a substitute for protective coat and other curing methods. The linseed oil emulsion curing compound will be permitted between April 16 and October 31 of the same year, provided it is applied with a mechanical sprayer according to Article 1101.09(b).

9/ Steam, supplemental heat, or insulated blankets (with or without steam/supplemental heat) are acceptable and shall be according to the Bureau of Materials and Physical Research's Policy Memorandum "Quality Control/Quality Assurance Program for Precast Concrete Products" and the "Manual for Fabrication of Precast, Prestressed Concrete Products".

10/ A moist room according to AASHTO M 201 is acceptable for curing.

11/ If curing is required and interrupted because of form removal for cast-in-place concrete items, precast concrete products, or precast prestressed concrete products, the curing shall be resumed within two hours from the start of the form removal.

12/ Curing maintained only until opening strength is attained for pavement patching, with a maximum curing period of three days. For bridge deck patching the curing period shall be three days if Class PP concrete is used and 7 days if Class BS concrete is used.

13/ The curing period shall end when the concrete has attained the mix design strength. The producer has the option to discontinue curing when the concrete has attained 80 percent of the mix design strength or after seven days. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.

14/ The producer shall determine the curing period or may elect to not cure the product. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.

15/ The producer has the option to continue curing after strand release.

16/ When structural steel or structural concrete is in place above slope wall, Article 1020.13(c) shall not apply. The protection method shall be according to Article 1020.13(d)(1).

17/ When Article 1020.13(d)(2) is used to protect the deck, the housing may enclose only the bottom and sides. The top surface shall be protected according to Article 1020.13(d)(1).

18/ For culverts having a waterway opening of 10 sq ft (1 sq m) or less, the culverts may be protected according to Article 1020.13(d)(3).

(a) Methods of Curing. Except as provided for in the Index Table of Curing and Protection of Concrete Construction, curing shall be accomplished by one of the following described methods. When water is required to wet the surface, it shall be applied as a fine spray so that it will not mar or pond on the surface. Except where otherwise specified, the curing period shall be at least 72 hours.

(1) Waterproof Paper Method. The surface of the concrete shall be covered with waterproof paper as soon as the concrete has hardened sufficiently to prevent marring the surface. The surface of the concrete shall be wetted immediately before the paper is placed. The blankets shall be lapped at least 12 in. (300 mm) end to end, and these laps shall be securely weighted with a windrow of earth, or other approved method, to form a closed joint. The same requirements shall apply to the longitudinal laps where separate strips are used for curing edges, except the lap shall be at least 9 in. (225 mm). The edges of the blanket shall be weighted securely with a continuous windrow of earth or any other means satisfactory to the Engineer to provide an air-tight cover. Any torn places or holes in the paper shall be repaired immediately by patches cemented over the openings, using a bituminous cement having a melting point of not less than 180 °F (82 °C). The blankets may be reused, provided they are air-tight and kept serviceable by proper repairs.

A longitudinal pleat shall be provided in the blanket to permit shrinkage where the width of the blanket is sufficient to cover the entire surface. The pleat will not be required where separate strips are used for the edges. Joints in the blanket shall be sewn or cemented together in such a manner that they will not separate during use.

(2) Polyethylene Sheeting Method. The surface of the concrete shall be covered with white polyethylene sheeting as soon as the concrete has hardened sufficiently to prevent marring the surface. The surface of the concrete shall be wetted immediately before the sheeting is placed. The edges of the sheeting shall be weighted securely with a continuous windrow of earth or any other means satisfactory to the Engineer to provide an air-tight cover. Adjoining sheets shall overlap not less than 12 in. (300 mm) and the laps shall be securely weighted with

earth, or any other means satisfactory to the Engineer, to provide an air tight cover. For surface and base course concrete, the polyethylene sheets shall be not less than 100 ft (30 m) in length nor longer than can be conveniently handled, and shall be of such width that, when in place, they will cover the full width of the surface, including the edges, except that separate strips may be used to cover the edges. Any tears or holes in the sheeting shall be repaired. When sheets are no longer serviceable as a single unit, the Contractor may select from such sheets and reuse those which will serve for further applications, provided two sheets are used as a single unit; however, the double sheet units will be rejected when the Engineer deems that they no longer provide an air tight cover.

(3) Wetted Burlap Method. The surface of the concrete shall be covered with wetted burlap blankets as soon as the concrete has hardened sufficiently to prevent marring the surface. The blankets shall overlap 6 in. (150 mm). At least two layers of wetted burlap shall be placed on the finished surface. The burlap shall be kept saturated by means of a mechanically operated sprinkling system. In place of the sprinkling system, at the Contractor's option, two layers of burlap covered with impermeable covering shall be used. The burlap shall be kept saturated with water. Plastic coated burlap may be substituted for one layer of burlap and impermeable covering.

The blankets shall be placed so that they are in contact with the edges of the concrete, and that portion of the material in contact with the edges shall be kept saturated with water.

(4) Membrane Curing Method. Membrane curing will not be permitted where a protective coat, concrete sealer, or waterproofing is to be applied, or at areas where rubbing or a normal finish is required, or at construction joints other than those necessary in pavement or base course. Concrete at these locations shall be cured by another method specified in Article 1020.13(a).

After all finishing work to the concrete surface has been completed, it shall be sealed with membrane curing compound of the type specified within ten minutes. The seal shall be maintained for the specified curing period. The edges of the concrete shall, likewise, be sealed within ten minutes after the forms are removed. Two separate applications, applied at least one minute apart, each at the rate of not less than 1 gal/250 sq ft (0.16 L/sq m) will be required upon the surfaces and edges of the concrete. These applications shall be made with the mechanical equipment specified. Type III compound shall be agitated immediately before and during the application.

At locations where the coating is discontinuous or where pin holes show or where the coating is damaged due to any cause and on areas adjacent to sawed joints, immediately after sawing is completed, an additional coating of membrane curing compound shall be applied at the above specified rate. The equipment used may be of the same type as that used for coating variable widths of pavement. Before the additional coating is applied adjacent to sawed joints, the cut faces of the joint shall

be protected by inserting a suitable flexible material in the joint, or placing an adhesive width of impermeable material over the joint, or by placing the permanent sealing compound in the joint. Material, other than the permanent sealing compound, used to protect cut faces of the joint, shall remain in place for the duration of the curing period. In lieu of applying the additional coating, the area of the sawed joint may be cured according to any other method permitted.

When rain occurs before an application of membrane curing compound has dried, and the coating is damaged, the Engineer may require another application be made in the same manner and at the same rate as the original coat. The Engineer may order curing by another method specified, if unsatisfactory results are obtained with membrane curing compound.

(5) Wetted Cotton Mat Method. After the surface of concrete has been textured or finished, it shall be covered immediately with dry or damp cotton mats. The cotton mats shall be placed in a manner which will not mar the concrete surface. A texture resulting from the cotton mat material is acceptable. The cotton mats shall then be wetted immediately and thoroughly soaked with a gentle spray of water. For bridge decks, a foot bridge shall be used to place and wet the cotton mats.

The cotton mats shall be maintained in a wetted condition until the concrete has hardened sufficiently to place soaker hoses without marring the concrete surface. The soaker hoses shall be placed on top of the cotton mats at a maximum 4 ft (1.2 m) spacing. The cotton mats shall be kept wet with a continuous supply of water for the remainder of the curing period. Other continuous wetting systems may be used if approved by the Engineer.

After placement of the soaker hoses, the cotton mats shall be covered with white polyethylene sheeting or burlap-polyethylene blankets.

For construction items other than bridge decks, soaker hoses or a continuous wetting system will not be required if the alternative method keeps the cotton mats wet. Periodic wetting of the cotton mats is acceptable.

For areas inaccessible to the cotton mats on bridge decks, curing shall be according to Article 1020.13(a)(3).

(b) Removing and Replacing Curing Covering. When curing methods specified above in Article 1020.13(a), (1), (2), or (3) are used for concrete pavement, the curing covering for each day's paving shall be removed to permit testing of the pavement surface with a profilograph or straightedge, as directed by the Engineer.

Immediately after testing, the surface of the pavement shall be wetted thoroughly and the curing coverings replaced. The top surface and the edges of the concrete shall not be left unprotected for a period of more than 1/2 hour.

(c) Protection of Concrete, Other Than Structures, From Low Air Temperatures. When the official National Weather Service forecast for the construction area predicts a low of 32 °F (0 °C), or lower, or if the actual temperature drops to 32 °F (0 °C), or lower, concrete less than 72 hours old shall be provided at least the following protection.

Minimum Temperature	Protection
25 – 32 °F (-4 – 0 °C)	Two layers of polyethylene sheeting, one layer of polyethylene and one layer of burlap, or two layers of waterproof paper.
Below 25 °F (-4 °C)	6 in. (150 mm) of straw covered with one layer of polyethylene sheeting or waterproof paper.

These protective covers shall remain in place until the concrete is at least 96 hours old. When straw is required on pavement cured with membrane curing compound, the compound shall be covered with a layer of burlap, polyethylene sheeting or waterproof paper before the straw is applied.

After September 15, there shall be available to the work within four hours, sufficient clean, dry straw to cover at least two days production. Additional straw shall be provided as needed to afford the protection required. Regardless of the precautions taken, the Contractor shall be responsible for protection of the concrete placed and any concrete damaged by cold temperatures shall be removed and replaced.

(d) Protection of Concrete Structures From Low Air Temperatures. When the official National Weather Service forecast for the construction area predicts a low below 45 °F (7 °C), or if the actual temperature drops below 45 °F (7 °C), concrete less than 72 hours old shall be provided protection. Concrete shall also be provided protection when placed during the winter period of December 1 through March 15. Concrete shall not be placed until the materials, facilities, and equipment for protection are approved by the Engineer.

When directed by the Engineer, the Contractor may be required to place concrete during the winter period. When winter construction is specified, the Contractor shall proceed with the construction, including excavation, pile driving, concrete, steel erection, and all appurtenant work required for the complete construction of the item, except at times when weather conditions make such operations impracticable.

Regardless of the precautions taken, the Contractor shall be responsible for protection of the concrete placed and any concrete damaged by cold temperatures shall be removed and replaced.

(1) Protection Method I. The concrete shall be completely covered with insulating material such as fiberglass, rock wool, or other approved commercial insulating material having the minimum thermal resistance R, as defined in ASTM C 168, for

the corresponding minimum dimension of the concrete unit being protected as shown in the following table.

Minimum Pour Dimension		Thermal Resistance R
in.	(mm)	
6 or less	(150 or less)	R=16
> 6 to 12	(> 150 to 300)	R=10
> 12 to 18	(> 300 to 450)	R=6
> 18	(> 450)	R=4

The insulating material manufacturer shall clearly mark the insulating material with the thermal resistance R value.

The insulating material shall be completely enclosed on sides and edges with an approved waterproof liner and shall be maintained in a serviceable condition. Any tears in the liner shall be repaired in a manner approved by the Engineer. The Contractor shall provide means for checking the temperature of the surface of the concrete during the protection period.

On formed surfaces, the insulating material shall be attached to the outside of the forms with wood cleats or other suitable means to prevent any circulation of air under the insulation and shall be in place before the concrete is placed. The blanket insulation shall be applied tightly against the forms. The edges and ends shall be attached so as to exclude air and moisture. If the blankets are provided with nailing flanges, the flanges shall be attached to the studs with cleats. Where tie rods or reinforcement bars protrude, the areas adjacent to the rods or bars shall be adequately protected in a manner satisfactory to the Engineer. Where practicable, the insulation shall overlap any previously placed concrete by at least 1 ft (300 mm). Insulation on the underside of floors on steel members shall cover the top flanges of supporting members. On horizontal surfaces, the insulating material shall be placed as soon as the concrete has set, so that the surface will not be marred and shall be covered with canvas or other waterproof covering. The insulating material shall remain in place for a period of seven days after the concrete is placed.

The Contractor may remove the forms, providing the temperature is 35 °F (2 °C) and rising and the Contractor is able to wrap the particular section within two hours from the time of the start of the form removal. The insulation shall remain in place for the remainder of the seven days curing period.

(2) Protection Method II. The concrete shall be enclosed in adequate housing and the air surrounding the concrete kept at a temperature of not less than 50 °F (10 °C) nor more than 80 °F (27 °C) for a period of seven days after the concrete is placed. The Contractor shall provide means for checking the temperature of the surface of the concrete or air temperature within the housing during the protection period. All exposed surfaces within the housing shall be cured according to the Index Table.

The Contractor shall provide adequate fire protection where heating is in progress and such protection shall be accessible at all times. The Contractor shall maintain labor to keep the heating equipment in continuous operation.

At the close of the heating period, the temperature shall be decreased to the approximate temperature of the outside air at a rate not to exceed 15 °F (8 °C) per 12 hour period, after which the housing maybe removed. The surface of the concrete shall be permitted to dry during the cooling period.

(3) Protection Method III. As soon as the surface is sufficiently set to prevent marring, the concrete shall be covered with 12 in. (300 mm) of loose, dry straw followed by a layer of impermeable covering. The edges of the covering shall be sealed to prevent circulation of air and prevent the cover from flapping or blowing. The protection shall remain in place until the concrete is seven days old. If construction operations require removal, the protection removed shall be replaced immediately after completion or suspension of such operations.

1020.14 Temperature Control for Placement. Temperature control for concrete placement shall be according to the following.

(a) Concrete other than Structures. Concrete may be placed when the air temperature is above 35 °F (2 °C) and rising, and concrete placement shall stop when the falling temperature reaches 40 °F (4 °C) or below, unless otherwise approved by the Engineer.

The temperature of concrete immediately before placement shall be a minimum of 50 °F (10 °C) and a maximum of 90 °F (32 °C). If concrete is pumped, the temperature of the concrete at point of placement shall be a minimum of 50 °F (10 °C) and a maximum of 90 °F (32 °C). A maximum concrete temperature shall not apply to Class PP concrete.

(b) Concrete in Structures. Concrete may be placed when the air temperature is above 40 °F (4 °C) and rising, and concrete placement shall stop when the falling temperature reaches 45 °F (7 °C) or below, unless otherwise approved by the Engineer.

The temperature of the concrete immediately before placement shall be a minimum of 50 °F (10 °C) and a maximum of 90 °F (32 °C). If concrete is pumped, the temperature of the concrete at point of placement shall be a minimum of 50 °F (10 °C) and a maximum of 90 °F (32 °C).

When insulated forms are used according to Article 1020.13(d)(1), the maximum temperature of the concrete mixture immediately before placement shall be 80 °F (25 °C).

When concrete is placed in contact with previously placed concrete, the temperature of the freshly mixed concrete may be increased to 80 °F (25 °C) by the Contractor to offset anticipated heat loss.

(c) All Classes of Concrete. Aggregates and water shall be heated or cooled uniformly and as necessary to produce concrete within the specified temperature limits. No frozen aggregates shall be used in the concrete.

(d) Temperature. The concrete temperature shall be determined according to Illinois Modified AASHTO T 309.

1020.15 Heat of Hydration Control for Concrete Structures. The Contractor shall control the heat of hydration for concrete structures when the least dimension for a drilled shaft, foundation, footing, substructure, or superstructure concrete pour exceeds 5.0 ft (1.5 m). The work shall be according to the following.

(a) Temperature Restrictions. The maximum temperature of the concrete after placement shall not exceed 150 °F (66 °C). The maximum temperature differential between the internal concrete core and concrete 2 to 3 in. (50 to 75 mm) from the exposed surface shall not exceed 35 °F (19 °C). The Contractor shall perform temperature monitoring to ensure compliance with the temperature restrictions.

(b) Thermal Control Plan. The Contractor shall provide a thermal control plan a minimum of 28 calendar days prior to concrete placement for review by the Engineer. Acceptance of the thermal control plan by the Engineer shall not preclude the Contractor from specification compliance, and from preventing cracks in the concrete. At a minimum, the thermal control plan shall provide detailed information on the following requested items and shall comply with the specific specifications indicated for each item.

(1) Concrete mix design(s) to be used. Grout mix design if post-cooling with embedded pipe.

The mix design requirements in Articles 1020.04 and 1020.05 shall be revised to include the following additional requirements to control the heat of hydration.

a. The concrete mixture should be uniformly graded and preference for larger size aggregate should be used in the mix design. Article 1004.02(d)(2) shall apply and information in the "Portland Cement Concrete Level III Technician Course – Manual of Instructions for Design of Concrete Mixtures" may be used to develop the uniformly graded mixture.

b. The following shall apply to all concrete except Class DS concrete or when self-consolidating concrete is desired. For central-mixed concrete, the Contractor shall have the option to develop a mixture with a minimum of 520 lbs/cu yd (309 kg/cu m) of cement and finely divided minerals summed together. For truck-mixed or shrink-mixed concrete, the Contractor shall have the option to develop a mixture with a minimum of 550 lbs/cu yd (326 kg/cu m) of cement and finely divided minerals summed together. A water-reducing or high range water-reducing admixture shall be used in the central mixed, truck-mixed or shrink-

mixed concrete mixture. For any mixture to be placed underwater, the minimum cement and finely divided minerals shall be 550 lbs/cu yd (326 kg/cu m) for central-mixed concrete, and 580 lbs/cu yd (344 kg/cu m) for truck-mixed or shrink-mixed concrete.

For Class DS concrete, CA 11 may be used. If CA 11 is used, the Contractor shall have the option to develop a mixture with a minimum cement and finely divided minerals of 605 lbs/cu yd (360 kg/cu m) summed together. If CA 11 is used and either Class DS concrete is placed underwater or a self-consolidating concrete mixture is desired, the Contractor shall have the option to develop a mixture with a minimum cement and finely divided minerals of 635 lbs/cu yd (378 kg/cu m) summed together.

c. The minimum portland cement content in the mixture shall be 375 lbs/cu yd (222 kg/cu m). When the total of organic processing additions, inorganic processing additions, and limestone addition exceed 5.0 percent in the cement, the minimum portland cement content in the mixture shall be 400 lbs/cu yd (237 kg/cu m). For a drilled shaft, foundation, footing, or substructure, the minimum portland cement may be reduced to as low as 330 lbs/cu yd (196 kg/cu m) if the concrete has adequate freeze/thaw durability. The Contractor shall provide freeze/thaw test results according to AASHTO T 161 Procedure A or B, and the relative dynamic modulus of elasticity of the mix design shall be a minimum of 80 percent. Freeze/thaw testing will not be required for concrete that will not be exposed to freezing and thawing conditions as determined by the Engineer.

d. The maximum cement replacement with fly ash shall be 40.0 percent. The maximum cement replacement with ground granulated blast-furnace slag shall be 65.0 percent. When cement replacement with ground granulated blast-furnace slag exceeds 35.0 percent, only Grade 100 shall be used.

e. The mixture may contain a maximum of two finely divided minerals. The finely divided mineral in portland-pozzolan cement or portland blast-furnace slag cement shall count toward the total number of finely divided minerals allowed. The finely divided minerals shall constitute a maximum of 65.0 percent of the total cement plus finely divided minerals. The fly ash portion shall not exceed 40.0 percent. The ground granulated blast-furnace slag portion shall not exceed 65.0 percent. The microsilica or high-reactivity metakaolin portion used together or separately shall not exceed 5.0 percent.

f. The time to obtain the specified strength may be increased to a maximum 56 days, provided the curing period specified in Article 1020.13 is increased to a minimum of 14 days.

The minimum grout strength for filling embedded pipe shall be as specified for the concrete, and testing shall be according to AASHTO T 106.

(2) The selected mathematical method for evaluating heat of hydration thermal effects, which shall include the calculated adiabatic temperature rise, calculated maximum concrete temperature, and calculated maximum temperature differential between the internal concrete core and concrete 2 to 3 in. (50 to 75 mm) from the exposed surface. The time when the maximum concrete temperature and maximum temperature differential will occur is required.

Acceptable mathematical methods include ACI 207.2R "Report on Thermal and Volume Change Effects on Cracking of Mass Concrete" as well as other proprietary methods. The Contractor shall perform heat of hydration testing on the cement and finely divided minerals to be used in the concrete mixture. The test shall be according to ASTM C 186 or other applicable test methods, and the result for heat shall be used in the equation to calculate adiabatic temperature rise. Other required test parameters for the mathematical model may be assumed if appropriate.

The Contractor has the option to propose a higher maximum temperature differential between the internal concrete core and concrete 2 to 3 in. (50 to 75 mm) from the exposed surface, but the proposed value shall not exceed 50 °F (28 °C). In addition, based on strength gain of the concrete, multiple maximum temperature differentials at different times may be proposed. The proposed value shall be justified through a mathematical method.

(3) Proposed maximum concrete temperature or temperature range prior to placement.

Article 1020.14 shall apply except a minimum 40 °F (4 °C) concrete temperature will be permitted.

(4) Pre-cooling, post-cooling, and surface insulation methods that will be used to ensure the concrete will comply with the specified maximum temperature and specified or proposed temperature differential. For reinforcement that extends beyond the limits of the pour, the Contractor shall indicate if the reinforcement is required to be covered with insulation.

Refer to ACI 207.4R "Cooling and Insulating Systems for Mass Concrete" for acceptable methods that will be permitted. If embedded pipe is used for post-cooling, the material shall be polyvinyl chloride or polyethylene. The embedded pipe system shall be properly supported, and the Contractor shall subsequently inspect glued joints to ensure they are able to withstand free falling concrete. The embedded pipe system shall be leak tested after inspection of the glued joints, and prior to the concrete placement. The leak test shall be performed at maximum service pressure or higher for a minimum of 15 minutes. All leaks shall be repaired. The embedded pipe cooling water may be from natural sources such as streams and rivers, but shall be filtered to prevent system stoppages. When the embedded pipe is no longer needed, the surface connections to the pipe shall be removed to a depth of 4 in. (100 mm) below the surface of the concrete. The remaining pipe shall be

completely filled with grout. The 4 in. (100 mm) deep concrete hole shall be filled with nonshrink grout. Form and insulation removal shall be done in a manner to prevent cracking and ensure the maximum temperature differential is maintained. Insulation shall be in good condition as determined by the Engineer and properly attached.

(5) Dimensions of each concrete pour, location of construction joints, placement operations, pour pattern, lift heights, and time delays between lifts.

Refer to ACI 207.1R "Guide to Mass Concrete" for acceptable placement operations that will be permitted.

(6) Type of temperature monitoring system, the number of temperature sensors, and location of sensors.

A minimum of two independent temperature monitoring systems and corresponding sensors shall be used.

The temperature monitoring system shall have a minimum temperature range of 32 °F (0 °C) to 212 °F (100 °C), an accuracy of ± 2 °F (± 1 °C), and be able to automatically record temperatures without external power. Temperature monitoring shall begin once the sensor is encased in concrete, and with a maximum interval of one hour. Temperature monitoring may be discontinued after the maximum concrete temperature has been reached, post-cooling is no longer required, and the maximum temperature differential between the internal concrete core and the ambient air temperature does not exceed 35 °F (19 °C). The Contractor has the option to select a higher maximum temperature differential, but the proposed value shall not exceed 50 °F (28 °C). The proposed value shall be justified through a mathematical method.

At a minimum, a temperature sensor shall be located at the theoretical hottest portion of the concrete, normally the geometric center, and at the exterior face that will provide the maximum temperature differential. At the exterior face, the sensor shall be located 2 to 3 in. (50 to 75 mm) from the surface of the concrete. Sensors shall also be located a minimum of 1 in. (25 mm) away from reinforcement, and equidistant between cooling pipes if either applies. A sensor will also be required to measure ambient air temperature. The entrant/exit cooling water temperature for embedded pipe shall also be monitored.

Temperature monitoring results shall be provided to the Engineer a minimum of once each day and whenever requested by the Engineer. The report may be electronic or hard copy. The report shall indicate the location of each sensor, the temperature recorded, and the time recorded. The report shall be for all sensors and shall include ambient air temperature and entrant/exit cooling water temperatures. The temperature data in the report may be provided in tabular or graphical format, and the report shall indicate any corrective actions during the monitoring period. At the

completion of the monitoring period, the Contractor shall provide the Engineer a final report that includes all temperature data and corrective actions.

(7) Indicate contingency operations to be used if the maximum temperature or temperature differential of the concrete is reached after placement.

(c) Temperature Restriction Violations. If the maximum temperature of the concrete after placement exceeds 150 °F (66 °C), but is equal to or less than 158 °F (70 °C), the concrete will be accepted if no cracking or other unacceptable defects are identified. If cracking or unacceptable defects are identified, Article 105.03 shall apply. If the concrete temperature exceeds 158 °F (70 °C), Article 105.03 shall apply.

If a temperature differential between the internal concrete core and concrete 2 to 3 in. (50 to 75 mm) from the exposed surface exceeds the specified or proposed maximum value allowed, the concrete will be accepted if no cracking or other unacceptable defects are identified. If unacceptable defects are identified, Article 105.03 shall apply.

When the maximum 150 °F (66 °C) concrete temperature or the maximum allowed temperature differential is violated, the Contractor shall implement corrective action prior to the next pour. In addition, the Engineer reserves the right to request a new thermal control plan for acceptance before the Contractor is allowed to pour again.

(d) Inspection and Repair of Cracks. The Engineer will inspect the concrete for cracks after the temperature monitoring is discontinued, and the Contractor shall provide access for the Engineer to do the inspection. A crack may require repair by the Contractor as determined by the Engineer. The Contractor shall be responsible for the repair of all cracks. Protective coat or a concrete sealer shall be applied to a crack less than 0.007 in. (0.18 mm) in width. A crack that is 0.007 in. (0.18 mm) or greater shall be pressure injected with epoxy according to Section 590.

80279

PORTLAND CEMENT CONCRETE EQUIPMENT (BDE)

Effective: November 1, 2013

Add the following to the first paragraph of Article 1103.03(a)(5) of the Standard Specifications to read:

> "As an alternative to a locking key, the start and finish time for mixing may be automatically printed on the batch ticket. The start and finish time shall be reported to the nearest second."

80326

WARM MIX ASPHALT (BDE)

Effective: January 1, 2012
Revised: November 1, 2013

Description. This work shall consist of designing, producing and constructing Warm Mix Asphalt (WMA) in lieu of Hot Mix Asphalt (HMA) at the Contractor's option. Work shall be according to Sections 406, 407, 408, 1030, and 1102 of the Standard Specifications, except as modified herein. In addition, any references to HMA in the Standard Specifications, or the special provisions shall be construed to include WMA.

WMA is an asphalt mixture which can be produced at temperatures lower than allowed for HMA utilizing approved WMA technologies. WMA technologies are defined as the use of additives or processes which allow a reduction in the temperatures at which HMA mixes are produced and placed. WMA is produced by the use of additives, a water foaming process, or combination of both. Additives include minerals, chemicals or organics incorporated into the asphalt binder stream in a dedicated delivery system. The process of foaming injects water into the asphalt binder stream, just prior to incorporation of the asphalt binder with the aggregate.

Approved WMA technologies may also be used in HMA provided all the requirements specified herein, with the exception of temperature, are met. However, asphalt mixtures produced at temperatures in excess of 275 °F (135 °C) will not be considered WMA when determining the grade reduction of the virgin asphalt binder grade.

Materials.

Add the following to Article 1030.02 of the Standard Specifications.

"(h) Warm Mix Asphalt (WMA) Technologies (Note 3)"

Add the following note to Article 1030.02 of the Standard Specifications.

"Note 3. Warm mix additives or foaming processes shall be selected from the current Bureau of Materials and Physical Research Approved List, "Warm-Mix Asphalt Technologies"."

Equipment.

Revise the first paragraph of Article 1102.01 of the Standard Specifications to read:

"**1102.01 Hot-Mix Asphalt Plant.** The hot-mix asphalt (HMA) plant shall be the batch-type, continuous-type, or dryer drum plant. The plants shall be evaluated for prequalification rating and approval to produce HMA according to the current Bureau of Materials and Physical Research Policy Memorandum, "Approval of Hot-Mix Asphalt Plants and Equipment". Once approved, the Contractor shall notify the Bureau of Materials and Physical Research to obtain approval of all plant modifications. The plants shall not be used to produce mixtures concurrently for more than one project or for private work unless permission is granted in writing

by the Engineer. The plant units shall be so designed, coordinated and operated that they will function properly and produce HMA having uniform temperatures and compositions within the tolerances specified. The plant units shall meet the following requirements."

Add the following to Article 1102.01(a) of the Standard Specifications.

"(13) Equipment for Warm Mix Technologies.

a. Foaming. Metering equipment for foamed asphalt shall have an accuracy of ± 2 percent of the actual water metered. The foaming control system shall be electronically interfaced with the asphalt binder meter.

b. Additives. Additives shall be introduced into the plant according to the supplier's recommendations and shall be approved by the Engineer. The system for introducing the WMA additive shall be interlocked with the aggregate feed or weigh system to maintain correct proportions for all rates of production and batch sizes."

Mix Design Verification.

Add the following to Article 1030.04 of the Standard Specifications.

"(e) Warm Mix Technologies.

(1) Foaming. WMA mix design verification will not be required when foaming technology is used alone (without WMA additives). However, the foaming technology shall only be used on HMA designs previously approved by the Department.

(2) Additives. WMA mix designs utilizing additives shall be submitted to the Engineer for mix design verification.

Production.

Revise the second paragraph of Article 1030.06(a) of the Standard Specifications to read:

"At the start of mix production for HMA, WMA, and HMA using WMA technologies, QC/QA mixture start-up will be required for the following situations; at the beginning of production of a new mixture design, at the beginning of each production season, and at every plant utilized to produce mixtures, regardless of the mix."

Quality Control/Quality Assurance Testing.

Revise the table in Article 1030.05(d)(2)a. of the Standard Specifications to read:

Parameter	Frequency of Tests High ESAL Mixture Low ESAL Mixture	Frequency of Tests All Other Mixtures	Test Method See Manual of Test Procedures for Materials
Aggregate Gradation % passing sieves: 1/2 in. (12.5 mm), No. 4 (4.75 mm), No. 8 (2.36 mm), No. 30 (600 μm) No. 200 (75 μm) Note 1.	1 washed ignition oven test on the mix per half day of production Note 4.	1 washed ignition oven test on the mix per day of production Note 4.	Illinois Procedure
Asphalt Binder Content by Ignition Oven Note 2.	1 per half day of production	1 per day	Illinois-Modified AASHTO T 308
VMA Note 3.	Day's production ≥ 1200 tons: 1 per half day of production	N/A	Illinois-Modified AASHTO R 35
	Day's production < 1200 tons: 1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)		
Air Voids Bulk Specific Gravity of Gyratory Sample Note 5.	Day's production ≥ 1200 tons: 1 per half day of production	1 per day	Illinois-Modified AASHTO T 312
	Day's production < 1200 tons: 1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)		
Maximum Specific Gravity of Mixture	Day's production ≥ 1200 tons: 1 per half day of production	1 per day	Illinois-Modified AASHTO T 209
	Day's production < 1200 tons: 1 per half day of production for first 2 days and 1 per		

Parameter	Frequency of Tests High ESAL Mixture Low ESAL Mixture	Frequency of Tests All Other Mixtures	Test Method See Manual of Test Procedures for Materials
	day thereafter (first sample of the day)		

Note 1. The No. 8 (2.36 mm) and No. 30 (600 µm) sieves are not required for All Other Mixtures.

Note 2. The Engineer may waive the ignition oven requirement for asphalt binder content if the aggregates to be used are known to have ignition asphalt binder content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the asphalt binder content.

Note 3. The G_{sb} used in the voids in the mineral aggregate (VMA) calculation shall be the same average G_{sb} value listed in the mix design.

Note 4. The Engineer reserves the right to require additional hot bin gradations for batch

Note 5. The WMA compaction temperature for mixture volumetric testing shall be 270 ± 5 °F (132 ± 3 °C) for quality control testing. The WMA compaction temperature for quality assurance testing will be 270 ± 5 °F (132 ± 3 °C) if the mixture is not allowed to cool to room temperature. If the mixture is allowed to cool to room temperature it shall be reheated to standard HMA compaction temperatures."

Construction Requirements.

Revise the second paragraph of Article 406.06(b)(1) of the Standard Specifications to read:

"The HMA shall be delivered at a temperature of 250 to 350 °F (120 to 175 °C). WMA shall be delivered at a minimum temperature of 215 °F (102 °C)."

Basis of Payment.

This work will be paid at the contract unit price bid for the HMA pay items involved. Anti-strip will not be paid for separately, but shall be considered as included in the cost of the work.

80288

HOT-MIX ASPHALT - DENSITY TESTING OF LONGITUDINAL JOINTS (BDE)

Effective: January 1, 2010
Revised: April 1, 2012

Description. This work shall consist of testing the density of longitudinal joints as part of the quality control/quality assurance (QC/QA) of hot-mix asphalt (HMA). Work shall be according to Section 1030 of the Standard Specifications except as follows.

Quality Control/Quality Assurance (QC/QA). Delete the second and third sentence of the third paragraph of Article 1030.05(d)(3) of the Standard Specifications.

Add the following paragraphs to the end of Article 1030.05(d)(3) of the Standard Specifications:

"Longitudinal joint density testing shall be performed at each random density test location. Longitudinal joint testing shall be located at a distance equal to the lift thickness or a minimum of 4 in. (100 mm), from each pavement edge. (i.e. for a 5 in. (125 mm) lift the near edge of the density gauge or core barrel shall be within 5 in. (125 mm) from the edge of pavement.) Longitudinal joint density testing shall be performed using either a correlated nuclear gauge or cores.

a. Confined Edge. Each confined edge density shall be represented by a one-minute nuclear density reading or a core density and shall be included in the average of density readings or core densities taken across the mat which represents the Individual Test.

b. Unconfined Edge. Each unconfined edge joint density shall be represented by an average of three one-minute density readings or a single core density at the given density test location and shall meet the density requirements specified herein. The three one-minute readings shall be spaced ten feet apart longitudinally along the unconfined pavement edge and centered at the random density test location."

Revise the Density Control Limits table in Article 1030.05(d)(4) of the Standard Specifications to read:

"Mixture Composition	Parameter	Individual Test (includes confined edges)	Unconfined Edge Joint Density Minimum
IL-4.75	Ndesign = 50	93.0 – 97.4%	91.0%
IL-9.5, IL-12.5	Ndesign ≥ 90	92.0 – 96.0%	90.0%
IL-9.5,IL-9.5L, IL-12.5	Ndesign < 90	92.5 – 97.4%	90.0%
IL-19.0, IL-25.0	Ndesign ≥ 90	93.0 – 96.0%	90.0%
IL-19.0, IL-19.0L, IL-25.0	Ndesign < 90	93.0 – 97.4%	90.0%

SMA	Ndesign = 50 & 80	93.5 – 97.4%	91.0%
All Other	Ndesign = 30	93.0 - 97.4%	90.0%"

80246

PAYROLLS AND PAYROLL RECORDS (BDE)

Effective: January 1, 2014

FEDERAL AID CONTRACTS. Revise the following section of Check Sheet #1 of the Recurring Special Provisions to read:

"STATEMENTS AND PAYROLLS

The payroll records shall include the worker's name, the worker's address, the worker's telephone number when available, the worker's social security number, the worker's classification or classifications, the worker's gross and net wages paid in each pay period, the worker's number of hours worked each day, the worker's starting and ending times of work each day. However, any Contractor or subcontractor who remits contributions to a fringe benefit fund that is not jointly maintained and jointly governed by one or more employers and one or more labor organization must additionally submit the worker's hourly wage rate, the worker's hourly overtime wage rate, the worker's hourly fringe benefit rates, the name and address of each fringe benefit fund, the plan sponsor of each fringe benefit, if applicable, and the plan administrator of each fringe benefit, if applicable.

The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work, except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead, the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number). In addition, starting and ending times of work each day may be omitted from the payroll records submitted to the Engineer. The submittals shall be on the Department's form SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form."

STATE CONTRACTS. Revise Section IV of Check Sheet #5 of the Recurring Special Provisions to read:

"IV. COMPLIANCE WITH THE PREVAILING WAGE ACT

1. Prevailing Wages. All wages paid by the Contractor and each subcontractor shall be in compliance with The Prevailing Wage Act (820 ILCS 130), as amended, except where a prevailing wage violates a federal law, order, or ruling, the rate conforming to the federal law, order, or ruling shall govern. The Contractor shall be responsible to notify each subcontractor of the wage rates set forth in this contract and any revisions thereto. If the Department of Labor revises the wage rates, the Contractor will not be allowed additional compensation on account of said revisions.

2. Payroll Records. The Contractor and each subcontractor shall make and keep, for a period of five years from the later of the date of final payment under the contract or completion of the contract, records of the wages paid to his/her workers. The payroll

records shall include the worker's name, the worker's address, the worker's telephone number when available, the worker's social security number, the worker's classification or classifications, the worker's gross and net wages paid in each pay period, the worker's number of hours worked each day, the worker's starting and ending times of work each day. However, any contractor or subcontractor who remits contributions to a fringe benefit fund that is not jointly maintained and jointly governed by one or more employers and one or more labor organization must additionally submit the worker's hourly wage rate, the worker's hourly overtime wage rate, the worker's hourly fringe benefit rates, the name and address of each fringe benefit fund, the plan sponsor of each fringe benefit, if applicable, and the plan administrator of each fringe benefit, if applicable. Upon seven business days' notice, these records shall be available at a location within the State, during reasonable hours, for inspection by the Department or the Department of Labor; and Federal, State, or local law enforcement agencies and prosecutors.

3. Submission of Payroll Records. The Contractor and each subcontractor shall submit payroll records to the Engineer each week from the start to the completion of their respective work, except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number). In addition, starting and ending times of work each day may be omitted from the payroll records submitted to the Engineer. The submittals shall be on the Department's form SBE 48, or an approved facsimile. When there has been no activity during a work week, a payroll record shall still be submitted with the appropriate box ("No Work", "Suspended", or "Complete") checked on the form.

   Each submittal shall be accompanied by a statement signed by the Contractor or subcontractor, or an officer, employee, or officer thereof, which avers that: (i) he or she has examined the records and such records are true and accurate; (ii) the hourly rate paid to each worker is not less than the general prevailing rate of hourly wages required by the Act; and (iii) the Contractor or subcontractor is aware that filing a payroll record that he/she knows to be false is a Class A misdemeanor.

4. Employee Interviews. The Contractor and each subcontractor shall permit his/her employees to be interviewed on the job, during working hours, by compliance investigators of the Department or the Department of Labor."

80331

WEEKLY DBE TRUCKING REPORTS (BDE)

Effective: June 2, 2012

The Contractor shall provide a weekly report of Disadvantaged Business Enterprise (DBE) trucks hired by the Contractor or subcontractors (i.e. not owned by the Contractor or subcontractors) that are used on the jobsite; or used for the delivery and/or removal of equipment/material to and from the jobsite. The jobsite shall also include offsite locations, such as plant sites or storage sites, when those locations are used solely for this contract.

The report shall be submitted on the form provided by the Department within ten business days following the reporting period. The reporting period shall be Monday through Sunday for each week reportable trucking activities occur. The report shall be submitted to the Engineer and a copy shall be provided to the district EEO Officer.

Any costs associated with providing weekly DBE trucking reports shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed.

80302

State of Illinois
Department of Transportation

SUPPLEMENTAL SPECIFICATION FOR SECTION 253. PLANTING WOODY PLANTS

This Supplemental Specification amends the provisions of the Standard Specifications for Road and Bridge Construction, adopted January 1, 2012 and shall be construed to be a part thereof, superceding any conflicting provisions thereof applicable to the work under the contract.

253.01 Description. Revise the second sentence of this Article to read:

"This work shall consist of furnishing, transporting, and planting woody plants such as trees, shrubs, evergreens, vines, and seedlings."

253.02 Materials. Revise Article 253.02(a) to read:

"(a) Trees, Shrubs, Evergreens, Vines, and Seedlings ..... 1081.01"

253.08 Excavation of Plant Holes. Revise the heading of the first paragraph of Article 253.08(a) to read:

"(a) Excavation for Deciduous Trees and Evergreen Trees."

Revise the heading of the first paragraph of Article 253.08(b) to read:

"(b) Excavation for Deciduous Shrubs, Evergreen Shrubs, Vines, and Seedlings."

253.13 Bracing. Revise the first sentence of this Article to read:

"All deciduous and evergreen trees, with the exception of multi-stem or clump form specimens, over 8 ft (2.5 m) in height shall require three 6 ft (2 m) long steel posts so placed that they are equidistant from each other and adjacent to the outside of the ball."

253.14 Period of Establishment. Revise the first sentence of the second paragraph of this Article to read:

"This period of establishment for the plants shall not delay acceptance of the entire project and final payment due if the contractor requires and receives from the subcontractor a third party performance bond naming the Department as obligee in the full amount of the planting quantities subject to this period of establishment, multiplied by their contract unit prices."

253.16 Method of Measurement. Revise the third sentence of the first paragraph of this Article to read:

"Trees, shrubs, evergreens, and vines will be measured as each individual plant."

253.17 Basis of Payment. Revise this Article to read:

"**253.17 Basis of Payment.** This work will be paid for at the contract unit price per each for TREES, SHRUBS, EVERGREENS, or VINES, of the species, root type, and plant size specified; and per unit for SEEDLINGS. Payment will be made according to the following schedule.

(a) Initial Payment. Upon completion of planting, mulch covering, wrapping, and bracing, 90 percent of the pay item(s) will be paid.

(b) Final Payment. Upon inspection and acceptance of the plant material, or upon execution of a third party bond, the remaining ten percent of the pay item(s) will be paid."

UNDERGROUND RACEWAYS

Add the following to Article 810.04 of the Standard Specifications:

The Contractor shall be required to hand dig trenches to install underground conduits that are located within 2 ft. of existing petroleum pipelines. Use of machines to excavate material for conduits within this area will not be allowed. Contractor shall coordinate locations with Engineer.

POLE FOUNDATION

Add the following to Section 836 of the Standard Specifications:

The Contractor shall use the vacuum extraction method to excavate material required to install concrete pole foundations that are within 10 ft. of existing petroleum pipelines, 2 ft. of all other utilities, or as direct by the Engineer. Drilling/auguring the foundations within these limits shall not be allowed.

GRANULAR MATERIALS

Effective: October 25, 2013

Revise the title of Article 1003.04 of the Standard Specifications to read:

" 1003.04 Fine Aggregate for Bedding, Trench Backfill, Embankment, Porous Granular Backfill, Sand Backfill for Underdrains, and French Drains."

Revise Article 1003.04(c) of the Standard Specifications to read:

" (c) Gradation. The fine aggregate gradations for granular embankment, granular backfill, shall be FA 1, FA 2, or FA 6 through FA 21.

The fine aggregate gradation for porous granular embankment, porous granular backfill, french drains, and sand backfill for underdrains shall be FA 1, FA 2, or FA 20, except the percent passing the No. 200 (75 µm) sieve shall be 2±2."

Revise Article 1004.05(c) of the Standard Specifications to read:

"(c) Gradation. The coarse aggregate gradations shall be as follows.

Application	Gradation
Blotter	CA 15
Granular Embankment, Granular Backfill, and Bedding	CA 6, CA 10, CA 12, CA 17, CA 18, and CA 19
Porous Granular Embankment, Porous Granular Backfill, and French Drains	CA 7, CA8, CA 11, CA 15, CA 16, and CA 18

(d) Bedding and trench backfill for pipe culverts and storm sewers shall be FA 6.

(e) Bedding, and trench backfill for pipe culverts and storm sewers for Villages shall be according to the Village's specifications.

CONDUIT ENCASED IN 6 IN. CONCRETE

Description. This work shall consist of encasing electrical conduit in concrete.

Material. Conduits shall be encased in IDOT Class SI concrete, in accordance with Section 1020 of the Standard Specifications. Red Integral Concrete Colorant shall be added to ready mixed concrete, in accordance with manufacturer's recommendations.

Warning tape shall be in accordance with APWA Uniform Color Code, and conduit spacers shall be Underground Devices or approved equal.

Installation. Conduits shall be provided with a minimum of 6 in. concrete cover all around the conduits at locations where proposed electrical conduit cross existing petroleum pipelines. Conduits shall be encased for a distance of 2 ft. on either side of the crossings, or as directed by the Engineer.

Electrical conduits shall have a minimum 2 ft. horizontal and vertical clearance from existing petroleum pipes. Conduits crossing the existing pipelines shall be routed either above or below pipelines as directed by the Engineer.

Warning tape shall be installed 12 in. below finished grade (above underground electric conduits), for a distance of 2 ft. on either side of the pipeline crossing. All trenches shall be inspected and approved by the Engineer prior to backfilling.

Multiple conduit runs encased together shall be supported by interlocking plastic spacers designed for the purpose, spaced a minimum of 2 in., along the length of the run as recommended by the manufacturer. During concrete placement there shall be no voids, and spacers shall be undisturbed.

If required by Engineer, conduits encased in concrete below paved surfaces shall be installed, and have concrete reinforced, in accordance with Section 810 of the Standard Specifications.

All work shall be in conformance with the Contract Drawings, Standard Specifications, NEC, County and local ordinances.

Method of Measurement. This work shall be measured for payment in feet.

Basis of Payment. This work shall be paid for at the contract unit price per foot for CONDUIT ENCASED IN 6 IN. CONCRETE, which shall include all labor, materials, and equipment to complete the work specified herein.

Underground electrical conduits shall be paid for at the contract unit price per foot for UNDERGROUND CONDUIT, of the type and size specified.

COUNTY OF COOK

CHICAGO, ILLINOIS

PROPOSAL

For a County Highway Improvement in the County of Cook, State of Illinois, known as

KEDZIE AVENUE – 139th Street to 135th Street
and
139th STREET – Kedzie Avenue to Utica Avenue
Route W46
Section 13-W4612-07-LS
Federal Project No.:TE-HPP-1375(002)
Federal Job No.:C-91-288-13

LOCATION OF IMPROVEMENT

The proposed improvement is part of the public highway system in the County of Cook, State of Illinois, located by section and route before mentioned, and is indicated on the map showing the County Highway System on file in the office of the County Clerk and also in the office of the Illinois Department of Transportation, Division of Highways, Springfield, Illinois.

DESCRIPTION OF IMPROVEMENT

This project includes construction and installation of parkway enhancements, street lighting, sidewalks, ADA ramps, minor drainage improvements, crosswalk and intersection pavement markings and landscaping along Kedzie Avenue from Station 99+00 to Station 128+00, 139th Street from Station 201+00 to 310+00 and approximately 200 feet west of the centerline of Utica Avenue from Station 310+00 to Station 312+00. No additional right-of-way or easement will be required. The existing 5-lane cross section on Kedzie Avenue and 2-lane cross section on 139th Street will be maintained.

ECONOMIC DISCLOSURE STATEMENT AND EXECUTION DOCUMENTS

INDEX

Section	Description
I	**Instructions for Completion of Economic Disclosure Statement**
II	**Insert IDOT Certificate of Eligibility**
III	**Insert IDOT Affidavit of Availability**
IV	**DBE Forms** DBE Participation Statement DBE Utilization Plan Letter of Intent from DBE to perform as Subcontractor, Supplier and/or Consultant Petition for Reduction/Waiver of MBE/WBE Participation Goals DBE Good Faith Efforts Contacts Log for Soliciting DBE Subcontractor or Supplier Participation
V	**Contractor Current Certifications**
VI	**Required Disclosures** Lobby, Local Business Preference, Child Support Enforcement Ordinance, Real Estate Ownership Affidavit of Child Support Obligations Disclosure of Ownership Interest Statement
VII	**Ethics Disclosure Forms** Introduction Letter of Explanation Gift Disclosure Form Familial Relationship Disclosure Provision Familial Relationship Disclosure Form
VIII	**Labor Standards & Prevailing Wage Requirements** Contractor's Certification Concerning Labor Standards & Prevailing Wage Requirements Form Subcontractor's Certification Concerning Labor Standards & Prevailing Wage Requirements Form

IX	**Title 23 United States Code, Section 313. Buy America**
X	**Execution Pages** Sole Proprietor Signature Page Partnership Signature Page Corporation Signature Page Cook County Signature Page

INSTRUCTIONS FOR COMPLETION OF
ECONOMIC DISCLOSURE STATEMENT AND EXECUTION DOCUMENT

This Economic Disclosure Statement and Execution Document ("EDS") is to be completed and executed by every Bidder on a County contract, every party responding to a Request for Proposals or Request for Qualifications "(Proposer"), and others as required by the Cook County Chief Procurement Officer. If the Undersigned is awarded a contract pursuant to the procurement process for which this EDS was submitted (the "Contract"), this Economic Disclosure Statement and Execution Document shall stand as the Undersigned's execution of the Contract.

Definitions. Capitalized terms used in this EDS and not otherwise defined herein shall have the meanings given to such terms in the Instructions to Bidders, General Conditions, Request for Proposals, and Request for Qualifications, or other documents, as applicable.

"Affiliated Entity" means a person or entity that, directly or indirectly: controls the Bidder, is controlled by the Bidder, or is, with the Bidder, under common control of another person or entity. Indicia of control include, without limitation, interlocking management or ownership; identity of interests among family members; shared facilities and equipment; common use of employees; and organization of a business entity following the ineligibility of a business entity to do business with the County under the standards set forth in the Certifications included in this EDS, using substantially the same management, ownership or principals as the ineligible entity.

"Bidder," "Proposer," "Undersigned," or ***"Applicant,"*** is the person or entity executing this EDS. Upon award and execution of a Contract by the County, the Bidder, Proposer, Undersigned or Applicant, as the case may be, shall become the Contractor or Contracting Party.

"Proposal," for purposes of this EDS, is the Undersigned's complete response to an RFP/RFQ, or if no RFQ/RFP was issued by the County, the "Proposal" is such other bid, quote or offer submitted by the Undersigned, and in any event a "Bid" includes this EDS.

"Code" means the Code of Ordinances, Cook County, Illinois available through the Cook County Clerk's Office website (http://www.cookctyclerk.com/sub/ordinances.asp). This page can also be accessed by going to www.cookctyclerk.com, clicking on the tab labeled "County Board Proceedings," and then clicking on the link to "Cook County Ordinances."

"Contractor" or ***"Contracting Party"*** means the Bidder, Proposer or Applicant with whom the County has entered into a Contract.

"EDS" means this complete Economic Disclosure Statement and Execution Document, including all sections listed in the Index and any attachments.

"Lobby" or "lobbying" means to, for compensation, attempt to influence a County official or county employee with respect to any County matter.

"Lobbyist" means any person or entity who lobbies.

"Prohibited Acts" means any of the actions or occurrences which form the basis for disqualification under the Code, or under the Certifications hereinafter set forth.

Sections 1 through 3: DBE Documentation.- (1 original set of documents) Sections 1 and 2 must be completed in order to satisfy the requirements of the County's DBE Ordinance, as set forth in the Contract Documents, if applicable. If the

Undersigned believes a waiver is appropriate and necessary, Section 3, the Petition for Waiver of DBE Participation must be completed.

Section 4: Certifications. - (1 original set of documents. If originals cannot be provided, a copy is acceptable.) Section 4 sets forth certifications that are required for contracting parties under the Code. Execution of this EDS constitutes a warranty that all the statements and certifications contained, and all the facts stated, in the Certifications are true, correct and complete as of the date of execution.

Section 5: Economic and Other Disclosures Statement. - (1 original set of documents.) Section 5 is the County's required Economic and Other Disclosures Statement form. Execution of this EDS constitutes a warranty that all the information provided in the EDS is true, correct and complete as of the date of execution, and binds the Undersigned to the warranties, representations, agreements and acknowledgements contained therein.

NOTE: Cook County only accepts current Certifications.

Sections 6: Execution Forms. Refer to section "Definition of Terms/Information for Bidders" for instructions of number of originals and number of copies needed when submitting a bid document.

Required Updates. The information provided in this EDS will be kept current. In the event of any change in any information provided, including but not limited to any change which would render inaccurate or incomplete any certification or statement made in this EDS, the Undersigned will supplement this EDS up to the time the County takes action, by filing an amended EDS or such other documentation as is requested.

Additional Information. The County's Governmental Ethics and Campaign Financing Ordinances, impose certain duties and obligations on persons or entities seeking County contracts, work, business, or transactions. For further information please contact the Director of Ethics at (312) 603-4304 (69 W. Washington St. Suite 3040, Chicago, IL 60602) or visit our web-site at www.cookcountygov.com and go to the Ethics Department link. The Bidder must comply fully with the applicable ordinances.

Insert

IDOT Certificate of Eligibility

Illinois Department of Transportation

Certificate of Eligibility

Contractor No 3356

Landmark Contractors, Inc.
11916 West Main St. Huntley, IL 60142-9703

WHO HAS FILED WITH THE DEPARTMENT AN APPLICATION FOR PREQUALIFICATION STATEMENT OF EXPERIENCE, EQUIPMENT AND FINANCIAL CONDITION IS HEREBY QUALIFIED TO BID AT ANY OF DEPARTMENT OF TRANSPORTATION LETTINGS IN THE CLASSES OF WORK AND WITHIN THE AMOUNT AND OTHER LIMITATIONS OF EACH CLASSIFICATION, AS LISTED BELOW, FOR SUCH PERIOD AS THE UNCOMPLETED WORK FROM ALL SOURCES DOES NOT EXCEED $17,143,000.00

001	EARTHWORK	$1,425,000
005	HMA PAVING	$225,000
012	DRAINAGE	$825,000
017	CONCRETE CONSTRUCTION	$9,475,000
08A	AGGREGATE BASES & SURF. (A)	$975,000
09A	HIGHWAY STRUCTURES	$2,025,000

THIS CERTIFICATE OF ELIGIBILITY IS VALID FROM 5/13/2013 TO 4/30/2014 INCLUSIVE, AND SUPERSEDES ANY CERTIFICATE PREVIOUSLY ISSUED, BUT IS SUBJECT TO REVISION OR REVOCATION, IF AND WHEN CHANGES IN THE FINANCIAL CONDITION OF THE CONTRACTING FIRM OR OTHER FACTS JUSTIFY SUCH REVISIONS OR REVOCATION.
ISSUED AT SPRINGFIELD, ILLINOIS ON 5/13/2013.

Acting Engineer of Construction

IL 494-0645

Insert

IDOT Affidavit of Availability

Illinois Department of Transportation

Bureau of Construction
2300 South Dirksen Parkway/Room 322
Springfield, Illinois 62764

Affidavit of Availability

For the Letting of 3/26/2014
(Letting date)

Instructions: Complete this form by either typing or using black ink. "Authorization to Bid" will not be issued unless both sides of this form are completed in detail. Use additional forms as needed to list all work.

Part I. Work Under Contract

List below all work you have under contract as either a prime contractor or a subcontractor. It is required to include all pending low bids not yet awarded or rejected. In a joint venture, list only that portion of the work which is the responsibility of your company. The uncompleted dollar value is to be based upon the most recent engineer's or owners estimate, and must include work subcontracted to others. If no work is contracted, show **NONE.**

	1	2	3	4	Awards Pending	
Contract Number	N/A	ISTHA1-13-4133	63763	63723		
Contract With	Curran Contracting	Curran Contracting	IDOT	IDOT		
Estimated Completion Date	5-1-14	7-30-14	5-1-14	5-1-14		
Total Contract Price	374,173.00	335,000.00	3,728,649.00	1,400,000.00		**Accumulated Totals**
Uncompleted Dollar Value if Firm is the Prime Contractor			25,500.00	15,500.00		**41,000.00**
Uncompleted Dollar Value if Firm is the Subcontractor	92,000.00	335,000.00				**427,000.00**
				Total Value of All Work		**468,000.00**

Part II. Awards Pending and Uncompleted Work to be done with your own forces.

List below the uncompleted dollar value of work for each contract and awards pending to be completed with your own forces. All work subcontracted to others will be listed on the reverse of this form. In a joint venture, list only that portion of the work to be done by your company. If no work is contracted, show NONE.

						Accumulated Totals
Earthwork			0.00	0.00		**0.00**
Portland Cement Concrete Paving						**0.00**
HMA Plant Mix						**0.00**
HMA Paving						**0.00**
Clean & Seal Cracks/Joints						**0.00**
Aggregate Bases & Surfaces			0.00	0.00		**0.00**
Highway,R.R. and Waterway Structures						**0.00**
Drainage						**0.00**
Electrical						**0.00**
Cover and Seal Coats						**0.00**
Concrete Construction	92,000.00	335,000.00	10,000.00	15,000.00		**452,000.00**
Landscaping						**0.00**
Fencing						**0.00**
Guardrail						**0.00**
Painting						**0.00**
Signing						**0.00**
Cold Milling, Planning & Rotomilling						**0.00**
Demolition						**0.00**
Pavement Markings (Paint)						**0.00**
Other Construction (List)						**0.00**
						0.00
						0.00
Totals	**92,000.00**		**10,000.00**	**15,000.00**	**0.00**	**452,000.00**

Disclosure of this information is **REQUIRED** to accomplish the statutory purpose as outlined in the "Illinois Procurement Code". Failure to comply will result in non-issuance of an "Authorization To Bid." This form has been approved by the State Forms Management Center.

Illinois Department of Transportation
Bureau of Construction
2300 South Dirksen Parkway/Room 322
Springfield, Illinois 62764

Affidavit of Availability

For the Letting of 3/26/2014
(Letting date)

Instructions: Complete this form by either typing or using black ink. "Authorization to Bid" will not be issued unless both sides of this form are completed in detail. Use additional forms as needed to list all work.

Part I. Work Under Contract

List below all work you have under contract as either a prime contractor or a subcontractor. It is required to include all pending low bids not yet awarded or rejected. In a joint venture, list only that portion of the work which is the responsibility of your company. The uncompleted dollar value is to be based upon the most recent engineer's or owners estimate, and must include work subcontracted to others. If no work is contracted, show **NONE**.

	5	6	7	8	Awards Pending	
Contract Number	ISTHA RR-13-5665					
Contract With	IATHA					
Estimated Completion Date	7-30-14					
Total Contract Price	2,140,000.00					**Accumulated Totals**
Uncompleted Dollar Value if Firm is the Prime Contractor	2,140,000.00					2,181,000.00
Uncompleted Dollar Value if Firm is the Subcontractor						427,000.00
				Total Value of All Work		2,608,000.00

Part II. Awards Pending and Uncompleted Work to be done with your own forces.

List below the uncompleted dollar value of work for each contract and awards pending to be completed with your own forces. All work Subcontracted to others will be listed on the reverse of this form. In a joint venture, list only that portion of the work to be done by your company. If no work is contracted, show NONE.

						Accumulated Totals
Earthwork	459,300.00					**459,300.00**
Portland Cement Concrete Paving						**0.00**
HMA Plant Mix						**0.00**
HMA Paving						**0.00**
Clean & Seal Cracks/Joints						**0.00**
Aggregate Bases & Surfaces	205,700.00					**205,700.00**
Highway,R.R. and Waterway Structures						**0.00**
Drainage	33,500.00					**33,500.00**
Electrical						**0.00**
Cover and Seal Coats						**0.00**
Concrete Construction	385,600.00					**837,600.00**
Landscaping						**0.00**
Fencing						**0.00**
Guardrail						**0.00**
Painting						**0.00**
Signing						**0.00**
Cold Milling, Planning & Rotomilling						**0.00**
Demolition						**0.00**
Pavement Markings (Paint)						**0.00**
Other Construction (List)						**0.00**
REVETMENT MAT	223,500.00					**223,500.00**
						0.00
Totals	**1,307,600.00**	**0.00**	**0.00**	**0.00**	**0.00**	**1,759,600.00**

Disclosure of this information is **REQUIRED** to accomplish the statutory purpose as outlined in the "Illinois Procurement Code". Failure to comply will result in non-issuance of an "Authorization To Bid." This form has been approved by the State Forms Management Center.

Part III. Work Subcontracted to Others

For each contract described in Part I, list all the work you have subcontracted to others.

	1	2	3	4	Awards Pending
Subcontractor			Hardin Paving	Johnson Paving	
Type of Work			Asphalt	Asphalt	
Subcontract Price			133,100.00	162,000.00	
Amount Uncompleted			12,500.00	0.00	
Subcontractor			Schmidt	Elmund	
Type of Work			Brick Paving	Elecrrical	
Subcontract Price			207,400.00	257,100.00	
Amount Uncompleted			0.00	0.00	
Subcontractor			Visu-Sewer	Weiss	
Type of Work			Sewer Lining	Landscaping	
Subcontract Price			72,500.00	86,900.00	
Amount Uncompleted			0.00	0.00	
Subcontractor			Hecker	SRS	
Type of Work			Electrical	Srtiping	
Subcontract Price			1,210,000.00	6,600.00	
Amount Uncompleted			0.00	0.00	
Subcontractor			Weiss Landscaping	Work Zone	
Type of Work			Landscaping	Traffic	
Subcontract Price			76,300.00	21,900.00	
Amount Uncompleted			0.00	500.00	
Subcontractor			Stettner	Midwest Brick	
Type of Work			Layout	Brick Paver	
Subcontract Price			9,800.00	88,300.00	
Amount Uncompleted			0.00	0.00	
Subcontractor			Precision	Northern	
Type of Work			Striping	Fence	
Subcontract Price			4,400.00	91,700.00	
Amount Uncompleted			500.00	0.00	
Total Uncompleted	**0.00**	**0.00**	**13,000.00**	**500.00**	**0.00**

I, being duly sworn, do hereby declare this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates

Subscribed and sworn to before me

this _____ day of _____

Continue to Last Page

Type or Print Name: Barry J. Bornhorst, President

Officer or Director — Title

_____

Notary Public

Signed _____

My commission expires: 8/18/2014

Company: Leandt Mark Contractors, Inc.

(Notary Seal)

Address: 11916 W. Main St.

Huntley, IL 60142

Part III. Work Subcontracted to Others

For each contract described in Part I, list all the work you have subcontracted to others.

	5	6	7	8	Awards Pending
Subcontractor	PETER BAKER				
Type of Work	ASPHALT				
Subcontract Price	223,900.00				
Amount Uncompleted	223,900.00				
Subcontractor	TRAFFIC SOLUTIONS				
Type of Work	TRAFFIC CONTROL				
Subcontract Price	112,100.00				
Amount Uncompleted	112,100.00				
Subcontractor	DND ELECTRIC				
Type of Work	ELECTRICAL				
Subcontract Price	283,000.00				
Amount Uncompleted	283,000.00				
Subcontractor	MAINT. COATING				
Type of Work	STRIPING				
Subcontract Price	44,400.00				
Amount Uncompleted	44,400.00				
Subcontractor	CONIN				
Type of Work	LANDSCAPING				
Subcontract Price	68,500.00				
Amount Uncompleted	68,500.00				
Subcontractor	NORTHERN CONTRCT.				
Type of Work	GURARD RAIL				
Subcontract Price	45,800.00				
Amount Uncompleted	45,800.00				
Subcontractor	BULLSEYE				
Type of Work	PIPE JACKING				
Subcontract Price	54,700.00				
Amount Uncompleted	54,700.00				
Total Uncompleted	**832,400.00**	**0.00**	**0.00**	**0.00**	**0.00**

I, being duly sworn, do hereby declare this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates

Subscribed and sworn to before me

this 26 day of March, 2014.

Notary Public

My commission expires: 8/18/2014

(Notary Seal)

OFFICIAL SEAL
B A BORCHART
NOTARY PUBLIC - STATE OF ILLINOIS
MY COMMISSION EXPIRES:08/18/14

Type or Print Name Barry J Borchart, President
Officer or Director Title

Signed

Company Landmark Contractors, Inc.

Address 11916 W. Main St.
Huntley, IL 60142

File Number 5493-823-3

To all to whom these Presents Shall Come, Greeting:

I, Jesse White, Secretary of State of the State of Illinois, do hereby certify that

LANDMARK CONTRACTORS, INC., A DOMESTIC CORPORATION, INCORPORATED UNDER THE LAWS OF THIS STATE ON JANUARY 21, 1988, APPEARS TO HAVE COMPLIED WITH ALL THE PROVISIONS OF THE BUSINESS CORPORATION ACT OF THIS STATE RELATING TO THE PAYMENT OF FRANCHISE TAXES, AND AS OF THIS DATE, IS IN GOOD STANDING AS A DOMESTIC CORPORATION IN THE STATE OF ILLINOIS.

Authentication #: 1320600704

Authenticate at: http://www.cyberdriveillinois.com

In Testimony Whereof, *I hereto set my hand and cause to be affixed the Great Seal of the State of Illinois, this* 25TH *day of* JULY *A.D.* 2013 .

Jesse White

SECRETARY OF STATE

Certificate of Registration

STATE BOARD OF ELECTRONS

Registration No. 15923

Landmark Contractors, Inc.

11916 W Main Street
PO Box 1104
Huntley IL 60142

Information for this business last updated on:

Tuesday, September 29, 2009

Certificate produced on Thursday, July 25, 2013 at 11:04 AM

Registered
STATE BOARD OF ELECTRONS
ILLINOIS
Business

COOK COUNTY DEPARTMENT OF HIGHWAYS

DBE Participation Statement

(1) Policy

It is public policy that disadvantaged businesses as defined in 49 CFR Part 26 and the Special Provision shall have the maximum opportunity to participate in the performance of contracts financed in whole or in part with Federal or State funds. Consequently the requirements of 49 CFR Part 26 apply to this contract.

(2) Obligation

The contractor agrees to ensure that disadvantaged businesses as defined in 49 CFR Part 26 and the Special Provision have the maximum opportunity to participate in the performance of contracts or subcontracts financed in whole or in part with Federal or State funds. The contractor shall take all necessary and reasonable steps in accordance with 49 CFR Part 26 and the Special Provision to ensure that said businesses have the maximum opportunity to compete for and perform under this contract. The contractor shall not discriminate on the basis of race, color, national origin or sex in the award and performance of contracts.

(3) Project and Bid Identification

Complete the following information concerning the project and bid:

Route: W46

Section: 13-W4612-07-LS

Project: Kedzie Ave - 139th St. to 135th St.

County: Cook

Letting Date: 3/26/14

Total Bid: 2,035,543.48

Contract DBE Goal: 33% (Percent) 778,180.00 (Dollar Amount)

(4) Assurance

I, acting in my capacity as an officer of the undersigned bidder (or bidders if a joint venture), hereby assure the Department that on this project my company : (check one)

[X] Meets or exceeds contract award goals and has provided documented participation as follows:

Disadvantaged Business Participation 38.2 percent

Attached are the signed participation statements, forms SBE 2025, required by the Special Provision evidencing availability and use of each business participating in this plan and assuring that each business will perform a commercially useful function in the work of the contract.

[ ] Failed to meet contract award goals and has included good faith effort documentation to meet the goals and that my company has provided participation as follows:

Disadvantaged Business Participation _____ percent

The contract goals should be accordingly modified or waived. Attached is all information required by the Special Provision in support of this request including good faith effort. Also attached are the signed participation statements, forms SBE 2025, required by the Special Provision evidencing availability and use of each business participating in this plan and assuring that each business will perform a commercially useful function in the work of the contract.

Landmark Contractors, Inc
Company

By

Title President

Date 3/26/14

The "at read" Low Bidder is required to comply with the Special Provision.

Submit only one utilization plan for each project. The utilization plan shall be submitted in accordance with the special provision.

Cook County Department of Highways
Contract Documents
69 West Washington Street – Suite 2200
Chicago, IL 60602

This Cook County Highway Department is requesting disclosure of information that is necessary to accomplish the purpose as outlined under State and Federal law. Disclosure of this information is REQUIRED. Failure to provide any information will result in the contract not being awarded. This form has been approved by the State Forms Manager Center.

SBE 2028 (Rev. CCHD 4/11)

COOK COUNTY DEPARTMENT OF HIGHWAYS

DBE Utilization Plan

Subcontractor Registration Number 1677

Letting _____

Item No. _____

Contract No. _____

Participation Statement

(1) Instructions

This form must be completed for each disadvantaged business participating in the Utilization Plan. This form shall be submitted in accordance with the special provision and will be attached to the Utilization Plan form. If additional space is needed complete an additional form for the firm.

(2) Work

Pay Item No.	Description	Quantity	Unit Price	Total
	See attached			
			Total	778,180-

(3) Partial Payment Items

For any of the above items which are partial pay items, specifically describe the work and subcontract dollar amount:

(4) Commitment

The undersigned certify that the information included herein is true and correct, and that the DBE firm listed below has agreed to perform a commercially useful function in the work of the contract item(s) listed above and to execute a contract with the prime contractor. The undersigned further understand that no changes to this statement may be made without prior approval from the Cook County Highway Department and that complete and accurate information regarding actual work performed on this project and the payment therefore must be provided to the Department.

Signature for Prime Contractor	Signature for DBE Firm
Title President	Title Vice President
Date 3/25/14	Date 3/25/14
Contact Person Barry Borchart	Contact Person Krystyna Fujarowicz
Phone 847-669-5474	Phone 847-695-7000
Firm Name Landmark	Firm Name Elmund & Nelson Co
Address 11916 W. Main St.	Address 1510 Sheldon DR
City/State/Zip Huntley, IL 60142	City/State/Zip Elgin IL 60120

E _____

WC _____

The Cook County Highway Department is requesting disclosure of information that is necessary to accomplish the statutory purpose as outlined under the state and federal law. Disclosure of this information is REQUIRED. Failure to provide any information will result in the contract not being awarded. This form has been approved by the State Forms Management Center.

COOK COUNTY LETTER OF INTENT
(Section 2)

FROM DBE TO PERFORM AS SUBCONTRACTOR, SUPPLIER AND/OR CONSULTANT

Contract Title & Number: _____ / _____

From: Elmund and Nelson Co. (DBE Firm)

To: Landmark Contractors (Bidder/Proposer Firm) and the County of Cook

The Undersigned is prepared to provide the following services, supplies and project in connection with the above named contract (the "Contract"): Each service performed and /or item supplied will be detailed under Description of Service/Supply and Project with all services/items totaled under Fee/Cost to equal the full dollar amount of the Letter of Intent. **This form must be completed for each disadvantaged business participating in the Utilization Plan. Attach this form to the Utilization Plan form. If additional space is needed, complete an additional form for the firm.**

Pay Item No.	Description	Quantity	Fee/Cost	
	see attached.		$ 778,180.00	%
			$	%
			$	%
			Total 778,180.00	%

THE UNDERSIGNED PARTIES AGREE that this Letter of Intent will become a binding Subcontract Agreement conditioned upon the Bidder/Proposer's receipt of a signed contract from the County of Cook. The Undersigned Parties do also certify that they did not affix their signatures to this document until all areas under Description of Service/Supply and Fee/Cost were completed.

Upon Penalty of perjury, I Krystyna Fujarowicz (*print name*) the Vice President (*title*) and duly authorized representative of the Elmund and Nelson Co. (DBE *firm*) affirm that the foregoing information is true and correct and the services, supplies, and/or project indicated above will be supplies/performed for the above indicated total dollar amount $_____ which represents the above indicated total percentage _____% for the contract amount $_____.

(Signature of affiant) 3/25/14 (Date)

Subscribed and sworn to before me this 25 day of March, 2014

(Notary's Signature) (Notary Seal)

OFFICIAL SEAL
B A BORCHART
NOTARY PUBLIC - STATE OF ILLINOIS
MY COMMISSION EXPIRES:08/18/14

Upon penalty of perjury, Barry Borchert (*print name*), the President (*title*) and duly authorized representative of Landmark Contractors (*Bidder Proposer firm*), affirm that the foregoing information is true and correct and the services, supplies, and/or project indicated above will be supplied/performed for the above indicated total dollar amount $ 778,180.00, which represents the above indicated total percentage 38.7 % for the contract amount $ 2,006,212.65.

(Signature of affiant) 3/25/14 (Date)

Subscribed and sworn to before me this 25 day of March, 2014.

(Notary's Signature) (Notary Seal)

OFFICIAL SEAL
B A BORCHART
NOTARY PUBLIC - STATE OF ILLINOIS
MY COMMISSION EXPIRES:08/18/14

ELMUND & NELSON CO.

ELECTRICAL CONTRACTING

1510 SHELDON DR. · ELGIN, IL 60120-8133

CERTIFIED D.B.E.

(847) 695-7000 · FAX (847) 695-7002

PROPOSAL

MARCH 25, 2014

LANDMARK

RE: COOK CO. - KEDZIE AVE
LIGHTING
ROBBINS

Dear Sir:

The undersigned proposes to furnish all materials and perform all labor necessary to complete the following:

BASE BID

ITEM #	DESCRIPTION	U OF M	QUANTITY	UNIT PRICE	TOTAL PRICE
3	ROCK EXCAVATION FOR STRUC	CU YD	350	$ 50.00	$ 17,500.00
49	MAINT OF EX TS INSTALL	EACH	2	$ 2,500.00	$ 5,000.00
53	BREAKAWAY DEVICE, T-BASE	EACH	65	$ 280.00	$ 18,200.00
54	ELECTRIC SERVICE INSTALL	EACH	2	$ 2,500.00	$ 5,000.00
55	ELECTRIC UTILITY SERV CONN	L SUM	1	$ 500.00	$ 500.00
56	JBOX, SS, ATTACH TO STRUCT	EACH	4	$ 850.00	$ 3,400.00
57	LIGHT POLE FOUND, 24" DIA	FOOT	529	$ 210.00	$ 111,090.00
58	LIGHT POLE FOUND 24" OFFST	FOOT	122	$ 250.00	$ 30,500.00
59	LIGHT POLE, ALUM, 40', 15'ARM	EACH	65	$ 2,800.00	$ 182,000.00
60	LIGHTING CONTROLLER	EACH	2	$ 12,500.00	$ 25,000.00
61	LUMINAIRE, 250 WATT	EACH	55	$ 650.00	$ 35,750.00
62	LUMINAIRE, 400 WATT	EACH	10	$ 650.00	$ 6,500.00
63	MAINTAIN EXISTING LS	L SUM	1	$ 2,200.00	$ 2,200.00
64	REMOVAL OF DECORATIVE SL	EACH	2	$ 350.00	$ 700.00
65	REMOVAL OF LIGHTING UNIT	EACH	12	$ 320.00	$ 3,840.00
66	REMOVAL OF POLE FOUND	EACH	13	$ 200.00	$ 2,600.00
67	CONDUIT ATTACH TO STRUCT	FOOT	300	$ 20.00	$ 6,000.00
68	REMOVAL OF LIGHT CONTROL	EACH	2	$ 250.00	$ 500.00
69	CONDUIT ENCASED 6" CONCR	FOOT	120	$ 50.00	$ 6,000.00
70	CONDUIT SPLICE	EACH	2	$ 450.00	$ 900.00
71	UG CONDUIT, NONMETAL 1.5"	FOOT	13,000	$ 8.00	$ 104,000.00
72	UG CONDUIT, NONMETAL 1"	FOOT	200	$ 7.50	$ 1,500.00
73	UG CONDUIT 2.5" GALV STEEL	FOOT	1,350	$ 25.00	$ 33,750.00
74	UG CONDUIT 2" GALV STEEL	FOOT	180	$ 20.00	$ 3,600.00
75	UG CONDUIT 3" GALV STEEL	FOOT	200	$ 28.00	$ 5,600.00
76	UG CONDUIT 5" GALV STEEL	FOOT	600	$ 50.00	$ 30,000.00
77	LIGHT POLE FOUND, SPECIAL	EACH	2	$ 3,000.00	$ 6,000.00
78	PAVEMENT EX POTHOLE	EACH	25	$ 150.00	$ 3,750.00
79	REMOVAL OF LT CON FOUND	EACH	2	$ 200.00	$ 400.00
80	HANDHOLE	EACH	4	$ 1,850.00	$ 7,400.00
81	ECIC XLP-USE 1/C NO 1/O	FOOT	650	$ 4.00	$ 2,600.00
82	ECIC XLP-USE 1/C NO 6	FOOT	57,500	$ 1.20	$ 69,000.00
83	ECIC XLP-USE 1/C NO 8	FOOT	42,500	$ 1.00	$ 42,500.00
84	REBUILD EXISTING HANDHOLE	EACH	3	$ 1,200.00	$ 3,600.00
85	REM ELEC SERVICE INSTALL	EACH	2	$ 250.00	$ 500.00
86	REM ELEC CABLE FROM CON	EACH	1,600	$ 0.50	$ 800.00
				TOTAL	**$778,180.00**

THE ABOVE DOES NOT INCLUDE ANY LANDSCAPE OR PAVEMENT RESTORATION, PERMIT FEES, SPOIL REMOVAL, BONDING, CONCRETE TESTING, SOIL TESTING, LAYOUT, RAILROAD INSURANCE, FLAGGERS, OR TRAFFIC CONTROL.

APPROX 150 YARDS OF SPOILS TO BE LEFT ON-SITE

♦ ♦ ♦ Lighting the way thru the 21st century ♦ ♦ ♦

Illinois Department of Transportation

ELMUND & NELSON

is hereby certified as a

Disadvantaged Business Enterprise

This certificate is valid under current firm ownership and operational control only and supercedes any authorization or listing previously issued.

Gary Hannig
Secretary
Illinois Department of Transportation

Carol Lyle
Bureau Chief
Bureau of Small Business Enterprises

Effective the 24th day of November, 2009

Illinois Department of Transportation
Office of Business & Workforce Diversity
2300 South Dirksen Parkway / Springfield, Illinois 62764

March 20, 2014

CERTIFIED-RETURN RECEIPT REQUESTED

Ms. Arlette Nelson
Elmund & Nelson Co.
1510 Sheldon Dr.
Elgin, IL 60120

Dear Ms. Nelson:

The Illinois Department of Transportation (IDOT) has approved the "No Change Affidavit" for Elmund & Nelson Co., and determined that the firm continues to meet DBE eligibility standards to perform work towards DBE goals.

In order to remain certified and in good standing, you must annually submit a No Change Affidavit. IDOT will send an affidavit form 60 days prior to the firm's next anniversary date.

Should the submitted information change, you are required to notify IDOT's Bureau of Small Business Enterprises (bureau) within 30 days of the change.

Note: Pursuant to 49 CFR Part 26.83(i), whenever there are <u>any</u> change in circumstances affecting your firm's eligibility status, your firm <u>must</u> provide written notification to IDOT within 30 days of the occurrence of the change. If you fail to make timely notification, it may result in the loss of your firm's certification.

If you have any questions, please contact the Bureau of Small Business Enterprises at (217) 782-5490.

Sincerely,

Debra A. Clark, Manager
Certification Section
Bureau of Small Business Enterprises

PETITION FOR WAIVER OF DBE PARTICIPATION
(SECTION 3)

A. BIDDER/PROPOSER HEREBY REQUESTS:

☐ **FULL DBE WAIVER**

☐ **FULL DBE WAIVER**

☐ **REDUCTION (PARTIAL DBE PARTICIPATION)**

_____% of Reduction for DBE Participation

_____% of Reduction for DBE Participation

B. REASON FOR FULL/REDUCTION WAIVER REQUEST

Bidder/Proposer shall check each item applicable to its reason for a waiver request. **Additionally, supporting documentation shall be submitted with this request. All supporting documentations shall be submitted with bid/proposal/quotation.**

☐ 1) Lack of sufficient qualified DBE capable of providing the goods or services required by the contract **(please explain)**

☐ 2) The specifications and necessary requirements for performing the Contract make it impossible or economically infeasible to divide the Contract to enable the contractor to utilize DBE in accordance with the applicable participation **(please explain)**

☐ 3) Price quoted by potential DBE are above competitive levels and increase cost of doing business and would make acceptance of such DBE bid economically impracticable, taking into consideration the percentage of total contract price represented by such DBE bid **(please explain)**

☐ 4) There are other relevant factors making it impossible or economically infeasible to utilize and/or DBE firms **(please explain)**

C. GOOD FAITH EFFORTS TO OBTAIN DBE PARTICIPATION

Bidder/Proposer shall check each item applicable to its reason for a waiver request. **Additionally, supporting documentation shall be submitted with this request. All supporting documentation shall be submitted with bid/proposal/quotation.**

☐ 1) Made timely written solicitation to identified DBE for utilization of goods and/or services; and provided DBE with a timely opportunity to review and obtain relevant specifications, terms and conditions of the bid to enable DBE to prepare an informed response to solicitation **(please attach)**

☐ 2) Followed up initial solicitation of DBE to determine if firms are interested in doing business **(please attach)**

☐ 3) Advertised in a timely manner in one or more daily newspapers and/or trade publication for DBE for supply of goods and services **(please attach)**

☐ 4) Use the services and assistance of the Contract Administrator **(please explain)**

☐ 5) Engaged DBE for indirect participation **(please explain)**

D. OTHER RELEVANT INFORMATION

Attach any other documentation relative to Good Faith Efforts in complying with DBE participation.

DBE GOOD FAITH EFFORTS CHECKLIST

This **Checklist must be submitted with the Bid if the Project Specific DBE Goal was not fully achieved. Attach the Log of Contacts and additional sheets as necessary and other documentation to support Good Faith Efforts. If any of the items below were not completed, attach a detailed written explanation why each such item was not completed. If any other efforts were made to obtain DBE participation in addition to the items listed below, attach a detailed written explanation.**

CHECKED BY BIDDER IF COMPLETED

____ Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.

____ Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime Contractor might otherwise prefer to perform these work items with its own forces.

____ Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.

____ a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.

b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a bidder to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidders are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable.

____ Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.

____ Made efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as may be required for performance of the contract (if applicable).

____ Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.

____ Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.

Good Faith Efforts Contacts Log for Soliciting
DBE Subcontractor or Supplier Participation
(Please duplicate as needed)

Use this form to document all contacts and responses (telephone, e-mail, fax, etc.) regarding the solicitation of subconsultants, subcontractors and suppliers. Duplicate as needed. (It is not necessary to show contacts with which the Vendor reached an agreement to participate on this project, as shown on the DBE Utilization Plan.)

Name of DBE Subcontractor/Supplier: _____

Contact Person: _____ Title: _____

Address: _____

E mail: _____ Telephone No: _____

Date of contract: _____ Method of contact: _____

Scope of work solicited: _____

Reason agreement was not reached: _____

Name of DBE Subcontractor/Supplier: _____

Contact Person: _____ Title: _____

Address: _____

E mail: _____ Telephone No: _____

Date of contract: _____ Method of contact: _____

Scope of work solicited: _____

Reason agreement was not reached: _____

Name of DBE Subcontractor/Supplier: _____

Contact Person: _____ Title: _____

Address: _____

E mail: _____ Telephone No: _____

Date of contract: _____ Method of contact: _____

Scope of work solicited: _____

Reason agreement was not reached: _____

CONTRACTOR CURRENT CERTIFICATIONS
(SECTION 4)

The following certifications are made pursuant to state law and the code. The undersigned is cautioned to carefully read these certifications prior to signing the signature page. Signing the signature page shall constitute a warranty by the undersigned that all the statements, certifications and information set forth within these certifications are true, complete and correct as of the date the signature page is signed. The undersigned is notified that if the county learns that any of the following certifications were falsely made, that any contract entered into with the undersigned shall be subject to termination.

A. PERSONS AND ENTITIES SUBJECT TO DISQUALIFICATION

No person or business entity shall be awarded a contract or sub-contract, for a period of five (5) years from the date of conviction or entry of a plea or admission of guilt, civil or criminal, if that person or business entity:

1) Has been convicted of an act committed, within the State of Illinois, of bribery or attempting to bribe an officer or employee of a unit of state, federal or local government or school district in the State of Illinois in that officer's or employee's official capacity;

2) Has been convicted by federal, state or local government of an act of bid-rigging or attempting to rig bids as defined in the Sherman Anti-Trust Act and Clayton Act. Act. 15 U.S.C. Section 1 *et seq.;*

3) Has been convicted of bid-rigging or attempting to rig bids under the laws of federal, state or local government;

4) Has been convicted of an act committed, within the State, of price-fixing or attempting to fix prices as defined by the Sherman Anti-Trust Act and the Clayton Act. 15 U.S.C. Section 1, *et seq.;*

5) Has been convicted of price-fixing or attempting to fix prices under the laws the State;

6) Has been convicted of defrauding or attempting to defraud any unit of state or local government or school district within the State of Illinois;

7) Has made an admission of guilt of such conduct as set forth in subsections (1) through (6) above which admission is a matter of record, whether or not such person or business entity was subject to prosecution for the offense or offenses admitted to; or

8) Has entered a plea of *nolo contendere* to charge of bribery, price-fixing, bid-rigging, or fraud, as set forth in sub-paragraphs (1) through (6) above.

In the case of bribery or attempting to bribe, a business entity may not be awarded a contract if an official, agent or employee of such business entity committed the Prohibited Act on behalf of the business entity and pursuant to the direction or authorization of an officer, director or other responsible official of the business entity, and such Prohibited Act occurred within three years prior to the award of the contract. In addition, a business entity shall be disqualified if an owner, partner or shareholder controlling, directly or indirectly, 20 % or more of the business entity or an officer of the business entity has performed any Prohibited Act within five years prior to the award of the Contract.

THE UNDERSIGNED HEREBY CERTIFIES THAT: The Undersigned has read the provisions of Section A, Persons and Entities Subject to Disqualification, that the Undersigned has not committed any Prohibited Act set forth in Section A, and that award of the Contract to the Undersigned would not violate the provisions of such Section or of the Code.

B. BID-RIGGING OR BID ROTATING

THE UNDERSIGNED HEREBY CERTIFIES THAT: *In accordance with 720 ILCS 5/33 E-11, neither the Undersigned nor any Affiliated Entity is barred from award of this Contract as a result of a conviction for the violation of State laws prohibiting bid-rigging or bid rotating.*

C. **DRUG FREE WORKPLACE ACT**

THE UNDERSIGNED HEREBY CERTIFIES THAT: The Undersigned will provide a drug free workplace, as required by Public Act 86-1459 (30 ILCS 580/2-11).

D. **DELINQUENCY IN PAYMENT OF TAXES**

THE UNDERSIGNED HEREBY CERTIFIES THAT: *The Undersigned is not an owner or a party responsible for the payment of any tax or fee administered by Cook County, by a local municipality, or by the Illinois Department of Revenue, which such tax or fee is delinquent, such as bar award of a contract or subcontract pursuant to the Code, Chapter 34, Section 34-129.*

E. **HUMAN RIGHTS ORDINANCE**

No person who is a party to a contract with Cook County ("County") shall engage in unlawful discrimination or sexual harassment against any individual in the terms or conditions of employment, credit, public accommodations, housing, or provision of County facilities, services or programs (Code Chapter 42, Section 42-30 *et seq*).

F. **ILLINOIS HUMAN RIGHTS ACT**

THE UNDERSIGNED HEREBY CERTIFIES THAT: *It is in compliance with the the Illinois Human Rights Act (775 ILCS 5/2-105), and agrees to abide by the requirements of the Act as part of its contractual obligations.*

G. **MACBRIDE PRINCIPLES, CODE CHAPTER 34, SECTION 34-132**

If the primary contractor currently conducts business operations in Northern Ireland, or will conduct business during the projected duration of a County contract, the primary contractor shall make all reasonable and good faith efforts to conduct any such business operations in Northern Ireland in accordance with the MacBride Principles for Northern Ireland as defined in Illinois Public Act 85-1390.

H. **LIVING WAGE ORDINANCE PREFERENCE (COOK COUNTY CODE, CHAPTER 34, SECTION 34-127;**

The Code requires that a living wage must be paid to individuals employed by a Contractor which has a County Contract and by all subcontractors of such Contractor under a County Contract, throughout the duration of such County Contract. The amount of such living wage is determined from time to time by, and is available from, the Chief Financial Officer of the County.

For purposes of this EDS Section 4, H, "Contract" means any written agreement whereby the County is committed to or does expend funds in connection with the agreement or subcontract thereof. The term "Contract" as used in this EDS, Section 4, I, specifically excludes contracts with the following:

1) Not-For Profit Organizations (defined as a corporation having tax exempt status under Section 501(C)(3) of the United State Internal Revenue Code and recognized under the Illinois State not-for - profit law);

2) Community Development Block Grants;

3) President's Office of Employment Training;

4) Sheriff's Work Alternative Program; and

5) Department of Correction inmates.

REQUIRED DISCLOSURES
(SECTION 5)

1. DISCLOSURE OF LOBBYIST CONTACTS

List all persons or entities that have made lobbying contacts on your behalf with respect to this contract:

Name	Address
N/A	

2. LOCAL BUSINESS PREFERENCE DISCLOSURE; CODE, CHAPTER 34, SECTION 34-151(p);

"Local Business" shall mean a person authorized to transact business in this State and having a bona fide establishment for transacting business located within Cook County at which it was actually transacting business on the date when any competitive solicitation for a public contract is first advertised or announced and further which employs the majority of its regular, full time work force within Cook County, including a foreign corporation duly authorized to transact business in this State and which has a bona fide establishment for transacting business located within Cook County at which it was actually transacting business on the date when any competitive solicitation for a public contract is first advertised or announced and further which employs the majority of its regular, full time work force within Cook County.

a) Is Bidder a "Local Business" as defined above?

Yes:_____ No: X

b) If yes, list business addresses (es) within Cook County:
N/A

c) Does Bidder employ the majority of its regular full-time workforce within Cook County?

Yes:_____ No: X

3. THE CHILD SUPPORT ENFORCEMENT ORDINANCE (PREFERENCE (CODE, CHAPTER 34, SECTION 34-366)

Every Applicant for a County Privilege shall be in full compliance with any child support order before such Applicant is entitled to receive or renew a County Privilege. When delinquent child support exists, the County shall not issue or renew any County Privilege, and may revoke any County Privilege. All Applicants are required to review the Cook County Affidavit of Child Support Obligations attached to this EDS **and** complete the following, based upon the definitions and other information included in such Affidavit:

_____ Applicant has no "Substantial Owner."

OR

X The Cook County Affidavit of Child Support Obligations has been completed by all "Substantial Owners" and is attached to this EDS.

4. **REAL ESTATE OWNERSHIP DISCLOSURES.**

The Undersigned must indicate by checking the appropriate provision below and providing all required information that either:

a)_____The following is a complete list of all real estate owned by the Undersigned in Cook County:

PERMANENT INDEX NUMBER(S): _____

_____

_____

(ATTACH SHEET IF NECESSARY TO LIST ADDITIONAL INDEX NUMBERS)

OR:

b)__X___The Undersigned owns no real estate in Cook County.

5. **EXCEPTIONS TO CERTIFICATIONS OR DISCLOSURES.**

If the Undersigned is unable to certify to any of the Certifications or any other statements contained in this EDS and not explained elsewhere in this EDS, the Undersigned must explain below:

NA

_____

If the letters, "NA", the word "None" or "No Response" appears above, or if the space is left blank, it will be conclusively presumed that the Undersigned certified to all Certifications and other statements contained in this EDS.

COOK COUNTY DISCLOSURE OF OWNERSHIP INTEREST STATEMENT
(Section 5)

The Cook County Code of Ordinances (§2-610 *et seq.*) requires that any Applicant for any County Action must disclose information concerning ownership interests in the Applicant. This Disclosure of Ownership Interest Statement must be completed with all information current as of the date this Statement is signed. Furthermore, this Statement must be kept current, by filing an amended Statement, until such time as the County Board or County Agency shall take action on the application. The information contained in this Statement will be maintained in a database and made available for public viewing.

If you are asked to list names, but there are no applicable names to list, you must state NONE. An incomplete Statement will be returned and any action regarding this contract will be delayed. A failure to fully comply with the ordinance may result in the action taken by the County Board or County Agency being voided.

"*Applicant*" means any Entity or person making an application to the County for any County Action.

"County Action" means any action by a County Agency, a County Department, or the County Board regarding an ordinance or ordinance amendment, a County Board approval, or other County agency approval, with respect to contracts, leases, or sale or purchase of real estate.

"Entity" or *"Legal Entity"* means a sole proprietorship, corporation, partnership, association, business trust, estate, two or more persons having a joint or common interest, trustee of a land trust, other commercial or legal entity or any beneficiary or beneficiaries thereof.

This Disclosure of Ownership Interest Statement must be submitted by :

1. An Applicant for County Action and
2. An individual or Legal Entity that holds stock or a beneficial interest in the Applicant and is listed on the Applicant's Statement (a "Holder") must file a Statement and complete #1 only under **Ownership Interest Declaration.**

Please print or type responses clearly and legibly. Add additional pages if needed, being careful to identify each portion of the form to which each additional page refers.

This Statement is being made by the [x] Applicant or [ ] Stock/Beneficial Interest Holder

This Statement is an: [ ] Original Statement or [ ] Amended Statement

Identifying Information:

Name Landmark Contractors D/B/A: N/A EIN NO.: 36-3584676

Street Address: 11916 W. Main St.

City: Huntley State: IL Zip Code: 60142

Phone No.: 847-669-5474

Form of Legal Entity:

[ ] Sole Proprietor [ ] Partnership [X] Corporation [ ] Trustee of Land Trust

[ ] Business Trust [ ] Estate [ ] Association [ ] Joint Venture

[ ] Other (describe) _____

Ownership Interest Declaration:

1. List the name(s), address, and percent ownership of each individual and each Entity having a legal or beneficial interest (including ownership) of more than five percent (5%) in the Applicant/Holder.

Name	Address	Percentage Interest in Applicant/Holder
Barry Borchart	12411 Hensel Rd., Huntley, IL	100%

2. If the interest of any individual or any Entity listed in (1) above is held as an agent or agents, or a nominee or nominees, list the name and address of the principal on whose behalf the interest is held.

Name of Agent/Nominee	Name of Principal	Principal's Address
N/A		

3. Is the Applicant constructively controlled by another person or Legal Entity? [ ] Yes [X] No

If yes, state the name, address and percentage of beneficial interest of such person or legal entity, and the relationship under which such control is being or may be exercised.

Name	Address	Percentage of Beneficial Interest	Relationship
N/A			

Declaration (check the applicable box):

[X] I state under oath that the Applicant has withheld no disclosure as to ownership interest in the Applicant nor reserved any information, data or plan as to the intended use or purpose for which the Applicant seeks County Board or other County Agency action.

[ ] I state under oath that the Holder has withheld no disclosure as to ownership interest nor reserved any information required to be disclosed.

Barry Borchart
Name of Authorized Applicant/Holder Representative (please print or type)

President
Title

Signature

3/26/14
Date

estimating@golandmark.com
E-mail address

847-669-5474
Phone Number

Subscribed to and sworn before me
this 26 day of March, 2014

My commission expires: 8/18/14

X
Notary Public Signature

OFFICIAL SEAL
B A BORCHART
NOTARY PUBLIC - STATE OF ILLINOIS
MY COMMISSION EXPIRES:08/18/14

TONI PRECKWINKLE
PRESIDENT, COOK COUNTY
BOARD OF COMMISSIONERS

RANJIT HAKIM
EXECUTIVE DIRECTOR

COOK COUNTY BOARD OF ETHICS
69 W. WASHINGTON STREET, SUITE 3040
CHICAGO, ILLINOIS 60602
312/603-4304 OFFICE
312/603-9988 FAX

BOARD OF ETHICS MEMBERS
ROSEANN OLIVER, CHAIR
PASTOR SAMUEL E. HINKLE III
ANNE I. SHAW
JUAN CALIXTO
MARIBETH VANDER WEELE

Dear Bidder:

Thank you for attending this pre-bid meeting. Cook County looks forward to receiving your cost-effective and responsible bid. In addition to considering any specifications or qualifications for the good(s) and/or service(s) requested by the County, I want to remind you that any business you do with the County will also be governed by the Cook County Ethics Ordinance. The entire Ethics Ordinance is available for your review online at the Board of Ethics website.[1] The enclosed packet highlights three provisions of the Ethics Ordinance that I would like you to be particularly aware of as you submit your bid and begin or continue doing business with the County.

Please review this packet carefully and do not hesitate to get in touch with my office if you have any questions or concerns. Thank you in advance for doing your part to ensure that the residents of Cook County get the fair and honest government they fund and for ensuring that County officials, candidates for elected office, board and commission appointees, employees and persons who have done, are doing or are seeking to do business with the County remain in compliance with the Ethics Ordinance.

Sincerely,

Ranjit Hakim
Executive Director

[1] http://www.cookcountygov.com/portal/server.pt/community/board_of_ethics/293/ethics%2C_board_of/401

rev. 12/13

Below is a highlight of three provisions of the Ethics Ordinance that are particularly relevant to individuals and companies doing or seeking to do business with the County. Keep in mind that in addition to other potential civil and criminal sanctions for violating the Ethics Ordinance, any lease, contract, purchase or sale "negotiated, entered into, or performed" in violation of the Ethics Ordinance is voidable by the County.

A. Gift Ban

Doing or seeking to do any business with the County makes you a prohibited source for the purpose of the County's gift ban. As a prohibited source you should not intentionally offer or make a gift to any County official, board or commission appointee or employee. The same prohibition extends to a gift to the spouse of, or other immediate family member living with, any County official, board or commission appointee or employee. A "gift," for the purpose of the Ethics Ordinance, means ***"any gratuity, discount, entertainment, hospitality, loan, forbearance, or other tangible or intangible item having monetary value including, but not limited to, cash, food and drink, and honoraria for speaking engagements[.]"*** This does not mean a lawful campaign contributions made pursuant to the Election Code or the Ethics Ordinance. Your campaign contributions are regulated by a separate provision of the Ethics Ordinance. *See* Part C, below.

There are various exceptions to the County's gift ban, including an exception for small gifts (or a series of gifts) valued in aggregate at less than $100 during any calendar year, and food and refreshments consumed on the premises where the food is purchased, prepared or catered valued in aggregate at less than $75 per person on a single calendar day. Contact the Board of Ethics if you believe that an exception applies to a gift that you intend to provide to a County official, board or commission appointee or employee, but even when technically permissible, it is always appropriate for you to refrain from giving gifts to avoid even the appearance of impropriety. Err on the side of caution because any person who violates the gift ban exposes themselves to a minimum fine of $1,001 and conviction for a business offense.

Remember that all County officials, board or commission appointees and employees must disclose any gifts they receive from you in a 12-month period with an aggregate value greater than $100; so if you do give a gift, consider providing the recipient with the attached gift disclosure form (Attachment A). Remember also that it is illegal for any County official, board or commission appointee or employee to solicit a gift from you. Contact the Board of Ethics if you ever feel pressured to give a gift by any County official, board or commission appointee or employee.

B. Nepotism Disclosure Requirement

Doing a significant amount of business with the County also requires that you disclose to the Board of Ethics the existence of any familial relationships with any County employee or any person holding elective office in the State of Illinois, the County, or in any municipality within the County. The Ethics Ordinance defines a significant amount of business for the purpose of this disclosure requirement as more than $25,000 in aggregate County leases, contracts, purchases or sales in any calendar year.

If you are unsure of whether the business you do with the County or a County agency will cross this threshold, err on the side of caution by completing the attached familial disclosure form (Attachment B) because, among other potential penalties, any person found guilty of failing to make a required disclosure or knowingly filing a false, misleading, or incomplete disclosure will be prohibited from doing any business with the County for a period of three years. The required disclosure should be filed with the Board of Ethics by January 1 of each calendar year in which you are doing business with the County and again with each bid/proposal/quotation to do business with Cook County. The Board of Ethics may assess a late filing fee of $100 per day after an initial 30-day grace period.

The person that is doing business with the County must disclose his or her familial relationships. The Ethics Ordinance defines a familial relationship to mean any spouse, domestic partner or civil union partner of a County employee or State, County or municipal official and any person who is related to such an employee or official, whether by blood, marriage (*i.e.* in laws and step relations) or adoption as a parent, child, sibling, aunt, uncle, niece, nephew, grandparent or grandchild. If the person on the County lease or contract or purchasing from or selling to the County is a business entity, then the business entity must disclose the familial relationships of the individuals who are and, during the year prior to doing business with the County, were:

- its board of directors,
- its officers,
- its employees or independent contractors responsible for the general administration of the entity,
- its agents authorized to execute documents on behalf of the entity, and
- its employees who directly engage or engaged in doing work with the County on behalf of the entity.

Do not hesitate to contact the Board of Ethics for assistance in determining the scope of any required familial relationship disclosure.

C. **Campaign Contribution Regulations**

In addition to any campaign contribution limits that may apply to your contributions to any candidate for office under federal or state law, doing business or seeking to do business with the County imposes additional campaign contribution limits with respect to contributions to all candidates for elected County offices, including the elected officials currently holding County offices. Persons who have done, are doing or are seeking to do business with the County cannot give more than $750 in any nonelection year to a candidate for County office (or a local, state or federal campaign committee controlled by or established in support of a candidate for County office). During an election year in which the intended recipient is a candidate for County office, persons who have done, are doing or are seeking to do business with the County may make a maximum contribution of $750 to a candidate for County office during the primary election and another maximum contribution of $750 to the same candidate during the general election even if both elections take place in the same calendar year.

A person is considered to ***"have done"*** or be ***"doing"*** business with the County for the

purpose of these campaign contribution regulations if the *person* currently or during any consecutive 12-month period during the previous four years had more than $10,000 in aggregate County leases, contracts, purchases or sales. A person is ***"seeking"*** to do business with the County if, in the previous six months the person pursued leases, contracts, purchases or sales that, if successful, would meet the qualifications for doing business with the County. If the ***"person"*** on the County lease or contract or purchasing from or selling to the County is a business entity, then this portion of the Ethics Ordinance does not limit the campaign contributions of the entity's affiliated companies or its employees, officers, directors and partners so long as none of these entities or individuals receive reimbursements from the restricted entity for their campaign contributions. Contact the Board of Ethics about additional regulations that apply to firms and employees of firms contracting with the County to provide financial audits or to act as counsel or a financial manager in connection with a County bond issuance. Knowing violations of any of these campaign contribution regulations can result in a fine of $500 to $5,000 for any single offense.

Remember that even lawful political contributions to County officials and candidates for County office are never a prerequisite to doing or continuing to do business with the County. If any County official, candidate for County office or any person purporting to represent such an official or candidate tells you otherwise, notify the Board of Ethics, the Office of the Independent Inspector General or law enforcement immediately.

COOK COUNTY BOARD OF ETHICS
GIFT DISCLOSURE FORM

A. **RECIPIENT INFORMATION**

Name of Recipient: N/A

If Recipient is not a County official, board or commission appointee or employee, name of spouse or family member who is a County official, board or commission appointee ("Indirect Recipient"): N/A

County title or position of Recipient or Indirect Recipient: N/A

County department/agency/board/commission of Recipient or Indirect Recipient: N/A

County office address of Recipient or Indirect Recipient: N/A

County office phone number of Recipient or Indirect Recipient: N/A

County email address of Recipient or Indirect Recipient: N/A

B. **DONOR INFORMATION**

Name of Donor: N/A

Occupation and Employer of Donor: N/A

Address of Donor: N/A

Phone number of Donor: N/A

Email address of Donor: N/A

C. **GIFT INFORMATION**

Description of Gift: N/A

Date of receipt of Gift: N/A

Disclosure to the Board of Ethics must be made within ten business days of receipt.

Value of Gift: $ N/A

Attach documentation supporting this figure, e.g., a receipt, a written verification by Donor or other support for the estimated market value.

D. **IF GIFT RECEIVED IN CONNECTION WITH PARTICIPATING IN AN EVENT**

Please attach brochures, invitations, agenda, program books or other relevant information.

Name of Event: N/A

Date of Event: N/A

Sponsoring Organization(s): N/A

Purpose of Event: N/A

Subject of presentation (if applicable): N/A

Cook County Board of Ethics - Gift Disclosure Form, Rev. 11/2013 (continued)

E. USE OR DISPOSITION OF GIFT

Please check all that apply and provide related information where needed.

☐ Gift will be retained/used by Recipient or Indirect Recipient. If relevant, please identify which exception to the gift ban applies to acceptance of the gift. *See* Ethics Ordinance, § 574(b) (Cook County Code of Ordinances, Part I, Chapter 2, Article VII, Division 2, Subdivision II, Section 574).

_____

☐ Gift or amount of money equal to the value of the Gift has been donated to a non-profit or charitable organization exempt from income taxation under Section 501(c)(3) of the Internal Revenue Code.

Please attach supporting documentation, including the receipt or acknowledgment of the donation from the 501(c)(3) organization.

Name of Organization: _____

Date of Donation: _____

Donation Contact Person at Organization: _____

Address: _____

Phone number: _____

Email address: _____

☐ Gift has been returned to Donor.

Please attach supporting documentation (e.g., a letter accompanying the return of Gift or an acknowledgment from Donor that the gift was returned).

Date of Return of Gift: _____

☐ Recipient has paid/reimbursed the donor for the market value of the gift.

Please attach supporting documentation, including the receipt or acknowledgment of receipt of payment.

Date of Payment: _____

VERIFICATION: To the best of my knowledge, the information I have provided on this gift disclosure form is accurate and complete. I acknowledge that an inaccurate or incomplete disclosure is punishable by law, including but not limited to fines.

Signature of Recipient _____ Date 3/26/14

SUBMIT COMPLETED FORM TO: Cook County Board of Ethics
69 West Washington Street, Suite 3040, Chicago, Illinois 60602
Office (312) 603-4304 – Fax (312) 603-9988
CookCounty.Ethics@cookcountyil.gov

COOK COUNTY BOARD OF ETHICS
69 W. WASHINGTON STREET, SUITE 3040
CHICAGO, ILLINOIS 60602
312/603-4304
312/603-9988 FAX 312/603-1011 TT/TDD

FAMILIAL RELATIONSHIP DISCLOSURE PROVISION:

Section 2-582 of the Cook County Ethics Ordinance requires any person or persons doing business with Cook County, upon execution of a contract with Cook County, to disclose to the Cook County Board of Ethics the existence of familial relationships they may have with all persons holding elective office in the State of Illinois, the County of Cook, or in any municipality within the County of Cook.

The required disclosure shall be filed by January 1 of each calendar year and again with each bid/proposal/quotation to do business with Cook County. Any person filing a late disclosure statement after January 31 shall be assessed a late filing fee of $100.00 per day that the disclosure is late. Any person found guilty of violating any provision of this section or knowingly filing a false, misleading, or incomplete disclosure to the Cook County Board of Ethics shall be prohibited, for a period of three (3) years, from engaging, directly or indirectly, in any business with Cook County. *Note*: Please see Chapter 2 Administration, Article VII Ethics, Section 2-582 of the Cook County Code to view the full provisions of this section.

If you have questions concerning this disclosure requirement, please call the Cook County Board of Ethics at (312) 603-4304. *Note*: A current list of contractors doing business with Cook County is available via the Cook County Board of Ethics' website at: **http://www.cookcountygov.com/taxonomy/ethics/Listings/cc_ethics_VendorList_.pdf**

DEFINITIONS:

"*Calendar year*" means January 1 to December 31 of each year.

"*Doing business*" for this Ordinance provision means any one or any combination of leases, contracts, or purchases to or with Cook County or any Cook County agency in excess of $25,000 in any calendar year.

"*Familial relationship*" means a person who is related to an official or employee as spouse or any of the following, whether by blood, marriage or adoption:

- Parent
- Child
- Brother
- Sister
- Aunt
- Uncle
- Niece
- Nephew
- Grandparent
- Grandchild
- Father-in-law
- Mother-in-law
- Son-in-law
- Daughter-in-law
- Brother-in-law
- Sister-in-law
- Stepfather
- Stepmother
- Stepson
- Stepdaughter
- Stepbrother
- Stepsister
- Half-brother
- Half-sister

"*Person*" means any individual, entity, corporation, partnership, firm, association, union, trust, estate, as well as any parent or subsidiary of any of the foregoing, and whether or not operated for profit.

COOK COUNTY BOARD OF ETHICS
FAMILIAL RELATIONSHIP DISCLOSURE FORM

A. PERSON DOING OR SEEKING TO DO BUSINESS WITH THE COUNTY

Name of Person Doing Business with the County: Landmark Contractors

Address of Person Doing Business with the County: 11916 W. Main St., Huntley

Phone number of Person Doing Business with the County: 847-669-5474

Email address of Person Doing Business with the County: estimating@golandmark.com

If Person Doing Business with the County is a Business Entity, provide the name, title and contact information for the individual completing this disclosure on behalf of the Person Doing Business with the County: Barry Borchart - 12411 Hensel Rd, Huntley - (847)6695474

B. DESCRIPTION OF BUSINESS WITH THE COUNTY

Append additional pages as needed and for each County lease, contract, purchase or sale sought and/or obtained during the calendar year of this disclosure (or the proceeding calendar year if disclosure is made on January 1), identify:

The lease number, contract number, purchase order number, request for proposal number and/or request for qualification number associated with the business you are doing or seeking to do with the County: 13-W4612-07-LS

The aggregate dollar value of the business you are doing or seeking to do with the County: $ 1,700,000

The name, title and contact information for the County official(s) or employee(s) involved in negotiating the business you are doing or seeking to do with the County: N/A

The name, title and contact information for the County official(s) or employee(s) involved in managing the business you are doing or seeking to do with the County: N/A

C. DISCLOSURE OF FAMILIAL RELATIONSHIPS WITH COUNTY EMPLOYEES OR STATE, COUNTY OR MUNICIPAL ELECTED OFFICIALS

Check the box that applies and provide related information where needed

☐ The Person Doing Business with the County **is an individual** and there is **no familial relationship** between this individual and any Cook County employee or any person holding elective office in the State of Illinois, Cook County, or any municipality within Cook County.

☒ The Person Doing Business with the County **is a business entity** and there is **no familial relationship** between any member of this business entity's board of directors, officers, persons responsible for general administration of the business entity, agents authorized to execute documents on behalf of the business entity or employees directly engaged in contractual work with the County on behalf of the business entity, on the one hand, and any Cook County employee or any person holding elective office in the State of Illinois, Cook County, or any municipality within Cook County, on the other.

☐ The Person Doing Business with the County **is an individual and there is a familial relationship** between this individual and at least one Cook County employee and/or a person or persons holding elective office in the State of Illinois, Cook County, and/or any municipality within Cook County. **The familial relationships are as follows:**

Name of Individual Doing Business with the County	Name of Related County Employee or State, County or Municipal Elected Official	Title and Position of Related County Employee or State, County or Municipal Elected Official	Nature of Familial Relationship*
N/A			

If more space is needed, attach an additional sheet following the above format.

☐ The Person Doing Business with the County **is a business entity** and **there is a familial relationship** between at least one member of this business entity's board of directors, officers, persons responsible for general administration of the business entity, agents authorized to execute documents on behalf of the business entity and/or employees directly engaged in contractual work with the County on behalf of the business entity, on the one hand, and at least one Cook County employee and/or a person holding elective office in the State of Illinois, Cook County, and/or any municipality within Cook County, on the other. **The familial relationships are as follows:**

Name of Member of Board of Director for Business Entity Doing Business with the County	Name of Related County Employee or State, County or Municipal Elected Official	Title and Position of Related County Employee or State, County or Municipal Elected Official	Nature of Familial Relationship*
N/A			

Name of Officer for Business Entity Doing Business with the County	Name of Related County Employee or State, County or Municipal Elected Official	Title and Position of Related County Employee or State, County or Municipal Elected Official	Nature of Familial Relationship*
N/A			

Name of Person Responsible for the General Administration of the Business Entity Doing Business with the County	Name of Related County Employee or State, County or Municipal Elected Official	Title and Position of Related County Employee or State, County or Municipal Elected Official	Nature of Familial Relationship*
N/A			

Name of Agent Authorized to Execute Documents for Business Entity Doing Business with the County	Name of Related County Employee or State, County or Municipal Elected Official	Title and Position of Related County Employee or State, County or Municipal Elected Official	Nature of Familial Relationship*
N/A			

Name of Employee of Business Entity Directly Engaged in Doing Business with the County	Name of Related County Employee or State, County or Municipal Elected Official	Title and Position of Related County Employee or State, County or Municipal Elected Official	Nature of Familial Relationship*
N/A			

If more space is needed, attach an additional sheet following the above format.

VERIFICATION: To the best of my knowledge, the information I have provided on this disclosure form is accurate and complete. I acknowledge that an inaccurate or incomplete disclosure is punishable by law, including but not limited to fines and debarment.

Signature of Recipient

3/26/14
Date

SUBMIT COMPLETED FORM TO:

Cook County Board of Ethics
69 West Washington Street, Suite 3040, Chicago, Illinois 60602
Office (312) 603-4304 – Fax (312) 603-9988
CookCounty.Ethics@cookcountyil.gov

* Spouse, domestic partner, civil union partner or parent, child, sibling, aunt, uncle, niece, nephew, grandparent or grandchild by blood, marriage (*i.e.* in laws and step relations) or adoption.

Title 23 United States Code, Section 313

§ 313. Buy America

a. Notwithstanding any other provision of law, the Secretary of Transportation shall not obligate any funds authorized to be appropriated to carry out the Surface Transportation Assistance Act of 1982 (96 Stat. 2097) or this title and administered by the Department of Transportation, unless steel, iron, and manufactured products used in such project are produced in the United States.

b. The provisions of subsection (a) of this section shall not apply where the Secretary finds--
   1. that their application would be inconsistent with the public interest;
   2. that such materials and products are not produced in the United States in sufficient and reasonably available quantities and of a satisfactory quality; or
   3. that inclusion of domestic material will increase the cost of the overall project contract by more than 25 percent.
   4. Redesignated (3)]

c. For purposes of this section, in calculating components' costs, labor costs involved in final assembly shall not be included in the calculation.

d. The Secretary of Transportation shall not impose any limitation or condition on assistance provided under the Surface Transportation Assistance Act of 1982 (96 Stat. 2097) or this title that restricts any State from imposing more stringent requirements than this section on the use of articles, materials, and supplies mined, produced, or manufactured in foreign countries in projects carried out with such assistance or restricts any recipient of such assistance from complying with such State imposed requirements.

e. Intentional violations.--If it has been determined by a court or Federal agency that any person intentionally--
   1. affixed a label bearing a "Made in America" inscription, or any inscription with the same meaning, to any product used in projects to which this section applies, sold in or shipped to the United States that was not made in the United States; or
   2. represented that any product used in projects to which this section applies, sold in or shipped to the United States that was not produced in the United States, was produced in the United States;

   that person shall be ineligible to receive any contract or subcontract made with funds authorized under the Intermodal Surface Transportation Efficiency Act of 1991 pursuant to the debarment, suspension, and ineligibility procedures in subpart 9.4 of chapter 1 of title 48, Code of Federal Regulations.

f. Limitation on applicability of waivers to products produced in certain foreign countries.--If the Secretary, in consultation with the United States Trade Representative, determines that--

1. a foreign country is a party to an agreement with the United States and pursuant to that agreement the head of an agency of the United States has waived the requirements of this section, and
2. the foreign country has violated the terms of the agreement by discriminating against products covered by this section that are produced in the United States and are covered by the agreement,

the provisions of subsection (b) shall not apply to products produced in that foreign country.

g. [(g) Redesignated (f)]

CONTRACTOR'S
CERTIFICATION CONCERNING LABOR STANDARDS
AND
PREVAILING WAGE REUIREMENTS
(SECTION 6)

To Contractor:

Date: 3/26/14
Project Number: 13-W4612-07-LS
Project Name Kedzie Ave - 139th to 135th
139th St - Kedzie Ave to Utica

1. The undersigned, having executed a contract with the County of Cook for the construction of the above identified project, acknowledges that:

   (a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

   (b) Correction of any infractions of the aforesaid conditions, including infractions by any of his Subcontractors and any lower tier subcontractors, is his responsibility.

2. He certifies that:

   (b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

   (c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

3. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

4. **He certifies that:**

   (a) The legal name and the business address of the undersigned are: Landmark Contractors, Inc
   11916 W. Main St.
   Huntley, IL 60142

   (b) The undersigned is (check one):
   ____ Sole Proprietorship
   ____ Partnership
   _X_ Corporation
   ____ Other Organization (Describe)

   (c) The name, title and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
Barry Borchart	President	12411 Hensel Rd., Huntley, IL

(d) The name and address of all other persons, both natural and corporate, having a substantial interest in the undersigned, and the nature of the interest are (if none, so state):

NAME	ADDRESS	NATURE OF INTEREST
None		

(e) The names and addresses and trade classifications of all other building construction contractors in which the undersigned has a substantial interest is (if none, so state):

NAME	ADDRESS	TRADE CLASSIFICATION
None		

Landmark Contractors, Inc
CONTRACTOR

X
SIGNATURE

DATE 3/26/14

SUBCONTRACTOR'S CERTIFICATION CONCERNING
LABOR STANDARDS AND PREVAILING WAGE REQUIREMENTS
(Section 6)

To Contractor:

Date: 3/25/14
Project Number: 13-W4612-07-LS
Project Name Kedzie Ave

1. The undersigned, having executed a contract with Landmark Contractors (Contractor) _____ for Electrical Work (Nature of Work) _____ in the amount of $778,180.00 in the construction of the above-identified project, certifies that:

(a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

(b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

(c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

2. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

3. The workmen will report for duty on TBD (Date)

4. He certifies that:

(a) The legal name and the business address of the undersigned are: Elmund and Nelson Co. 1510 Sheldon Dr. Elgin, IL 60120

(b) The undersigned is (check one):
- ____ Sole Proprietorship
- ____ Partnership
- X Corporation
- ____ Other Organization (Describe)

(c) The name and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
Arlette Nelson	President, 100% Owner	1717 Koda Dr. Marengo IL 60152
Krystyna Fujarowicz	Vice President	606 Littleton Elgin IL 60120

DATE 3/25/14 SUBCONTRACTOR

SUBCONTRACTOR'S CERTIFICATION CONCERNING
LABOR STANDARDS AND PREVAILING WAGE REQUIREMENTS
(Section 6)

To Contractor:

Date: March 12, 2014
Project Number: 1428-13237
Project Name: Kedzie Ave - 139th St to 135th St
139th St - Kedzie Ave to Utica Ave.

1. The undersigned, having executed a contract with _____ (Contractor) _____ for Pavement Marking (Nature of Work) _____ in the amount of $ 15,450.00 in the construction of the above-identified project, certifies that:

   (a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

   (b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

   (c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

2. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

3. The workmen will report for duty on TBD (Date)

4. He certifies that:

   (a) The legal name and the business address of the undersigned are: Marking Specialists Corporation, 214 Crystal St - Ste C, Cary, IL 60013

   (b) The undersigned is (check one):
   - ___ Sole Proprietorship
   - ___ Partnership
   - X Corporation
   - ___ Other Organization (Describe)

   (c) The name and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
Alfredo Zavala	President	1430 Royal Court Elgin, IL 60123
Maria Zavala	Director	Same as above
Robert K. Buerer	V.P.	1622 S. Princeton Arl. Hts., IL 60005
Dolores M. Buerer	Sec./Treas.	Same as above
Robert W. Buerer	Exec. V.P.	532 Glen Gerry Cary, IL 60013

DATE 3/11/14

SUBCONTRACTOR

X Judith M Renzelli
Signature

SUBCONTRACTOR'S CERTIFICATION CONCERNING
LABOR STANDARDS AND PREVAILING WAGE REQUIREMENTS
(Section 6)

To Contractor:

Date: 3/25/14
Project Number: 13-W4612-07-LS
Project Name: Kedzie Ave

1. The undersigned, having executed a contract with Landmark Contractors (Contractor) _____ for HMA Paving (Nature of Work) _____ in the amount of $ ~~20,579.99~~ 14,127.04 in the construction of the above-identified project, certifies that:

(a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

(b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

(c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

2. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

3. The workmen will report for duty on TBD (Date)

4. He certifies that:

(a) The legal name and the business address of the undersigned are:

(b) The undersigned is (check one):
___ Sole Proprietorship
___ Partnership
X Corporation
___ Other Organization (Describe)

(c) The name and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
Fred Rosas	Owner	9550 Sergo Drive Suite 100 McCook, IL 60525

SUBCONTRACTOR

DATE 3/25/14

SUBCONTRACTOR'S CERTIFICATION CONCERNING LABOR STANDARDS AND PREVAILING WAGE REQUIREMENTS

(Section 6)

To Contractor:

Date: 3/25/14
Project Number: 13-W4612-07-LS
Project Name Kedzie Ave

1. The undersigned, having executed a contract with Landmark Contractors (Contractor) for Environmental (Nature of Work) Consulting in the amount of $58,400.00 in the construction of the above-identified project, certifies that:

   (a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

   (b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

   (c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

2. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

3. The workmen will report for duty on TBD (Date)

4. He certifies that:

   (a) The legal name and the business address of the undersigned are:

   (b) The undersigned is (check one):
   - ___ Sole Proprietorship
   - ___ Partnership
   - ✓ Corporation
   - ___ Other Organization (Describe)

   (c) The name and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
DANIEL HORVATH	PRES	POB 123, Geneva, IL 60134

DATE 3-25-14

SUBCONTRACTOR

President

SUBCONTRACTOR'S CERTIFICATION CONCERNING
LABOR STANDARDS AND PREVAILING WAGE REQUIREMENTS
(Section 6)

To Contractor:

Date: 3/25/14
Project Number: 13-W4612-07-LS
Project Name Kedzie Ave

1. The undersigned, having executed a contract with Landmark Contractors (Contractor) _____ for tree removal / (Nature of Work) tree pruning in the amount of $ 5,620 in the construction of the above-identified project, certifies that:

   (a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

   (b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

   (c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

2. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

3. The workmen will report for duty on TBD (Date)

4. He certifies that:

   (a) The legal name and the business address of the undersigned are:

   (b) The undersigned is (check one):
   ___ Sole Proprietorship
   ___ Partnership
   X Corporation
   ___ Other Organization (Describe)

   (c) The name and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
Kelly Kelly	president	31064 N IL Route 83
PJ Kelly	VP	Grayslake, IL 60030

DATE 3/25/14

SUBCONTRACTOR

SUBCONTRACTOR'S CERTIFICATION CONCERNING
LABOR STANDARDS AND PREVAILING WAGE REQUIREMENTS
(Section 6)

To Contractor:

Date: 3/25/14
Project Number: 13-W4612-07-LS
Project Name Kedzie Ave

1. The undersigned, having executed a contract with Landmark Contractors (Contractor)

for TRAFFIC CONTROL (Nature of Work)

in the amount of $_____ in the construction of the above-identified project, certifies that:

(a) The Labor Standards provisions of the Contract for Construction are included in the aforesaid contract.

(b) Neither he nor any firm, corporation, partnership or association in which he has a substantial interest is designated as an ineligible contractor by the Comptroller General of the United States pursuant to Section 5.6(b) of the Regulations of the Secretary of Labor, Part 5 (29CFR Part 5) or pursuant to the Section 3(a) of the Davis-Bacon Act, as amended [40 U.S.C. 276a-2(a)]

(c) No part of the aforementioned Contract has been or will be subcontracted to any Subcontractor if such Subcontractor or any firm, corporation, partnership or association in which such Subcontractor has a substantial interest is designated as an ineligible Contractor pursuant to any of the aforementioned regulatory or statutory provisions.

2. He agrees to obtain and forward to the aforementioned recipient within ten days after the execution of any subcontract, including those executed by his Subcontractor any lower tier subcontractor, a Subcontractor's Certification Concerning Labor Standards and Prevailing Wages Requirements executed by the Subcontractors.

3. The workmen will report for duty on TBD (Date)

4. He certifies that:

(a) The legal name and the business address of the undersigned are:

(b) The undersigned is (check one):
- ___ Sole Proprietorship
- ___ Partnership
- X Corporation
- ___ Other Organization (Describe)

(c) The name and address of the owner, partners or officers of the undersigned are:

NAME	TITLE	ADDRESS
ROBERT CHIOINE	CEO	9N 439 OAK TREE LN, ELGIN IL, 60124
MARGUERITE CHIOINE	VP	" "
MICHAEL CHIOINE	VP	237 SPRINGSIDE DR, ELGIN IL, 60124
PAUL CHIOINE	PRES	575 COLE DR, S. ELGIN IL, 60124

DATE 3-25-14

SUBCONTRACTOR

X_____
SIGNATURE

SIGNATURE BY A SOLE PROPRIETOR
(SECTION 6)

The Undersigned hereby certifies and warrants: that all of the statements, certifications and representations set forth in this EDS are true, complete and correct; that the Undersigned is in full compliance and will continue to be in compliance throughout the term of the Contract or County Privilege issued to the Undersigned with all the policies and requirements set forth in this EDS; and that all facts and information provided by the Undersigned in this EDS are true, complete and correct. The Undersigned agrees to inform the Cook County Chief Procurement Officer in writing if any of such statements, certifications, representations, facts or information becomes or is found to be untrue, incomplete or incorrect during the term of the Contract or County Privilege.

BUSINESS NAME:_____

BUSINESS ADDRESS:_____

_____

BUSINESS TELEPHONE:_____ FAX NUMBER:_____

FEIN/SSN:_____

COOK COUNTY BUSINESS REGISTRATION NUMBER:_____

SOLE PROPRIETOR'S SIGNATURE: _____

PRINT NAME: _____

DATE: _____

Subscribed to and sworn before me this

_____ day of _____, 20___.

My commission expires:

X_____ _____
Notary Public Signature Notary Seal

SIGNATURE BY A PARTNERSHIP (AND/OR A JOINT VENTURE)
(SECTION 7)

The Undersigned hereby certifies and warrants: that all of the statements, certifications, and representations set forth in this EDS are true, complete and correct; that the Undersigned is in full compliance and will continue to be in compliance throughout the term of the Contract or County Privilege issued to the Undersigned with all the policies and requirements set forth in this EDS; and that all of the facts and information provided by the Undersigned in this EDS are true, complete and correct. The Undersigned agrees to inform the Cook County Chief Procurement Officer in writing if any of such statements, certifications, representations, facts or information becomes or is found to be untrue, incomplete or incorrect during the term of the Contract or County Privilege. .

BUSINESS NAME:_____

BUSINESS ADDRESS:_____

_____

BUSINESS TELEPHONE:_____ FAX NUMBER:_____

CONTACT PERSON:_____ FEIN/SSN:_____

*COOK COUNTY BUSINESS REGISTRATION NUMBER:_____

SIGNATURE OF PARTNER AUTHORIZED TO EXECUTE CONTRACTS ON BEHALF OF PARTNERSHIP:

*BY: _____

Date:_____

Subscribed to and sworn before me this

_____ day of _____, 20___.

My commission expires:

X_____ _____

Notary Public Signature Notary Seal

* **Attach hereto a partnership resolution or other document authorizing the individual signing this Signature Page to so sign on behalf of the Partnership.**

SIGNATURE BY A CORPORATION
(SECTION 8)

The Undersigned hereby certifies and warrants: that all of the statements, certifications, and representations set forth in this EDS are true, complete and correct; that the Undersigned is in full compliance and will continue to be in compliance throughout the term of the Contract or County Privilege issued to the Undersigned with all the policies and requirements set forth in this EDS; and that all of the facts and information provided by the Undersigned in this EDS are true, complete and correct. The Undersigned agrees to inform the Cook County Chief Procurement Officer in writing if any of such statements, certifications, representations, facts or information becomes or is found to be untrue, incomplete or incorrect during the term of the Contract or County Privilege.

BUSINESS NAME: Landmark Contractors, Inc

BUSINESS ADDRESS: 11916 W. Main St., Huntley

BUSINESS TELEPHONE: 847-669-5474 FAX NUMBER: 847-669-5529

CONTACT PERSON: Barry Borchart

FEIN: 36-3584676 *IL CORPORATE FILE NUMBER: 54938233

LIST THE FOLLOWING CORPORATE OFFICERS:

PRESIDENT: Barry Borchart VICE PRESIDENT: "none"

SECRETARY: CJ Graves TREASURER: "none"

**SIGNATURE OF PRESIDENT:

ATTEST: (CORPORATE SECRETARY)

Subscribed and sworn to before me this

26 day of March, 2014.

My commission expires: 8/18/14

OFFICIAL SEAL
B A BORCHART
NOTARY PUBLIC - STATE OF ILLINOIS
MY COMMISSION EXPIRES:08/18/14

X
Notary Public Signature

Notary Seal

* **If the corporation is not registered in the State of Illinois, a copy of the Certificate of Good Standing from the state of incorporation must be submitted with this Signature Page.**

** **In the event that this Signature Page is signed by any persons than the President and Secretary, attach either a certified copy of the corporate by-laws, resolution or other authorization by the corporation, authorizing such persons to sign the Signature Page on behalf of the corporation.**

COOK COUNTY SIGNATURE PAGE
(SECTION 9)

ON BEHALF OF THE COUNTY OF COOK, A BODY POLITIC AND CORPORATE OF THE STATE OF ILLINOIS, THIS CONTRACT IS HEREBY EXECUTED BY:

Shan E. M

COOK COUNTY CHIEF PROCUREMENT OFFICER

DATED AT CHICAGO, ILLINOIS THIS 11 DAY OF July, 20 14.

IN THE CASE OF A BID, THE COUNTY HEREBY ACCEPTS:

THE FOREGOING BID AS IDENTIFIED IN THE CONTRACT DOCUMENTS FOR CONTRACT NUMBER

1428-13237

OR

ITEM(S), SECTION(S), PART(S): Federal Project No.: TE-HPP-1375(002)

Federal Job No.: C-91-288-13 Section No.: 13-W4612-07-LS

TOTAL AMOUNT OF CONTRACT: $ 2,035,543.48
(DOLLARS AND CENTS)

FUND CHARGEABLE:

APPROVED AS TO FORM:

Julia C. Sumaski

ASSISTANT STATE'S ATTORNEY

SURETY'S STATEMENT
of
QUALIFICATION FOR BONDING
(Section 10)

This document must be accurately executed (by the Surety Company) and yielded as part of this Bid.

IF THIS DOCUMENT IS NOT ACCURATELY EXECUTED AND SUBMITTED WITH THE BID PACKAGE, THIS CONSTITUTES CAUSE FOR DISQUALIFICATION OF THE VENDOR FROM BIDDING ON THIS CONTRACT.

The undersigned confirms that: Washington International Insurance Company
(SURETY COMPANY)

would execute a Performance/Payment Bond in favor of the County of Cook for the full amount
Kedzie Avenue - 139th St. to 135th St.
of the bid/contract: 139th Street - Kedzie Ave. to Utica Ave.
(NUMBER)
to: Landmark Contractors, Inc.
(BIDDER)

The penalty of this bond is to be $ 100% of the Contract Amount
(TOTAL DOLLAR AMOUNT OF CONTRACT)

SURETY Washington International Insurance Company
(SURETY COMPANY'S AUTHORIZED SIGNATURE)

CORPORATE

BY:
(ATTORNEY-IN-FACT) Carol A. Dougherty

A+ XV 29874
AMB # NAIC

SEAL

Surety Company Acknowledgement

STATE OF **ILLINOIS**
COUNTY OF **COOK** SS:

On this **26th day of March, 2014**, before me personally appeared **Carol A. Dougherty ,** to me known, who, being by me duly sworn, did depose and say: that (s)he resides at **Palatine, Illinois**, that (s)he is the **Attorney in Fact** of **Washington International Insurance Company,** the corporation described in and which executed the annexed instrument; that (s)he knows the corporate seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by order of the Board of Directors of said corporation; that (s)he signed his/her name thereto by like order; and that the liabilities of said corporation do not exceed its assets as ascertained in the manner provided by law.

Sherene L. Hemler

Notary Public in and for the above County and State

My Commission Expires: **03/29/18**

"OFFICIAL SEAL"
SHERENE L. HEMLER
Notary Public, State of Illinois
My Commission Expires 3/29/18

NAS SURETY GROUP

NORTH AMERICAN SPECIALTY INSURANCE COMPANY
WASHINGTON INTERNATIONAL INSURANCE COMPANY

GENERAL POWER OF ATTORNEY

KNOW ALL MEN BY THESE PRESENTS, THAT North American Specialty Insurance Company, a corporation duly organized and existing under laws of the State of New Hampshire, and having its principal office in the City of Manchester, New Hampshire, and Washington International Insurance Company, a corporation organized and existing under the laws of the State of New Hampshire and having its principal office in the City of Schaumburg, Illinois, each does hereby make, constitute and appoint:

J.S. POHL, ROBERT B. SCHUTZ, JAMES L. SULKOWSKI, CAROL A. DOUGHERTY,
ROBERT E. KAPPUS, SHERENE L. HEMLER and SARAH GREEN

JOINTLY OR SEVERALLY

Its true and lawful Attorney(s)-in-Fact, to make, execute, seal and deliver, for and on its behalf and as its act and deed, bonds or other writings obligatory in the nature of a bond on behalf of each of said Companies, as surety, on contracts of suretyship as are or may be required or permitted by law, regulation, contract or otherwise, provided that no bond or undertaking or contract or suretyship executed under this authority shall exceed the amount of:

FIFTY MILLION ($50,000,000.00) DOLLARS

This Power of Attorney is granted and is signed by facsimile under and by the authority of the following Resolutions adopted by the Boards of Directors of both North American Specialty Insurance Company and Washington International Insurance Company at meetings duly called and held on the 9th of May, 2012:

"RESOLVED, that any two of the Presidents, any Managing Director, any Senior Vice President, any Vice President, any Assistant Vice President, the Secretary or any Assistant Secretary be, and each or any of them hereby is authorized to execute a Power of Attorney qualifying the attorney named in the given Power of Attorney to execute on behalf of the Company bonds, undertakings and all contracts of surety, and that each or any of them hereby is authorized to attest to the execution of any such Power of Attorney and to attach therein the seal of the Company; and it is

FURTHER RESOLVED, that the signature of such officers and the seal of the Company may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, and any such Power of Attorney or certificate bearing such facsimile signatures or facsimile seal shall be binding upon the Company when so affixed and in the future with regard to any bond, undertaking or contract of surety to which it is attached."

NORTH AMERICAN SPECIALTY INSURANCE COMPANY CORPORATE SEAL 1973 NEW HAMPSHIRE

By _____
Steven P. Anderson, Senior Vice President of Washington International Insurance Company
& Senior Vice President of North American Specialty Insurance Company

By _____
David M. Layman, Vice President of Washington International Insurance Company
& Vice President of North American Specialty Insurance Company

WASHINGTON INTERNATIONAL INSURANCE COMPANY CORPORATE SEAL NEW HAMPSHIRE

IN WITNESS WHEREOF, North American Specialty Insurance Company and Washington International Insurance Company have caused their official seals to be hereunto affixed, and these presents to be signed by their authorized officers this 20th day of June, 2012.

North American Specialty Insurance Company
Washington International Insurance Company

State of Illinois
County of Cook ss:

On this 20th day of June, 2012, before me, a Notary Public personally appeared Steven P. Anderson, Senior Vice President of Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company and David M. Layman, Vice President of Washington International Insurance Company and Vice President of North American Specialty Insurance Company, personally known to me, who being by me duly sworn, acknowledged that they signed the above Power of Attorney as officers of and acknowledged said instrument to be the voluntary act and deed of their respective companies.

"OFFICIAL SEAL"
DONNA D. SKLENS
Notary Public, State of Illinois
My Commission Expires 10/06/2015

Donna D. Sklens, Notary Public

I, Jeffrey Goldberg, the duly elected Assistant Secretary of North American Specialty Insurance Company and Washington International Insurance Company, do hereby certify that the above and foregoing is a true and correct copy of a Power of Attorney given by said North American Specialty Insurance Company and Washington International Insurance Company, which is still in full force and effect.

IN WITNESS WHEREOF, I have set my hand and affixed the seals of the Companies this 26th day of March, 2014.

Jeffrey Goldberg, Vice President & Assistant Secretary of
Washington International Insurance Company & North American Specialty Insurance Company

COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
TRUST AGREEMENT

THIS TRUST AGREEMENT is made and entered into by and between the County of Cook, by and through the Department of Transportation and Highways, whose address is 69 West Washington, Suite 2300, Chicago, Illinois, 60602, hereinafter called the COUNTY, and_____ whose address is _____, _____, IL hereinafter called the CONTRACTOR, and _____, a FINANCIAL INSTITUTION or trust company located in Cook County, whose deposits are insured by an agency or instrumentality of the federal government and whose address is _____, _____, IL, phone number (_____)_____ hereinafter called the FINANCIAL INSTITUTION. Contact person being _____.

WITNESSETH:

WHEREAS the COUNTY has awarded to the CONTRACTOR Cook County Contract Number **1428-13237**, Federal Project No. **TE-HPP-1375(002)**, Federal Job No. **C-91-288-13** known as **KEDZIE AVENUE – 139th Street to 135th Street and 139th STREET – Kedzie Avenue to Utica Avenue; Section Number 13-W4612-07-LS, Route W46** providing for the construction of a COUNTY highway improvement for a total price of $_____ dollars; and

WHEREAS under Section 5-409 of the Illinois Highway Code, as amended, the COUNTY is authorized to make progress payments as the CONTRACTOR performs the work under the contract and may retain a percentage of progress payments; and

WHEREAS the COUNTY may, at the request of CONTRACTOR, deposit the retainage under a Trust Agreement with a FINANCIAL INSTITUTION of the CONTRACTOR'S choice which is located in Cook County and has been approved for the deposit of such funds by the Superintendent of the Cook County Department of Transportation and Highways pursuant to Cook County Code Section 34-36; and

WHEREAS by execution of this Agreement, the CONTRACTOR and said FINANCIAL INSTITUTION request that the retainage be deposited with said FINANCIAL INSTITUTION as provided by law.

NOW THEREFORE, the parties do hereby agree that:

1. This Agreement shall not change any of the rights, duties, privileges or responsibilities of the parties to the above-referenced construction contract, except as may be provided herein.
2. Notwithstanding the provisions of this Agreement, the COUNTY may withhold progress payments or any portion thereof on account of lien claims, liquidated damages, or as may otherwise be provided by the above contract or by law.
3. All progress payments, including final payment under the above contract, shall be made by COUNTY warrants payable to the CONTRACTOR and FINANCIAL INSTITUTION, as trustee, jointly, and such payments shall be sent to the FINANCIAL INSTITUTION at the above address.

4. The progress payments shall specify on a copy of the COUNTY'S invoice to be mailed with the warrant the amount thereof to be paid to the CONTRACTOR and the amount to be held by the FINANCIAL INSTITUTION as retainage under this Agreement.

5. The money so held by the FINANCIAL INSTITUTION shall be described as "retainage" and shall be held in trust according to the terms of this Agreement. Interest earned on the retainage may be paid to the CONTRACTOR as it accrues or as the FINANCIAL INSTITUTION'S policy permits.

6. The principal balance of the retainage, or any part thereof, shall not be paid over to the CONTRACTOR except upon written directive to the FINANCIAL INSTITUTION by the COUNTY.

7. The FINANCIAL INSTITUTION may invest or reinvest said retainage in:

a. Certificates of Deposit issued by a financial institution whose principal office is located in Cook County, including this FINANCIAL INSTITUTION;

b. United States Government Bonds;

c. United States Treasury Notes;

d. United States Treasury Bills;

e. Time Deposit on Open Account.

Provided, however, that the investment of said retainage shall not relieve the FINANCIAL INSTITUTION from the return or repayment of such funds within ninety (90) days as provided in this Agreement.

8. Retainage is the property of the COUNTY until notice of final payment, and the principal amount, or any part thereof, shall not be pledged or used as security for any purpose.

9. The COUNTY shall be the sole judge of return or repayment of the funds to the Cook County Treasurer. Upon written demand made by the COUNTY to the FINANCIAL INSTITUTION for the return or repayment of the retainage, the FINANCIAL INSTITUTION shall make such return or repayment regardless of whether the COUNTY shall state any reason therefor and without imposition of any other requirements or conditions.

10. The repayment or return of retainage to the COUNTY shall be by check from the FINANCIAL INSTITUTION payable to the Treasurer of Cook County and shall be mailed to the COUNTY within ninety (90) days after the COUNTY'S demand.

11. The CONTRACTOR does not waive or release any rights he has against the COUNTY for breach of contract, including this Agreement, by reason of the repayment by the FINANCIAL INSTITUTION to the COUNTY on account of demand made by the COUNTY.

12. In the event demand for the retainage is made under this Agreement by the COUNTY, the COUNTY may specify, in its sole judgment, the amount to be repaid or returned as all or part of the principal balance of the retainage. This Agreement shall continue as to any retainage not returned to the COUNTY and any future payments by the COUNTY to the CONTRACTOR.

13. Upon return or repayment of the full principal balance of the retainage to the COUNTY, this Agreement shall terminate and have no further force or effect.

14. The COUNTY shall request confirmation of account balances as of June 30 of each year, and the FINANCIAL INSTITUTION shall comply with this request. The FINANCIAL INSTITUTION'S failure to comply with this provision shall be reason to demand return of the retainage pursuant to this Agreement.

15. The COUNTY shall provide notice of final payment to the FINANCIAL INSTITUTION and the CONTRACTOR. When said final payment is made, this Agreement shall be terminated and the retainage or interest thereon shall be paid to the CONTRACTOR by the FINANCIAL INSTITUTION. The COUNTY and the CONTRACTOR agree that the date of mailing such notice of final payment to the FINANCIAL INSTITUTION shall constitute the date of final payment to the CONTRACTOR under the contract. Any provisions of the contract regarding final payment shall be deemed to have been complied with regardless of any delay in the CONTRACTOR'S receiving said final payment or any retainage and interest thereon from the FINANCIAL INSTITUTION.

16. The FINANCIAL INSTITUTION shall look only to the CONTRACTOR to pay any costs or fees for either its services or expenses hereunder and no deduction shall be made therefor for any retainage or interest thereon except such deduction that may be made after final payment has been made.

17. Failure of the FINANCIAL INSTITUTION to comply with any of the terms of this Agreement shall be cause for the COUNTY to refuse approval of the FINANCIAL INSTITUTION as a party to any future Trust Agreements.

IN WITNESS WHEREOF the parties to this Trust Agreement have hereunder signed and executed this Trust Agreement this _____ day of _____, 20__.
(To be dated by the COUNTY.)

CONTRACTOR

_____
Company Name

By: _____
Printed Name: _____
Title: _____

ATTEST: _____
Printed Name: _____
Title: _____

CONTRACTOR (IF JOINT VENTURE)

_____
Company Name

By: _____
Printed Name: _____
Title: _____

ATTEST: _____
Printed Name: _____
Title: _____

CONTRACTOR (IF JOINT VENTURE)

_____
Company Name

By: _____
Printed Name: _____
Title: _____

ATTEST: _____
Printed Name: _____
Title: _____

CONTRACTOR (IF JOINT VENTURE)

_____
Company Name

By: _____
Printed Name: _____
Title: _____

ATTEST: _____
Printed Name: _____
Title: _____

FINANCIAL INSTITUTION

_____

By: _____
Printed Name: _____
Title: _____

ATTEST: _____
Printed Name: _____
Title: _____

COOK COUNTY
DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
By: _____
Superintendent

P.O. Box 1104
11916 W. Main St.
Huntley, IL 60142

LANDMARK CONTRACTORS, INC.

Phone: (847) 669-5474
Fax: (847) 669-5529

May 20, 2014

Cook County Dept of Transportation & Highways
69 W. Washington St, Suite 2260
Chicago, IL 60602

Cook County Contract: 1428-13237
Federal Project: TE-HPP-1375(002)
Federal Job No: C-91-288-13
Known As: Kedzie Ave – 139th Street to 135th Street – Kedzie Ave to Utica Ave.
Section: 13-W4612-07-LS

Dear Sirs;

In reference to the above-mentioned project, please be advised that we have elected to forego the Trust Agreement and deposit retention in a bank located in Cook County. We trust you will release retention in good faith as outlined in the contract.

If you have any questions, please do not hesitate to contact me at your earliest convenience.

Sincerely,

Barry J. Borchart, President
Landmark Contractors, Inc.

Bond Number: 9160126

PERFORMANCE AND PAYMENT BOND TO THE COUNTY OF COOK

Know All Men by These Presents, That we, Landmark Contractors, Inc

as principle, and Washington International Insurance Company

475 N. Martingale Road Suite 850, Schaumburg, IL 60173, as surety, are

held and firmly bound unto the County of Cook in the penal sum of Two Million Thirty Five Thousand

Five Hundred Forty Three and 48/100 Dollars ($ 2,035,543.48), lawful money of the

United States of America, for the payment of which sum of money well and truly to be made, we bind ourselves, our respective heirs, executors, administrators, successors and assigns, firmly, by these presents.

Signed, sealed, and delivered this 21st day of May A.D. 2014.

THE CONDITION OF THE ABOVE OBLIGATION IS SUCH, That whereas, the above bounded principle entered into a certain contract with the County of Cook, bearing date the day of May 21st, 2014 for **KEDZIE AVENUE – 139th Street to 135th Street and 139th STREET – Kedzie Avenue to Utica Avenue** Route **W46**, Section **13-W4612-07-LS** in **Bremen** Township; Cook County Contract No. **1428-13237**.

The terms and conditions of the Illinois Public Construction Bond Act, 30 ILCS 550

The terms and conditions of the Illinois Public Construction Bond Act, 30 ILCS 550 *et seq.* are hereby incorporated by reference.

It is hereby expressly understood and agreed, and made a condition hereof, that any judgment rendered in favor of any person not a party to said contract against the County of Cook in any suit arising out of said contract or its performance, when reasonable notice of the pendency of such suit shall have been given to said principle and to said surety, shall be conclusive against said principle and said surety as to both liability and amount.

In Witness Whereof, said parties hereto have caused this bond to be executed and delivered at Chicago, Illinois, all on the day and year first above written.

Landmark Contractors, Inc.

PRINCIPAL/CONTRACTOR SEAL

By PRESIDENT SECRETARY

Washington International Insurance Company

SURETY SEAL

By A+ XV 32778

Carol A. Dougherty SURETY/ATTORNEY-IN-FACT AMB# NAIC#

(ATTACH POWER OF ATTORNEY)

Approved as to form:

By:

ASSISTANT STATES ATTORNEY

PW5.18

Surety Company Acknowledgement

STATE OF **ILLINOIS**
COUNTY OF **COOK** SS:

On this **21st day of May, 2014**, before me personally appeared **Carol A. Dougherty** , to me known, who, being by me duly sworn, did depose and say: that (s)he resides at **Schaumburg, Illinois**, that (s)he is the **Attorney in Fact** of **Washington International Insurance Company,** the corporation described in and which executed the annexed instrument; that (s)he knows the corporate seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by order of the Board of Directors of said corporation; that (s)he signed his/her name thereto by like order; and that the liabilities of said corporation do not exceed its assets as ascertained in the manner provided by law.

Sherene L. Hemler

Notary Public in and for the above County and State

My Commission Expires: **03/29/18**

"OFFICIAL SEAL"
SHERENE L. HEMLER
Notary Public, State of Illinois
My Commission Expires 3/29/18

NAS SURETY GROUP

NORTH AMERICAN SPECIALTY INSURANCE COMPANY
WASHINGTON INTERNATIONAL INSURANCE COMPANY

GENERAL POWER OF ATTORNEY

KNOW ALL MEN BY THESE PRESENTS, THAT North American Specialty Insurance Company, a corporation duly organized and existing under laws of the State of New Hampshire, and having its principal office in the City of Manchester, New Hampshire, and Washington International Insurance Company, a corporation organized and existing under the laws of the State of New Hampshire and having its principal office in the City of Schaumburg, Illinois, each does hereby make, constitute and appoint:

J.S. POHL, ROBERT B. SCHUTZ, JAMES L. SULKOWSKI, CAROL A. DOUGHERTY,
ROBERT E. KAPPUS, SHERENE L. HEMLER and SARAH GREEN

JOINTLY OR SEVERALLY

Its true and lawful Attorney(s)-in-Fact, to make, execute, seal and deliver, for and on its behalf and as its act and deed, bonds or other writings obligatory in the nature of a bond on behalf of each of said Companies, as surety, on contracts of suretyship as are or may be required or permitted by law, regulation, contract or otherwise, provided that no bond or undertaking or contract or suretyship executed under this authority shall exceed the amount of:

FIFTY MILLION ($50,000,000.00) DOLLARS

This Power of Attorney is granted and is signed by facsimile under and by the authority of the following Resolutions adopted by the Boards of Directors of both North American Specialty Insurance Company and Washington International Insurance Company at meetings duly called and held on the 9th of May, 2012:

"RESOLVED, that any two of the Presidents, any Managing Director, any Senior Vice President, any Vice President, any Assistant Vice President, the Secretary or any Assistant Secretary be, and each or any of them hereby is authorized to execute a Power of Attorney qualifying the attorney named in the given Power of Attorney to execute on behalf of the Company bonds, undertakings and all contracts of surety, and that each or any of them hereby is authorized to attest to the execution of any such Power of Attorney and to attach therein the seal of the Company; and it is

FURTHER RESOLVED, that the signature of such officers and the seal of the Company may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, and any such Power of Attorney or certificate bearing such facsimile signatures or facsimile seal shall be binding upon the Company when so affixed and in the future with regard to any bond, undertaking or contract of surety to which it is attached."

NORTH AMERICAN SPECIALTY INSURANCE COMPANY CORPORATE SEAL 1973 NEW HAMPSHIRE

By _____
Steven P. Anderson, Senior Vice President of Washington International Insurance Company
& Senior Vice President of North American Specialty Insurance Company

By _____
David M. Layman, Vice President of Washington International Insurance Company
& Vice President of North American Specialty Insurance Company

WASHINGTON INTERNATIONAL INSURANCE COMPANY CORPORATE SEAL NEW HAMPSHIRE

IN WITNESS WHEREOF, North American Specialty Insurance Company and Washington International Insurance Company have caused their official seals to be hereunto affixed, and these presents to be signed by their authorized officers this 20th day of June, 2012.

North American Specialty Insurance Company
Washington International Insurance Company

State of Illinois
County of Cook ss:

On this 20th day of June, 2012, before me, a Notary Public personally appeared Steven P. Anderson, Senior Vice President of Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company and David M. Layman, Vice President of Washington International Insurance Company and Vice President of North American Specialty Insurance Company, personally known to me, who being by me duly sworn, acknowledged that they signed the above Power of Attorney as officers of and acknowledged said instrument to be the voluntary act and deed of their respective companies.

"OFFICIAL SEAL"
DONNA D. SKLENS
Notary Public, State of Illinois
My Commission Expires 10/06/2015

Donna D. Sklens, Notary Public

I, Jeffrey Goldberg, the duly elected Assistant Secretary of North American Specialty Insurance Company and Washington International Insurance Company, do hereby certify that the above and foregoing is a true and correct copy of a Power of Attorney given by said North American Specialty Insurance Company and Washington International Insurance Company, which is still in full force and effect.

IN WITNESS WHEREOF, I have set my hand and affixed the seals of the Companies this 21 day of May, 2014.

Jeffrey Goldberg, Vice President & Assistant Secretary of
Washington International Insurance Company & North American Specialty Insurance Company

CONTRACT
(SECTION 10)

This AGREEMENT made and entered into by and between the County of Cook, party of the first part and hereinafter called County, and Landmarks Contractors, Inc., party of the second part and hereinafter called Contractor.

WITNESSETH:

That for and in consideration of the payments to be made by the said County as hereinafter provided, the said Contractor hereby covenants and agrees with the said County to do all the work and furnish all the labor, materials, machinery, apparatus, implements, tools, and other things necessary for the improvement of a section of the public highway known as Cook County Contract # **1428-13237**, Federal Project No.:**TE-HPP-1375(002)** Federal Job No.:**C-91-288-13** known as **KEDZIE AVENUE – 139th Street to 135th Street** and **139th STREET – Kedzie Avenue to Utica Avenue**, in the Township of **Bremen**, County of Cook, and State of Illinois, said section known or to be known as Section: **13-W4612-07-LS**, Route **W46** at his own cost and expense, free from all liens, claims, and charges whatsoever, and in a good substantial, thorough and workmanlike manner, and in strict and full accordance, conformity and compliance with all the terms and conditions of this contract and the requirements under it of the Superintendent of Department of Transportation and Highways of Cook County, Illinois, and under the direction and to the satisfaction of the said Superintendent of Department of Transportation and Highways.

It is expressly understood and agreed by and between said County and said Contractor that the Bid hereto attached and Notice to Contractors, Specifications, Plans, Maps, Blue Prints, and Drawings, on file in the Office of the Superintendent of Department of Transportation and Highways of Cook County, Illinois, and in the office of the Department of Transportation, Springfield, Illinois, copies of which are hereto attached, hereby are included in and made a part of this contract.

The Contractor shall not begin construction operations until the contract has been approved by the Board of Cook County Commissioners and fully executed by the County. Subsequent to contract execution, the Contractor will be notified by a notice-to-proceed letter from the Superintendent of Cook County Department of Transportation of Highways to commence operations on a specified date. The undersigned agrees to start construction operations on the date so specified and to complete the proposed improvement in full compliance with the contract on June 25, 2014 thru June 24, 2015.

The Superintendent of Cook County Department of Transportation and Highways shall at the end of each month make an estimate in writing, such as in his opinion shall be just and fair, of the amount of materials furnished, delivered, properly set in place and incorporated into the herein described improvement, and the amount of work properly done by said Contractor in the performance of the work hereunder and the value thereof under and according to the terms of this contract.

The first estimate shall cover the amount of work performed and the value of the materials properly set in place and incorporated into the herein described improvement since said Contractor commenced the performance of this contract, and each subsequent estimate, except the final one, shall be of the amount of work performed and the value of the materials properly set in place and incorporated into said improvement since the last preceding estimate was made.

Such estimates of amount and quality shall not be required to be made by strict measurement, but shall be sufficient if they are made approximately only, and each such estimate shall be submitted to the Board of County Commissioners of Cook County and upon approval by said Board of Commissioners said County shall pay to said Contractor ninety per cent (90%) of the amount stated in said estimates.

At least one week before each payment falls due, said Contractor shall submit to said Superintendent of Department of Transportation and Highways requisition for such payment, and, shall, if required, submit therewith an itemized statement of the quantities and cost and proportionate profit of work performed to the termination of the period to be covered by such payment, together with an affidavit setting forth that the items in said statement are true and just, that the services were rendered, that the articles or materials were furnished, that the sum claimed is due and unpaid, after allowing all just credits, that all labor, materials, apparatus, fixtures, and machinery furnished or used have been paid for, and if not, stating those not paid for, giving the amount due, to whom due, and for what due, attaching to said affidavit waivers of lien from those mentioned in said exceptions as having unpaid claims, and such affidavit shall contain such other matter as may be deemed necessary by the said Superintendent of Department of Transportation and Highways to protect said County in its payments, and any such statement shall not be binding upon said Superintendent of Department of Transportation and Highways.

There shall be deducted from the amount so determined for the first fifty (50) percent of the completed work a sum of ten (10) percent to be retained until after the completion of the entire work to the satisfaction of the County. After fifty (50) percent or more of the work is completed, the County may, at its discretion, certify the remaining partial payments without any further retention, provided that satisfactory progress is being made, and provided that the amount retained is not less than five (5) percent of the total adjusted contract price.

It is expressly agreed by the parties hereto that in the event any defects or imperfections in the materials or workmanship to be furnished by the Contractor herein appear within the period of one year from the date of completion of all the work mentioned herein and the acceptance thereof by said County, the Contractor will, upon notice from the said Superintendent of Department of Transportation and Highways, (which notice may be given by letter mailed to said Contractor to the business address of the Contractor shown in the Proposal), repair and make good at his own cost any such defects or imperfections and replace any defective or imperfect materials or workmanship with other materials or workmanship satisfactory to said Superintendent of Department of Transportation and Highways, and furnish all such new materials and labor as may be necessary to do so; and in the event of the failure, refusal or delay of said Contractor to so make good, repair or replace said workmanship or materials, said County may do so or have same done by others, and said Contractor and the surety or sureties on his bond given for the

faithful performance of this contract shall be liable to the County of Cook for all damages and expense occasioned by such failure, refusal or delay.

It is expressly and mutually covenanted and agreed that all of the Plans and Specifications hereinbefore mentioned and this Instrument together are the documents forming the contract between said County and said Contractor and are correlative, and whatever may be provided for and required by one of said documents shall be as binding as if provided for and required by two or more of them.

The Contractor expressly agrees that not less than the general prevailing rate of wages as found by The Board of County Commissioners for the County of Cook in accordance with the provisions of "An Act regulating wages of laborers, mechanics and other workmen employed under contracts for public works", Approved June 26, 1941, as amended, or such wage rates as may be determined by the court on appeal as in said Act provided, shall be paid to all laborers, workmen and mechanics performing work under this contract. The prevailing wage rates as found by the said Board of County Commissioners are on file in the office of the County Clerk for the County of Cook.

It is expressly understood and agreed that if the said Contractor shall fail, refuse or neglect to comply with said contract and Plans and Specifications or any provisions therein contained, or to proceed according to the terms of said contract and Plans and Specifications or any part thereof, in the manner and at the time as directed by the said Superintendent of Department of Transportation and Highways, then the said County shall have the right, and The Board of County Commissioners of Cook County is hereby given authority on behalf of the said County to declare this contract forfeited, and the said County may re-bid the whole or any part thereof upon such terms as it may see fit without prejudice to any of its rights herein.

It is expressly understood and agreed by the parties hereto that the Superintendent of Department of Transportation and Highways shall fix and determine the amount of damages to be paid to said County by the said Contractor by reason of the failure or refusal to perform this contract or comply with the provisions thereof as aforesaid, and the said Contractor hereby agrees to be held liable for the amount so fixed and determined and agrees to pay such amount; and the said County shall apply in payment of any such amount so fixed and determined any and all sums on hand or due and owing to said Contractor, and if there be not sufficient money on hand or due and owing to said Contractor to balance and pay said amount so fixed and determined, then, in such case, any amount remaining unpaid shall be a valid and subsisting claim against the said Contractor and the surety or sureties on his bond given for the faithful performance of this agreement.

Contractor: LANDMARK CONTRACTORS, INC

KEDZIE AVENUE
139TH STREET TO 135TH STREET
13-W4612-07-LS

SCHEDULE OF PRICES

ITEM NO.	QUAN-TITIES	UNIT	PAY ITEM	UNIT COST	TOTAL COST
1	1,600	CU.YD.	EARTH EXCAVATION	$ 48.10	$ 76,960.00
2	1	L.SUM	RAILROAD PROTECTIVE LIABILITY INSURANCE	$ 9,161.10	$ 9,161.10
3	350	CU.YD	ROCK EXCAVATION FOR STRUCTURES	$ 552.35	$ 193,322.50
4	71	POUND	NITROGEN FERTILIZER NUTRIENT	$ 3.00	$ 213.00
5	71	POUND	PHOSPHORUS FERTILIZER NUTRIENT	$ 3.00	$ 213.00
6	71	POUND	POTASSIUM FERTILIZER NUTRIENT	$ 3.00	$ 213.00
7	5,334	SQ.YD.	SODDING, SALT TOLERANT	$ 17.00	$ 90,678.00
8	72	UNIT	SUPPLEMENTAL WATERING	$ 300.00	$ 21,600.00
9	5,334	SQ.YD.	TOPSOIL FURNISH AND PLACE, 4 IN	$ 6.75	$ 36,004.50
10	7	EACH	TREE PRUNING (OVER 10 IN DIA)	$ 135.00	$ 945.00
11	11	UNIT	TREE REMOVAL (6 TO 15 UNITS DIA)	$ 40.00	$ 440.00
12	77	UNIT	TREE REMOVAL (OVER 15 UNITS DIA)	$ 55.00	$ 4,235.00
13	5,334	SQ.YD.	EROSION CONTROL BLANKET	$ 1.50	$ 8,001.00
14	60	EACH	INLET FILTERS	$ 140.70	$ 8,442.00
15	400	FOOT	PERIMETER EROSION BARRIER	$ 5.00	$ 2,000.00
16	1	TON	AGGREGATE (PRIME COAT)	$ 20.00	$ 20.00
17	3,277	SQ.YD.	AGGREGATE BASE COURSE, TYPE B, 4 IN	$ 5.70	$ 18,678.90
18	200	SQ.YD.	AGGREGATE BASE COURSE, TYPE B, 8 IN	$ 9.65	$ 1,930.00
19	1	L.SUM	CRUSHED STONE (TEMPORARY USE)	$ 4,197.00	$ 4,197.00
20	47	SQ.YD.	SUBBASE GRANULAR MATERIAL, TYPE B, 6 IN	$ 15.00	$ 705.00
21	20	GAL.	BITUMINOUS MATERIALS (PRIME COAT)	$ 0.01	$ 0.20
22	337	FOOT	CUTTING HOT-MIX ASPHALT SURFACE (FULL DEPTH)	$ 3.00	$ 1,011.00
23	33	TON	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	$ 126.05	$ 4,159.65
24	47	SQ.YD.	HOT-MIX ASPHALT SHOULDERS, 6 IN	$ 122.90	$ 5,776.30
25	32	TON	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50	$ 131.05	$ 4,193.60
26	19	SQ.YD.	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 IN	$ 59.35	$ 1,127.65
27	25,099	SQ.FT.	PORTLAND CEMENT CONCRETE SIDEWALK, 5 IN	$ 4.90	$ 122,985.10
28	795	SQ.FT.	PORTLAND CEMENT CONCRETE SIDEWALK, 8 IN	$ 5.50	$ 4,372.50
29	637	FOOT	COMBINATION CURB AND GUTTER REMOVAL	$ 12.10	$ 7,707.70

Contractor: LANDMARK CONTRACTORS, INC

KEDZIE AVENUE
139TH STREET TO 135TH STREET
13-W4612-07-LS

SCHEDULE OF PRICES

ITEM NO.	QUAN-TITIES	UNIT	PAY ITEM	UNIT COST	TOTAL COST
30	1	CU.YD.	CONCRETE REMOVAL	$ 3,575.00	$ 3,575.00
31	250	SQ.YD.	DRIVEWAY PAVEMENT REMOVAL	$ 16.65	$ 4,162.50
32	336	SQ.FT.	MEDIAN REMOVAL	$ 2.50	$ 840.00
33	3,002	SQ.FT.	SIDEWALK REMOVAL	$ 2.35	$ 7,054.70
34	436	SQ.FT.	DETECTABLE WARNINGS	$ 20.15	$ 8,785.40
35	3	CU.YD.	CLASS SI CONCRETE (OUTLET)	$ 821.60	$ 2,464.80
36	36	FOOT	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12	$ 28.20	$ 1,015.20
37	601	FOOT	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24	$ 31.50	$ 18,931.50
38	607	FOOT	CONCRETE CURB, TYPE B	$ 25.45	$ 15,448.15
39	12	CAL.MO.	ENGINEERS FIELD OFFICE, TYPE A	$ 4,282.00	$ 51,384.00
40	60	FOOT	STORM SEWER REMOVAL, 12 IN	$ 23.80	$ 1,428.00
41	1	EACH	BLOCKING EXISTING DRAINS AND SEWERS (18 IN OR LESS)	$ 242.60	$ 242.60
42	84	FOOT	STORM SEWERS, TYPE 1 (RCCP CLASS III) 12 IN	$ 124.35	$ 10,445.40
43	12	EACH	CATCH BASINS TO BE ADJUSTED	$ 235.20	$ 2,822.40
44	8	EACH	CATCH BASINS, TYPE C, WITH FRAME AND GRATE	$ 2,946.50	$ 23,572.00
45	7	EACH	REMOVING CATCH BASINS	$ 478.90	$ 3,352.30
46	730	CU.YD.	NON-SPECIAL WASTE DISPOSAL	$ 83.90	$ 61,247.00
47	17	CU.YD.	TRENCH BACKFILL	$ 50.50	$ 858.50
48	12	EACH	CLEANING EXISTING CATCH BASINS	$ 250.00	$ 3,000.00
49	2	EACH	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION	$ 2,500.00	$ 5,000.00
50	1	L.SUM	TRAFFIC PROTECTION	$ 290,050.00	$ 290,050.00
51	2,500	FOOT	MODIFIED URETHANE PAVEMENT MARKING - LINE 12 IN	$ 4.50	$ 11,250.00
52	9	EACH	REMOVE SIGN PANEL ASSEMBLY, TYPE A	$ 125.00	$ 1,125.00
53	65	EACH	BREAKWAY DEVICE, TRANSFORMER BASE, 15 IN BOLT CIRCLE	$ 280.00	$ 18,200.00
54	2	EACH	ELECTRIC SERVICE INSTALLATION	$ 2,500.00	$ 5,000.00
55	1	L.SUM	ELECTRIC UTILITY SERVICE CONNECTION	$ 500.00	$ 500.00
56	4	EACH	JUNCTION BOX, STAINLESS STEEL, ATTACHED TO STRUCTURE, 8 IN X 8 IN X 6 IN	$ 850.00	$ 3,400.00
57	529	FOOT	LIGHT POLE FOUNDATION, 24 IN DIA	$ 210.00	$ 111,090.00
58	122	FOOT	LIGHT POLE FOUNDATION, 24 IN DIA, OFFSET	$ 250.00	$ 30,500.00

Contractor: LANDMARK CONTRACTORS, INC

KEDZIE AVENUE
139TH STREET TO 135TH STREET
13-W4612-07-LS

SCHEDULE OF PRICES

ITEM NO.	QUAN-TITIES	UNIT	PAY ITEM	UNIT COST	TOTAL COST
59	65	EACH	LIGHT POLE, ALUMINUM, 40 FT MH, 15 FT MAST ARM	$ 2,800.00	$ 182,000.00
60	2	EACH	LIGHTING CONTROLLER, BASE MOUNTED, 240 VOLT, 200 AMP	$ 12,500.00	$ 25,000.00
61	55	EACH	LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 250 WATT	$ 650.00	$ 35,750.00
62	10	EACH	LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 400 WATT	$ 650.00	$ 6,500.00
63	1	L.SUM	MAINTAIN EXISTING LIGHTING SYSTEM	$ 2,200.00	$ 2,200.00
64	2	EACH	REMOVAL OF DECORATIVE LIGHTING UNIT, SALVAGE	$ 350.00	$ 700.00
65	12	EACH	REMOVAL OF LIGHTING UNIT, SALVAGE	$ 320.00	$ 3,840.00
66	13	EACH	REMOVAL OF POLE FOUNDATION	$ 200.00	$ 2,600.00
67	300	FOOT	CONDUIT ATTACHED TO STRUCTURE, 1 1/2 IN DIA, GALVANIZED STEEL	$ 20.00	$ 6,000.00
68	2	EACH	REMOVAL OF LIGHTING CONTROLLER	$ 250.00	$ 500.00
69	120	FOOT	CONDUIT ENCASED IN 6 IN. CONCRETE	$ 50.00	$ 6,000.00
70	2	EACH	CONDUIT SPLICE	$ 450.00	$ 900.00
71	13,000	FOOT	UNDERGROUND CONDUIT, COILABLE NONMETALLIC CONDUIT, 1 1/2 IN DIA	$ 8.00	$ 104,000.00
72	200	FOOT	UNDERGROUND CONDUIT, COILABLE NONMETALLIC CONDUIT, 1 IN DIA	$ 7.50	$ 1,500.00
73	1,350	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 2 1/2 IN DIA	$ 25.00	$ 33,750.00
74	180	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 2 IN DIA	$ 20.00	$ 3,600.00
75	200	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 3 IN DIA	$ 28.00	$ 5,600.00
76	600	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 5 IN DIA	$ 50.00	$ 30,000.00
77	2	EACH	LIGHT POLE FOUNDATION, SPECIAL	$ 15,000.00	$ 30,000.00
78	25	EACH	PAVEMENT EXPLORATORY POTHOLE	$ 1,802.45	$ 45,061.25
79	2	EACH	REMOVAL OF LIGHTING CONTROLLER FOUNDATION	$ 200.00	$ 400.00
80	4	EACH	HANDHOLE	$ 1,850.00	$ 7,400.00
81	650	FOOT	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO 1/0	$ 4.00	$ 2,600.00
82	57,500	FOOT	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO 6	$ 1.20	$ 69,000.00
83	42,500	FOOT	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 8	$ 1.00	$ 42,500.00
84	3	EACH	REBUILD EXISTING HANDHOLE	$ 1,200.00	$ 3,600.00
85	2	EACH	REMOVAL OF ELECTRIC SERVICE INSTALLATION	$ 250.00	$ 500.00
86	1,600	FOOT	REMOVE ELECTRIC CABLE FROM CONDUIT	$ 0.50	$ 800.00
87	1	EACH	FILLING CATCH BASINS	$ 640.08	$ 640.08

Contractor: LANDMARK CONTRACTORS, INC

KEDZIE AVENUE
139TH STREET TO 135TH STREET
13-W4612-07-LS

SCHEDULE OF PRICES

ITEM NO.	QUAN-TITIES	UNIT	PAY ITEM	UNIT COST	TOTAL COST
88	32	EACH	TREE, AUTUMN BLAZE MAPLE (ACER X FREMANNII AUTUMN BLAZE), 2 1/2 IN CALIPER, BALLED AND	$ 675.00	$ 21,600.00
89	10	EACH	TREE, TILIA CORDATA (GREENSPIRE) 2 1/2 IN CALIPER, BALLED AND BURLAPPED	$ 575.00	$ 5,750.00
90	3	EACH	REMOVAL AND REPLACEMENT OF FIRE HYDRANT	$ 6,105.00	$ 18,315.00
91	2	EACH	WATER METER RELOCATION AND METER BOX REPLACEMENT	$ 3,350.00	$ 6,700.00
92	440	FOOT	THERMOPLASTIC PAVEMENT PAVEMENT MARKING - LINE 6 IN	$ 5.25	$ 2,310.00
93	90	FOOT	THERMOPLASTIC PAVEMENT PAVEMENT MARKING - LINE 24 IN	$ 21.00	$ 1,890.00
				TOTAL	$ 2,035,543.48

Kedzie Avenue - 139th Street to 135th Street and
139th Street - Kedzie Avenue to Utica Avenue

County of Cook
Department of Transportation and Highways

Proposal Bid Bond

Project TE-HPP-1375 (002)
Section 13-W4612-07-LS
Date March 26, 2014
Letting March 26, 2014

We Landmark Contractors, Inc. as Principal, and Washington International Insurance Company as Surety, are held and firmly bound unto the County of Cook a body politic and corporate of the state of Illinois herein after called the County in the penal sum of 5% of the total bid price, or for the amount specified in Article 102.09 of the "Standard Specifications for Road and Bridge Construction" in effect on the date of invitation for bids. We bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly to pay to the County this sum under the conditions of this instrument.

WHEREAS THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that, the said PRINCIPAL is submitting a written proposal to the County acting through its awarding agency for the construction of the work designated as the above section.

THEREFORE, if the proposal is accepted and a contract awarded to the PRINCIPAL by the County for the above-designated section, and the PRINCIPAL shall within fifteen (15) days after award enter into a formal contract, furnish surety guaranteeing the faithful performance of the work, and furnish the required insurance coverage, all as provided in the Standard Specifications for Road and Bridge Construction" and applicable Supplemental Specifications, then this obligation shall become void; otherwise it shall remain in full force and effect.

IN THE EVENT the County determines the PRINCIPAL has failed to enter into a formal contract in compliance with any requirements set forth in the preceding paragraph, then the County acting through its awarding agency shall immediately be entitled to recover the full penal sum set out above, together with all court costs, all attorney fees, and any other expense of recovery.

IN TESTIMONY WHEREOF, the said PRINCIPAL and said SURETY have caused this instrument to be signed by their respective officers and their corporate seals to be hereunto affixed this 26th day of March A.D. 20 14.

PRINCIPAL

Landmark Contractors, Inc.
(Company Name) (Seal)

BY: _____
(Signature & Title)

(Company Name) (Seal)

BY: _____
(Signature & Title)

(If PRINCIPAL is a joint venture of two or more contractors, the company names, seals and authorized signatures of each contractor must be affixed.)

SURETY

Washington International Insurance Company
(Name of Surety) (Seal)

BY: _____
(Signature of Attorney-in-fact)
Carol A. Dougherty

STATE OF ILLINOIS
COUNTY OF COOK

I, Barb Borchart, a Notary Public in and for Cook County, do hereby certify that Barry Borchart
(Insert names of individuals signing on behalf of PRINCIPAL & ~~SURETY~~)

Who are each personally known to me to be the same persons whose names are subscribed to the foregoing instrument on behalf of PRINCIPAL and ~~SURETY~~, appeared before me this day in person and acknowledged respectively, that they signed, sealed, and delivered said instrument as their free and voluntary act for the uses and purposes therein set forth.

Given under my hand and notarial seal this 26th day of March A.D., 20 14. My commission expires 8/18/14

Notary Public

*Improper execution of this form (i.e. Missing Signatures or Seals or incomplete certification) will result in bid being declared irregular.
** If Bid Bond is used in lieu of proposal guaranty check, it must be on this form and must be submitted with Bid.

(CC) K Proposal Bid Bond

OFFICIAL SEAL
B A BORCHART
NOTARY PUBLIC - STATE OF ILLINOIS
MY COMMISSION EXPIRES:08/18/14

Jan. 15, 2013
1 Page(s) Total

BID DEPOSIT FORM

AS REQUIRED BY INSTRUCTION TO BIDDER OF/AND INCONJUNCTION WITH THE BID HEREWITH SUBMITTED

(THIS FORM MUST BE SUBMITTED WITH THE BID)

TO: COOK COUNTY DEPARTMENT OF TRANSPORTATION AND HIGHWAYS

BID FOR: Kedzie Ave - 139th to 135th

139th - Kedzie Ave to Utica Ave

BID OPENING DATE: 3/26/14

We deposit (subject to all condition of said proposal) the following described deposit check:

( ) Cashier's Check ( ) Bank Draft (x) Bid Bond ( ) Other

Drawn on: Washington International Insurance Company **of** Itasca, IL

Bank **City** **State**

Draft or Check Number: Bid Bond **Date:** 3/26/14

Amount: $ 5% Bid Bond

Submitted by: Landmark Contractors, Inc

Bidder

11916 W. Main St.

Street Address

Huntley, IL 60142

City **State** **Zip Code**

DO NOT WRITE IN THE SPACES BELOW

The above described Deposit Check is:

( ) Held _____ **Date** _____
( ) Mailed _____ **Date** _____
( ) Delivered To _____ **Date** _____
( ) Bond Substituted _____ **Date** _____
( ) Bond Mailed To _____ **Date** _____

Surety Company Acknowledgement

STATE OF **ILLINOIS**
COUNTY OF **COOK** SS.:

On this 26th day of March, 2014, before me personally appeared **Carol A. Dougherty**, to me known, who, being by me duly sworn, did depose and say: that (s)he resides at **Palatine, Illinois**, that (s)he is the **Attorney in Fact** of **Washington International Insurance Company**, the corporation described in and which executed the annexed instrument; that (s)he knows the corporate seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by order of the Board of Directors of said corporation; that (s)he signed his/her name thereto by like order; and that the liabilities of said corporation do not exceed its assets as ascertained in the manner provided by law.

Sherene L. Hemler

Notary Public in and for the above County and State

My Commission Expires: 03/29/18

"OFFICIAL SEAL"
SHERENE L. HEMLER
Notary Public, State of Illinois
My Commission Expires 3/29/18

NAS SURETY GROUP

NORTH AMERICAN SPECIALTY INSURANCE COMPANY
WASHINGTON INTERNATIONAL INSURANCE COMPANY

GENERAL POWER OF ATTORNEY

KNOW ALL MEN BY THESE PRESENTS, THAT North American Specialty Insurance Company, a corporation duly organized and existing under laws of the State of New Hampshire, and having its principal office in the City of Manchester, New Hampshire, and Washington International Insurance Company, a corporation organized and existing under the laws of the State of New Hampshire and having its principal office in the City of Schaumburg, Illinois, each does hereby make, constitute and appoint:

J.S. POHL, ROBERT B. SCHUTZ, JAMES L. SULKOWSKI, CAROL A. DOUGHERTY,
ROBERT E. KAPPUS, SHERENE L. HEMLER and SARAH GREEN

JOINTLY OR SEVERALLY

Its true and lawful Attorney(s)-in-Fact, to make, execute, seal and deliver, for and on its behalf and as its act and deed, bonds or other writings obligatory in the nature of a bond on behalf of each of said Companies, as surety, on contracts of suretyship as are or may be required or permitted by law, regulation, contract or otherwise, provided that no bond or undertaking or contract or suretyship executed under this authority shall exceed the amount of:

FIFTY MILLION ($50,000,000.00) DOLLARS

This Power of Attorney is granted and is signed by facsimile under and by the authority of the following Resolutions adopted by the Boards of Directors of both North American Specialty Insurance Company and Washington International Insurance Company at meetings duly called and held on the 9th of May, 2012:

"RESOLVED, that any two of the Presidents, any Managing Director, any Senior Vice President, any Vice President, any Assistant Vice President, the Secretary or any Assistant Secretary be, and each or any of them hereby is authorized to execute a Power of Attorney qualifying the attorney named in the given Power of Attorney to execute on behalf of the Company bonds, undertakings and all contracts of surety, and that each or any of them hereby is authorized to attest to the execution of any such Power of Attorney and to attach therein the seal of the Company; and it is

FURTHER RESOLVED, that the signature of such officers and the seal of the Company may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, and any such Power of Attorney or certificate bearing such facsimile signatures or facsimile seal shall be binding upon the Company when so affixed and in the future with regard to any bond, undertaking or contract of surety to which it is attached."

NORTH AMERICAN SPECIALTY INSURANCE COMPANY CORPORATE SEAL 1973 NEW HAMPSHIRE

By _____
Steven P. Anderson, Senior Vice President of Washington International Insurance Company & Senior Vice President of North American Specialty Insurance Company

By _____
David M. Layman, Vice President of Washington International Insurance Company & Vice President of North American Specialty Insurance Company

WASHINGTON INTERNATIONAL INSURANCE COMPANY CORPORATE SEAL NEW HAMPSHIRE

IN WITNESS WHEREOF, North American Specialty Insurance Company and Washington International Insurance Company have caused their official seals to be hereunto affixed, and these presents to be signed by their authorized officers this 20th day of June, 2012.

North American Specialty Insurance Company
Washington International Insurance Company

State of Illinois
County of Cook ss:

On this 20th day of June, 2012, before me, a Notary Public personally appeared Steven P. Anderson, Senior Vice President of Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company and David M. Layman, Vice President of Washington International Insurance Company and Vice President of North American Specialty Insurance Company, personally known to me, who being by me duly sworn, acknowledged that they signed the above Power of Attorney as officers of and acknowledged said instrument to be the voluntary act and deed of their respective companies.

"OFFICIAL SEAL"
DONNA D. SKLENS
Notary Public, State of Illinois
My Commission Expires 10/06/2015

Donna D. Sklens, Notary Public

I, Jeffrey Goldberg, the duly elected Assistant Secretary of North American Specialty Insurance Company and Washington International Insurance Company, do hereby certify that the above and foregoing is a true and correct copy of a Power of Attorney given by said North American Specialty Insurance Company and Washington International Insurance Company, which is still in full force and effect.

IN WITNESS WHEREOF, I have set my hand and affixed the seals of the Companies this 26th day of March, 2014.

Jeffrey Goldberg, Vice President & Assistant Secretary of
Washington International Insurance Company & North American Specialty Insurance Company

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY): 5/21/2014

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
DSP Insurance Services
1900 E. Golf Road
Suite 650
Schaumburg IL 60173

CONTACT NAME: J Stephen Pohl
PHONE (A/C, No, Ext): (847) 934-6100 FAX (A/C, No): (847) 934-6186
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A: Illinois National Insurance Co	23817
INSURER B: Navigators Insurance Co	
INSURER C: Westfield Insurance Group	24112
INSURER D: Greenwich Insurance Co.	22322
INSURER E:	
INSURER F:	

INSURED (847) 669-5474
Landmark Contractors, Inc.
P.O. Box 1104
Huntley IL 60142

COVERAGES **CERTIFICATE NUMBER:** Cert ID 14529 **REVISION NUMBER:**

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
C	GENERAL LIABILITY X COMMERCIAL GENERAL LIABILITY CLAIMS-MADE X OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: POLICY X PRO-JECT LOC			CMM0373007	4/30/2014	4/30/2015	EACH OCCURRENCE	$ 1,000,000
							DAMAGE TO RENTED PREMISES (Ea occurrence)	$ 500,000
							MED EXP (Any one person)	$ 5,000
							PERSONAL & ADV INJURY	$ 1,000,000
							GENERAL AGGREGATE	$ 2,000,000
							PRODUCTS - COMP/OP AGG	$ 2,000,000
								$
A	AUTOMOBILE LIABILITY X ANY AUTO ALL OWNED AUTOS SCHEDULED AUTOS X HIRED AUTOS X NON-OWNED AUTOS			3275163	4/30/2014	4/30/2015	COMBINED SINGLE LIMIT (Ea accident)	$ 1,000,000
							BODILY INJURY (Per person)	$
							BODILY INJURY (Per accident)	$
							PROPERTY DAMAGE (Per accident)	$
								$
B	X UMBRELLA LIAB X OCCUR EXCESS LIAB CLAIMS-MADE DED X RETENTION $ 10,000			CH14EXC782141IV	4/30/2014	4/30/2015	EACH OCCURRENCE	$ 10,000,000
							AGGREGATE	$ 10,000,000
								$
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? Y/N N (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	N/A		48250421	4/30/2014	4/30/2015	X WC STATU-TORY LIMITS OTH-ER	
							E.L. EACH ACCIDENT	$ 1,000,000
							E.L. DISEASE - EA EMPLOYEE	$ 1,000,000
							E.L. DISEASE - POLICY LIMIT	$ 1,000,000
C	EQUIPMENT			CMM0373007	4/30/2014	4/30/2015	Leased/Rented	$ 300,000
D	POLLUTION LIABILITY			CPL03251435142	5/20/2014	5/20/2015	Each Claim / Aggregate	$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)
CONTRACT #1428-13237: KEDZIE AVENUE - 139th STREET TO 135th STREET

ADDITIONAL INSURED ON A PRIMARY AND NON-CONTRIBUTORY BASIS WITH RESPECTS TO GENERAL LIABILITY, AUTOMOBILE LIABILITY AND UMBRELLA LIABILITY WHEN REQUIRED BY WRITTEN CONTRACT: Cook County, its officials and employees

***WAIVER OF SUBROGATION APPLIES TO WORKERS COMPENSATION, GENERAL LIABILITY, AUTOMOBILE LIABILITY AND UMBRELLA LIABILITY WHEN REQUIRED BY WRITTEN CONTRACT IN FAVOR OF THE ABOVE REFERENCED ADDITIONAL INSURED

CERTIFICATE HOLDER

COOK COUNTY
DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
69 W. WASHINGTON ST.
23rd FLOOR
CHICAGO IL 60502-3007

OK Pow

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

© 1988-2010 ACORD CORPORATION. All rights reserved.

ACORD 25 (2010/05) The ACORD name and logo are registered marks of ACORD

ACORD®

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 5/21/2014

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
DSP Insurance Services
1900 E. Golf Road
Suite 650
Schaumburg IL 60173

CONTACT NAME: J Stephen Pohl
PHONE (A/C, No, Ext): (847) 934-6100 FAX (A/C, No): (847) 934-6186
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A: Travelers Indemnity Company	25658
INSURER B:	
INSURER C:	
INSURER D:	
INSURER E:	
INSURER F:	

INSURED
METRA
547 W. Jackson Blvd.
Chicago IL 60661

COVERAGES CERTIFICATE NUMBER: Cert ID 14528 REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
	COMMERCIAL GENERAL LIABILITY						EACH OCCURRENCE	$
	CLAIMS-MADE / OCCUR						DAMAGE TO RENTED PREMISES (Ea occurrence)	$
							MED EXP (Any one person)	$
							PERSONAL & ADV INJURY	$
	GEN'L AGGREGATE LIMIT APPLIES PER:						GENERAL AGGREGATE	$
	POLICY / PRO-JECT / LOC						PRODUCTS - COMP/OP AGG	$
	OTHER:							$
	AUTOMOBILE LIABILITY						COMBINED SINGLE LIMIT (Ea accident)	$
	ANY AUTO						BODILY INJURY (Per person)	$
	ALL OWNED AUTOS / SCHEDULED AUTOS						BODILY INJURY (Per accident)	$
	HIRED AUTOS / NON-OWNED AUTOS						PROPERTY DAMAGE (Per accident)	$
								$
	UMBRELLA LIAB / OCCUR						EACH OCCURRENCE	$
	EXCESS LIAB / CLAIMS-MADE						AGGREGATE	$
	DED / RETENTION $							$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY						PER STATUTE / OTH-ER	
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) Y/N	N/A					E.L. EACH ACCIDENT	$
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - EA EMPLOYEE	$
							E.L. DISEASE - POLICY LIMIT	$
A	RAILROAD PROTECTIVE LIABILITY			SPS-9D932846-IND	5/20/2014	5/20/2015	Each Occurrence	5,000,000
							Aggregate	10,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
CONTRACT #1428-13237: KEDZIE AVENUE - 139th STREET TO 135th STREET

CERTIFICATE HOLDER

COOK COUNTY
DEPARTMENT OF TRANSPORTATION AND HIGHWAYS
69 W. WASHINGTON ST.
23rd FLOOR
CHICAGO IL 60502-3007

OK TBD

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

© 1988-2014 ACORD CORPORATION. All rights reserved.

The ACORD name and logo are registered marks of ACORD

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - OWNERS, LESSEES OR CONTRACTORS - COMPLETED OPERATIONS

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART

SCHEDULE

Name of Person or Organization: SEE BELOW
Location And Description of Completed Operations: ANY PERSONS OR ORGANIZATIONS WHOM YOU HAVE AGREED IN WRITING IN A CONTRACT OR AGREEMENT THAT SUCH PERSONS OR ORGANIZATIONS BE ADDED AS ADDITIONAL INSURED.
Additional Premium:

(If no entry appears above, information required to complete this endorsement will be shown in the Declarations as applicable to this endorsement.)

Section II - Who Is An Insured is amended to include as an insured the person or organization shown in the Schedule, but only with respect to liability arising out of "your work" at the location designated and described in the schedule of this endorsement performed for that insured and included in the "products-completed operations hazard".

© ISO Properties, Inc., 2000

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

COMMERCIAL GENERAL LIABILITY CONTRACTORS ENDORSEMENT

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE FORM

Coverage afforded under this expanded coverage endorsement does not apply to any person or organization covered as an additional insured on any other endorsement now or hereafter attached to this Coverage Form.

SCHEDULE

The coverage provided by this endorsement is summarized below and is intended to provide a general coverage description only. For the details effecting each coverage please refer to the terms and conditions in this endorsement.

A. Expected or Intended Injury
- Reasonable force

B. Liquor Liability Coverage Extension

C. Non-Owned Watercraft
- Increased to 60 feet

D. Non-Owned Aircraft

E. Damage To Property - Borrowed Equipment

F. Damage To Premises Rented To You

G. Personal And Advertising Injury
- Contractual Personal and Advertising Injury
- Exclusions

H. Supplementary Payments
- Bail Bonds - $2,500
- Loss of Earnings - $1,000

I. Additional Insureds - Automatic Status
- State or Governmental Agency or Subdivision or Political Subdivision Controling Interest
- Managers or Lessors of Premises
- Mortgagee, Assignee or Receiver
- Owners or Other Interests From Whom Land Has Been Leased
- Co-Owners of Insured Premises
- Lessor of Leased Equipment

J. Who Is An Insured broadened
- Joint Ventures / Partnership / Limited Liability Company
- Health Care Professionals (Incidental Medical Malpractice)
- Individual Owners of Building are Insured's
- Newly Formed or Acquired Entities

K. Knowledge and Notice of Occurrence

L. Other Insurance Condition Amended

M. Unintentional Failure To Disclose Hazards

N. Waiver of Transfer Of Rights Of Recovery Against Others To Us - Automatic Status

O. Liberalization

P. Definitions
- Bodily Injury redefined
- Insured Contract redefined
- Expanded Personal and Advertising Injury definition

A. EXPECTED OR INTENDED INJURY

Under **SECTION 1, COVERAGES, COVERAGE A. BODILY INJURY AND PROPERTY DAMAGE** exclusion a. is replaced with the following:

a. Expected Or Intended Injury

"Bodily injury" or "property damage" expected or intended from the standpoint of the insured. This exclusion does not apply to "bodily injury" or "property damage" resulting from the use of reasonable force for the purpose of protecting persons or property.

B. **LIQUOR LIABILITY COVERAGE EXTENSION**

SECTION 1, COVERAGES, COVERAGE A BODILY INJURY AND PROPERTY DAMAGE LIABILITY, Item **2. Exclusions c. Liquor Liability** is deleted.

C. **NON-OWNED WATERCRAFT**

Under **SECTION 1, COVERAGES, COVERAGE A BODILY INJURY AND PROPERTY DAMAGE LIABILITY,** Item **2. Exclusions g.2(a)** is replaced with the following:

(a) Less than 60 feet long; and

D. **NON-OWNED AIRCRAFT**

Under **SECTION 1, COVERAGES, COVERAGE A BODILY INJURY AND PROPERTY DAMAGE LIABILITY,** Item **2. Exclusions g. Aircraft, Auto or Watercraft,** the following is added:

(6) An aircraft you do not own provided that:

(a) The pilot in command holds a currently effective certificate issued by the duly constituted authority of the United States of America or Canada, designating that person as a commercial or airline transport pilot;

(b) It is rented with a trained, paid crew; and

(c) It does not transport persons or cargo for a charge.

E. **DAMAGE TO PROPERTY - BORROWED EQUIPMENT**

Under **SECTION 1, COVERAGES, COVERAGE A BODILY INJURY AND PROPERTY DAMAGE LIABILITY,** Item **2. Exclusions j.** is deleted and replaced by the following:

j. **Damage To Property:**

(1) Property you own, rent or occupy;

(2) Premises you sell, give away or abandon, if the "property damage" arises out of any part of those premises;

(3) Property loaned to you;

(4) Personal property in the care, custody or control of the insured;

(5) That particular part of any real property on which you or any contractors or subcontractors working directly or indirectly on your behalf are performing operations, if the "property damage" arises out of those operations; or

(6) That particular part of any real property that must be restored, replaced, or repaired because "your work" was incorrectly performed on it.

Paragraphs **(1), (3)** and **(4)** of this exclusion do not apply to:

(i) "property damage" to tools or equipment loaned to you if the tools or equipment are not being used to perform operations at the time of loss; or

(ii) "property damage" (other than damage by fire) to premises rented to you or temporarily occupied to you with the permission of the owner or to the contents of premises rented to you for a period of seven (7) or fewer consecutive days. A separate limit of insurance applies to Damage To Premises Rented To You as described in **Section III - Limits Of Insurance.**

Paragraph **(2)** of this exclusion does not apply if the premises are "your work" and were not occupied, rented or held for rental by you beyond one year from the date "your work" was completed.

Paragraph **(2)** of this exclusion does not apply if the premises are "your work" and were never occupied, rented or held for rental by you.

Paragraphs **(3), (4), (5)** and **(6)** of this exclusion do not apply to liability assumed under a sidetrack agreement.

Paragraph **(6)** of this exclusion does not apply to "property damage" included in the "products-completed operations hazard."

F. **DAMAGE TO PREMISES RENTED TO YOU**

Under **SECTION I - COVERAGES, COVERAGE A BODILY INJURY AND PROPERTY DAMAGE LIABILITY,** Item **2. Exclusions,** the last paragraph of Item **2. Exclusions** is replaced with the following:

Exclusion **c.** through **n.** do not apply to damage by fire or explosion to premises while rented to you or temporarily occupied by you with permission of the owner. A separate limit of insurance applies to this coverage as described in **Section III - LIMITS OF INSURANCE.**

G. **PERSONAL AND ADVERTISING INJURY**

Under **SECTION 1, COVERAGES, COVERAGE B PERSONAL AND ADVERTISING INJURY LIABILITY**, item **2. Exclusions e. Contractual Liability** is deleted.

Under **SECTION I - COVERAGES, COVERAGE B PERSONAL AND ADVERTISING INJURY LIABILITY**, the following are added to item **2. Exclusions:**

q. **Discrimination Relating To Room, Dwelling or Premises**

Caused by discrimination directly or indirectly related to the sale, rental, lease or sub-lease or prospective sale, rental, lease or sub-lease of any room, dwelling or premises by or at the direction of any insured.

r. **Fines or Penalties**

Fines or penalties levied or imposed by a governmental entity because of discrimination.

H. **SUPPLEMENTARY PAYMENTS**

Under **SECTION I - SUPPLEMENTARY PAYMENTS COVERAGES A AND B**, item **1.b.** is replaced with the following:

b. Up to $2,500 for cost of bail bonds required because of accidents or traffic law violations arising out of the use of any vehicle to which the "Bodily Injury" Liability Coverage applies. We do not have to furnish these bonds.

Under **SECTION I - SUPPLEMENTARY PAYMENTS COVERAGES A AND B**, item **1.d.** is replaced with the following:

d. All reasonable expenses incurred by the insured at our request to assist us in the investigation or defense of the claim or "suit", including actual loss of earnings up to $1,000 a day because of time off from work.

I. **ADDITIONAL INSUREDS - AUTOMATIC STATUS**

SECTION II - WHO IS AN INSURED is amended to include as an insured any person or organization (called additional insured) described in paragraphs **a.** through **g.** below whom you are required to add as an additional insured on this policy under a written contract or written agreement. However the written contract or written agreement must be:

1. Currently in effect or becoming effective during the term of the policy; and

2. Executed prior to the "bodily injury", "property damage" or "personal injury and advertising injury", but

Only the following persons or organizations are additional insureds under this endorsement and coverage provided to such additional insureds is limited as provided herein:

a. **State or Governmental Agency or Subdivision or Political Subdivisions**

A state or governmental agency or subdivision or political subdivision subject to the following provisions:

(1) This insurance applies only with respect to the following hazards for which the state or governmental agency or subdivision or political subdivision has issued a permit or authorization in connection with premises you own, rent or control and to which this insurance applies;

(a) The existence, repair maintenance, erection, construction, or removal of advertising signs, awnings canopies, cellar entrances, coal holes, driveways, manholes, marquees, hoist away openings, sidewalk vaults, street banners, or decorations and similar exposures; or

(b) The construction, erection, or removal of elevators.

(2) This insurance applies only with respect to operations performed by you or on your behalf for which the state or governmental agency or subdivision or political subdivision has issued a permit or authorization.

This insurance does not apply to "bodily injury", "property damage" or "personal and advertising injury" arising out of operations performed for the federal government, state or municipality.

b. **Managers or Lessors of Premises**

A manager or lessor of premises but only with respect to liability arising out of the ownership, maintenance or use of that specific part of the premises leased to you and subject to the following additional exclusions:

This insurance does not apply to:

(1) Any "occurrence" which takes place after you cease to be a tenant in that premises; or

(2) Structural alterations, new construction or demolition operations performed by or on behalf of such additional insured.

c. **Mortgagee, Assignee or Receiver**

A mortgagee, assignee or receiver but only with respect to their liability as mortgagee, assignee or receiver and arising out of the ownership, maintenance, or use of a premises by you.

This insurance does not apply to structural alterations, new construction or demolition operations performed by or for such additional insured.

d. **Owners Or Other Interests From Whom Land Has Been Leased**

An owner or other interest from who land has been leased by you but only with respect to liability arising out of the ownership, maintenance or use of that specific part of the land leased to you and subject to the following additional exclusions:

This insurance does not apply to:

(1) Any "occurrence" which takes place after you cease to lease that land; or

(2) Structural alterations, new construction or demolition operations performed by or on behalf of such additional insured.

e. **Co-owner of Insured Premises**

A co-owner of a premises co-owned by you and covered under this insurance but only with respect to the co-owners liability as co-owner of such premises.

f. **Lessor of Equipment**

Any person or organization from whom you lease equipment. Such person or organization are insureds only with respect to their liability arising out of the maintenance, operation or use by you of equipment leased to you by such person or organization.

A person's or organization's status as an insured under this endorsement ends when their written contract or written agreement with you for such leased equipment ends.

With respect to the insurance afforded these additional insureds, the following exclusions apply:

This insurance does not apply:

(1) To any "occurrence" which takes place after the equipment lease expires; or

(2) To "bodily injury", "property damage", or "personal and advertising injury" arising out of the sole negligence of such additional insured.

Any insurance provided to an additional insured designated under paragraphs **a.** through **f.** above does not apply to "bodily injury" or "property damage" included within the "products-completed operations hazard".

As respects the coverage provided under this provision, Paragraph **4.b.(1)** of **Section IV - Commercial General Liability Conditions** is deleted and replaced with the following:

4. **Other Insurance**

b. **Excess Insurance**

(1) This insurance is excess over:

Any other insurance naming the additional insured as an insured whether primary, excess, contingent or on any other basis unless a written contract or written agreement specifically requires that this insurance be either primary or primary and non-contributing. Where required by written contractor written agreement, we will consider any other insurance maintained by the additional insured for injury or damage covered by this endorsement to be excess and non-contributing with this insurance.

J. **WHO IS AN INSURED BROADENED**

Under **SECTION II - WHO IS AN INSURED** the following is added to item 1:

f. **Joint Ventures / Partnership / Limited Liability Company Coverage**

You are an insured when you had an interest in a joint venture, partnership or limited liability company which is terminated or ended prior to or during this policy period but only to the extent of your interest in such joint venture, partnership or limited liability company. This coverage does not apply:

(1) Prior to the termination date of any joint venture, limited liability company or partnership; or

(2) If there is other valid and collectible insurance purchased specifically to insure the joint venture, legal liability company or partnership.

Under **SECTION II - WHO IS AN INSURED, 2.a.(1)(d)** is deleted and replaced with the following:

(d) Arising out of his or her providing or failing to provide professional health care services.

This does not apply to nurses, emergency medical technicians or paramedics employed by you to provide health care services, but only if you are not in the business or occupation of providing such professional services.

Under **SECTION II - WHO IS AN INSURED** the following is added:

4. For **COVERAGE A** and **COVERAGE B** only, the owner of any building leased to you, but only if the building owner is a shareholder in your corporation or a partner in your partnership insured by this policy, and only with respect to liability arising out of the ownership, maintenance or use of that part of the premises leased to you. However, this insurance does not apply:

   a. To any "occurrence" or offense which takes place after you cease to be a tenant in the premises; or

   b. To structural alterations, new construction or demolition operations performed by or on behalf of the building owner.

Under **SECTION II - WHO IS AN INSURED, 3.a.** is deleted and replaced with the following:

a. Coverage under this provision is afforded only until the end of the policy period or the next anniversary of this policy's effective date after you acquire or form the organization whichever is earlier.

Under **SECTION II - WHO IS AN INSURED** the last paragraph in this section is deleted and replaced with the following:

Except as provided in **3.** above, no person or organization is an insured with respect to the conduct of any current or past joint venture, limited liability company or partnership that is not shown as a named insured in the Declarations.

K. KNOWLEDGE AND NOTICE OF OCCURRENCE

Under **SECTION IV - COMMERCIAL GENERAL LIABILITY CONDITIONS, 2. Duties in the Event of Occurrence, Offense, Claim Or Suit,** the following is added:

e. The requirement in Condition **2.a.** applies only when the "occurrence" or offense is known to:

   (1) You, if you are an individual;

   (2) A partner, if you are a partnership;

   (3) An "executive officer" or insurance manager, if you are a corporation; or

   (4) A manager, if you are a limited liability company.

f. The requirement in Condition **2.b.** will not be breached unless the breach occurs after such claim or "suit" is known to:

   (1) You, if you are an individual;

   (2) A partner, if you are a partnership;

   (3) An "executive officer" or insurance manager, if you are a corporation; or

   (4) A manager, if you are a limited liability company.

g. Your rights under this Coverage Part will not be prejudiced if you fail to give us notice of an "occurrence," offense, claim, or "suit" and that failure is solely due to your reasonable belief that the "bodily injury" or "property damage" is not covered under this Coverage Part. However, you shall give written notice of this "occurrence," offense, claim, or "suit" to us as soon as you are aware this insurance may apply to such "occurrence," offense, claim or "suit."

L. OTHER INSURANCE CONDITION AMENDED

When required by written contract with any additional insured owner, lessee, or contractor to provide insurance on a primary and noncontributory basis, **Condition 4** of **Section IV - Commercial General Liability Conditions** is deleted and replaced by the following:

4. Other Insurance

If other valid and collectible insurance is available for a loss we cover under Coverage A or B of this Coverage Part, our obligations are limited as follows:

a. **Primary Insurance**

This insurance is primary and non-contributory except when **b.** below applies.

b. **Excess Insurance**

This insurance is excess over any of the other insurance, whether primary, excess, contingent, or on any other basis:

(1) That is Fire, Extended Coverage, Builders Risk, Installation Risk, or similar coverage for your work;

(2) That is Fire insurance for premises rented to you or temporarily occupied by you with permission of the owner; or

(3) If the loss arises out of the maintenance or use of aircraft, "autos," or watercraft to the extent not subject to Exclusion **g.** of **Section I** - Coverage **A.**

(4) If the loss is caused by the sole negligence of any additional insured, owner, lessee, or contractor.

When this insurance is excess, we will have no duty under Coverage **A** or **B** to defend the insured against any "suit" if any other insurer has a duty to defend the insured against that "suit." If no other defends, we will undertake to do so, but we will be entitled to the other insurer's rights against all those other insurers.

When this insurance is excess over other insurance, we will pay only our share of the amount of loss, if any, that exceeds the sum of:

(1) The total amount that all such other insurance would pay for the loss in the absence of this insurance; and

(2) The total of all deductible and self-insured amounts under all that other insurance.

We will share the remaining loss, if any with any other insurance that is not described in this Excess Insurance provision and was not bought specifically to apply in excess of the limits of insurance shown in the declarations of this Coverage Part.

M. UNINTENTIONAL FAILURE TO DISCLOSE HAZARDS

Under **SECTION IV - COMMERCIAL GENERAL LIABILITY CONDITIONS,** item **6. Representations,** the following is added:

d. Your failure to disclose all hazards or prior "occurrences" existing as of the inception date of this policy shall not prejudice the coverage afforded by this policy, provided such failure to disclose all hazards or prior "occurrences" is not intentional.

N. WAIVER OF TRANSFER OF RIGHTS OF RECOVERY AGAINST OTHERS TO US - AUTOMATIC STATUS

Under **SECTION IV - COMMERCIAL GENERAL LIABILITY CONDITIONS,** item **8. Transfer Of Rights Of Recovery Against Others To Us** is deleted and replaced by the following:

We waive any right of recovery we may have against any person or organization with respect to which the insured has waived its right of recovery.

It is further agreed that work commenced under letter of intent or work order, subject to subsequent reduction to writing, with customers whose customary written contracts would require a waiver of recovery rights against them also falls within this blanket waiver of recovery rights.

O. LIBERALIZATION

If we adopt a change in our forms or rules which would broaden coverage for contractors under this coverage form without an additional premium charge, your policy will automatically provide the additional coverage's as of the date the broadened coverage is effective in your state.

P. DEFINITIONS

Under **SECTION V - DEFINITIONS,** item 3. is deleted and replaced with the following:

3. "Bodily injury" means bodily injury, disability, sickness, or disease sustained by a person, including death resulting from any of these at any time. "Bodily injury" includes mental anguish or other mental injury resulting from "bodily injury".

Under **SECTION V - DEFINITIONS,** item **9.** is deleted and replaced with the following:

9. "Insured Contract" means:

a. A contract for a lease of premises. However, that portion of the contract for a lease of premises that indemnifies any person or organization for damage by fire to premises while rented to you or temporarily occupied by you with permission of the owner is not an "insured contract";

b. A sidetrack agreement;

c. Any easement or license agreement;

d. An obligation, as required by ordinance, to indemnify a municipality, except in connection with work for a municipality;

e. An elevator maintenance agreement;

f. That part of any other contract or agreement pertaining to your business (including an indemnification of a municipality in connection with work performed for a municipality) under which you assume the tort liability of another party to pay for "bodily injury" or "property damage" to a third person or organization.

Tort liability means a liability that would be imposed by law in the absence of any contract or agreement.

Paragraph f. does not include that part of any contract or agreement:

(1) That indemnifies an architect, engineer, or survey or for injury or damage arising out of:

(a) Preparing, approving or failing to prepare or approve, maps, shop drawings, opinions, reports, surveys, field orders, change orders or drawings and specifications; or

(b) Giving directions or instructions, or failing to give them, if that is the primary cause of the injury or damage; or

(2) Under which the insured if an architect, engineer or surveyor, assumes liability for an injury or damage arising out of the insured s rendering or failure to render professional services including those listed in (1) above and supervisory, inspection, architectural or engineering, activities.

Under **SECTION V - DEFINITIONS,** item 14. the following is added to the definition of "Personal and advertising injury":

h. Discrimination or humiliation that results in injury to the feelings or reputation of a natural person, but only if such discrimination or humiliation is:

(1) Not done intentionally by or at the direction of:

(a) The insured; or

(b) Any "executive officer", director, stockholder, partner, member or manager (if you are a limited liability company) of the insured;

(2) Not directly or indirectly related to the employment, prospective employment, past employment or termination of employment of any person or persons by any insured.

POLICY NUMBER: CMM0373007 COMMERCIAL GENERAL LIABILITY

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - OWNERS, LESSEES OR CONTRACTORS - SCHEDULED PERSON OR ORGANIZATION

This endorsement modifies insurance provided under the following:
COMMERCIAL GENERAL LIABILITY COVERAGE PART

SCHEDULE

Name of Person or Organization:
ANY PERSONS OR ORGANIZATIONS WHOM YOU HAVE AGREED IN WRITING IN A CONTRACT OR AGREEMENT THAT SUCH PERSONS OR ORGANIZATIONS BE ADDED AS ADDITIONAL INSURED.

(If no entry appears above, information required to complete this endorsement will be shown in the Declarations as applicable to this endorsement.)

A. **Section II - Who Is An Insured** is amended include as an insured the person or organization shown in the Schedule, but only with respect to liability arising out of your ongoing operations performed for that insured.

B. With respect to the insurance afforded to these additional insureds, the following exclusion is added:

2. Exclusions

This exclusion does not apply to "bodily injury" or "property damage" occurring after:

(1) All work, including materials, parts or equipment furnished in connection with such work, on the project (other than service, maintenance or repairs) to be performed by or on behalf of the additional insured(s) at the site of the covered operations has been completed; or

(2) That portion of "your work" out of which the injury or damage arises has been put to its intended use by any person or organization other than another contractor or subcontractor engaged in performing operations for a principal as part of the same project.

Copyright, Insurance Services Office, Inc., 2000

TRAVELERS

Report Claims Immediately by Calling*
1-877-828-4132
Speak directly with a claim professional
24 hours a day, 365 days a year

*Unless Your Policy Requires **Written** Notice or Reporting

COMMERCIAL INSURANCE

A Custom Insurance Policy Prepared for:

THE COMMUTER RAIL DIVISION OF
THE REGIONAL TRANSPORTATION
547 WEST JACKSON BLVD
CHICAGO IL 60661

Presented by: DS&P INSURANCE SERVICES

003047

OK Ted

TRAVELERS

One Tower Square, Hartford, Connecticut 06183

TRAVELERS CORP. TEL: 1-800-328-2189
CONTRACTORS
COMMON POLICY DECLARATIONS
ISSUE DATE: 06/02/14
POLICY NUMBER: DT-SPS-9D932846-IND-14

INSURING COMPANY:
THE TRAVELERS INDEMNITY COMPANY

1. NAMED INSURED AND MAILING ADDRESS:
   THE COMMUTER RAIL DIVISION OF
   THE REGIONAL TRANSPORTATION (AS PER IL T8 00)
   547 WEST JACKSON BLVD
   CHICAGO, IL 60661

2. POLICY PERIOD: From 05/20/14 to 05/20/15 12:01 A.M. Standard Time at your mailing address.

3. LOCATIONS

Premises Loc. No.	Bldg. No.	Occupancy	Address

ON FILE WITH COMPANY

4. COVERAGE PARTS FORMING PART OF THIS POLICY AND INSURING COMPANIES:
   RAILROAD PROTECTIVE LIABILITY COV PART DECLARATIONS CG TO 05 04 07 IND

5. NUMBERS OF FORMS AND ENDORSEMENTS FORMING A PART OF THIS POLICY: SEE IL T8 01 10 93

6. SUPPLEMENTAL POLICIES: Each of the following is a separate policy containing its complete provisions:

Policy	Policy No.	Insuring Company

7. PREMIUM SUMMARY:

Provisional Premium	$ 5,000
Due at Inception	$ 5,000
Due at Each	$

NAME AND ADDRESS OF AGENT OR BROKER:
DS&P INSURANCE SERVICES (HG556)
1900 E GOLF RD STE 650
SCHAUMBURG, IL 60173

COUNTERSIGNED BY:

Authorized Representative

DATE:

IL TO 02 11 89(REV. 09-07) PAGE 1 OF 1
OFFICE: EDISON

003048

OK Tod

TRAVELERS

POLICY NUMBER: DT-SPS-9D932846-IND-14
EFFECTIVE DATE: 05-20-14
ISSUE DATE: 06-02-14

LISTING OF FORMS, ENDORSEMENTS AND SCHEDULE NUMBERS

THIS LISTING SHOWS THE NUMBER OF FORMS, SCHEDULES AND ENDORSEMENTS BY LINE OF BUSINESS.

IL T0 02 11 89	COMMON POLICY DECLARATIONS
IL T8 01 10 93	FORMS, ENDORSEMENTS AND SCHEDULE NUMBERS
IL T3 83 09 06	EXECUTION CLAUSE
IL T8 00	NAMED INSURED ENDORSEMENT

COMMERCIAL GENERAL LIABILITY

CG T0 05 04 07	RAILROAD PROTECTIVE LIAB COV PART DEC
CG T0 07 03 95	DECLARATIONS PREMIUM SCHEDULE
CG T0 08 11 03	KEY TO DECLARATIONS PREMIUM SCHEDULE
CG T0 40 11 03	TABLE OF CONTENTS
CG 00 35 10 01	RAILROAD PROTECTIVE LIAB COV FORM
CG 21 70 01 08	CAP ON LOSSES-CERTIFIED ACTS-TERRORISM
CG D3 58 03 05	EXCLUSION - SILICA
CG D0 76 06 93	EXCLUSION-LEAD
CG T4 78 02 90	EXCLUSION-ASBESTOS
CG 29 06 07 05	IL CHANGES-CANCELLATION AND NONRENEWAL
CG 00 64 12 02	WAR LIABILITY EXCLUSION

INTERLINE ENDORSEMENTS

IL T3 68 05 10	FEDERAL TERRORISM RISK INS ACT DISCLOSE
IL 00 21 09 08	NUCLEAR ENERGY LIAB EXCL END-BROAD FORM
IL 01 62 09 08	ILLINOIS CHANGES - DEFENSE COSTS

003049

This policy consists of this policy cover, the Declarations and the forms, schedules and endorsements listed in the Declarations.

In return for payment of the premium, we agree with the Named Insured to provide the insurance afforded by this policy. That insurance will be provided by the company indicated as insuring company in the Declarations by the abbreviation of its name.

The companies listed below (each a stock company) have executed this policy, but it is valid only if countersigned on the Declarations by our authorized representative.

The Travelers Indemnity Company (IND)

The Phoenix Insurance Company (PHX)

The Charter Oak Fire Insurance Company (COF)

Travelers Property Casualty Company of America (TIL)

The Travelers Indemnity Company of Connecticut (TCT)

The Travelers Indemnity Company of America (TIA)

Travelers Casualty Insurance Company of America (ACJ)

Wendy C. Shiba
Secretary

Brian MacLean
President

NAMED INSURED ENDORSEMENT

ITEM 1 NAMED INSURED TO READ:

THE COMMUTER RAIL DIVISION OF THE REGIONAL TRANSPORTATION AUTHORITY, A DIVISION OF AN ILLINOIS MUNICIPAL CORPORATION AND ITS AFFILIATED SEPARATE PUBLIC CORPORATION KNOWN AS THE NORTHEAST ILLINOIS REGIONAL COMMUTER RAILROAD CORPORATION, BOTH OPERATING UNDER THE SERVICE MARK METRA, AS NOW EXISTS OR MAY HEREAFTER BE CONSTITUTED OR ACQUIRED AND THE REGIONAL TRANSPORTATION AUTHORITY, AN ILLINOIS MUNICIPAL CORPORATION AND ANY OTHER RAILROADS OPERATING ON METRA PROPERTY.

GENERAL LIABILITY

003052

TRAVELERS

One Tower Square, Hartford, Connecticut 06183

RAILROAD PROTECTIVE LIABILITY COVERAGE PART DECLARATIONS

POLICY NUMBER: DT-SPS-9D932846-IND-14
ISSUE DATE: 06-02-14

INSURING COMPANY:
THE TRAVELERS INDEMNITY COMPANY

Declarations Period: From 05-20-14 to 05-20-15 12:01 A.M. Standard Time at your mailing address shown in the Common Policy Declarations.

The Railroad Protective Liability Coverage Part consists of these Declarations and the Coverage Form shown below. The Common Policy Conditions do not apply to this Coverage Part.

1. COVERAGE AND LIMITS OF INSURANCE:

RAILROAD PROTECTIVE LIABILITY COVERAGE FORM	LIMITS OF INSURANCE
Aggregate Limit	$ 10,000,000
Each Occurrence Limit	$ 5,000,000

2. AUDIT PERIOD: NONE

3. DESIGNATED CONTRACTOR:

Name LANDMARK CONTRACTORS

Mailing Address 11916 W MAIN STREET
HUNTLEY, IL 60142

4. JOB LOCATION(S):

PARKWAY ENHANCEMENT, STREET LIGHTING, SIDEWALKS, ADA RAMPS, DRAINAGE & CROSSWORKS

PROJECT NUMBER: 13-W4612-07

5. NAME AND ADDRESS OF INVOLVED GOVERNMENTAL AUTHORITY OR OTHER CONTRACTING PARTY:

COOK COUNTY HIGHWAY DEPT
69 W WASHINGTON STREET, SUITE 2260
CHICAGO, IL 60602

6. NUMBERS OF FORMS, SCHEDULES AND ENDORSEMENTS FORMING PART OF THIS COVERAGE PART ARE ATTACHED AS A SEPARATE LISTING.

CG T0 05 04 07

PRODUCER:DS&P INSURANCE SERVICES HG556 OFFICE: EDISON 06H

003053

DECLARATIONS PREMIUM SCHEDULE **POLICY NUMBER:** DT-SPS-9D932846-IND-14

This Schedule applies to the Declarations for the period of 05-20-14 to 05-20-15

It shows all of your known rating classes as of the effective date. Any exceptions will be so noted. This includes all locations you own, rent or occupy.

LOC/BLDG NO.	CLASS DESCRIPT/ CODE NO.	SUBLINE	PREMIUM BASE/ EXPOSURE	RATES	ADVANCE PREMIUM
ST OF IL	RAILROAD PROTECTIVE LIABILITY-OPERATIONS RAILROAD NOC - CONSTRUCTION OPERATIONS - OPERATIONS PERFORMED FOR INTERESTS OTHER THAN RAILROADS/40012	335			5,000

*This class is subject to the prem/ops transition program.

☐ If an "X" is entered in this box, these Declarations are completed on the Premium Schedule Extension CG T0 12.

KEY TO DECLARATIONS PREMIUM SCHEDULE

ABBREVIATIONS:

CLASS DESCRIPT – means CLASS DESCRIPTION

LOC/BLDG NO. – means LOCATION/BUILDING NUMBER

OPN NO. – means OPERATION NUMBER

PREM/OPS – means PREMISES/OPERATIONS

PROD/C-OPS – means PRODUCTS/COMPLETED OPERATIONS

PREMIUM BASE:

Key Letter	Premium Base	How Rates Apply
a	Area	per 1,000 square feet
c	Total Cost	per $1,000 of total cost
m	Admissions	per 1,000 admissions
o	Total Operating Expense	per $1,000 of total operating expenditures
p	Payroll	per $1,000 of payroll
s	Gross Sales	per $1,000 of gross sales
t	(see note* below)	(see note* below)
u	Units	per unit

* Premium base t applies for a number of rarely used premium bases. The specific base and how rates apply are shown with the Class Description on the DECLARATIONS-PREMIUM SCHEDULE.

Copyright, The Travelers Indemnity Company, 2003

TABLE OF CONTENTS

RAILROAD PROTECTIVE LIABILITY COVERAGE FORM CG 00 35 10 01

SECTION I—COVERAGES

Beginning on Page

Coverage A – Bodily Injury and Property Damage Liability
- Insuring Agreement 1
- Exclusions 1

Coverage B – Physical Damage to Property
- Insuring Agreement 2
- Exclusions 2

Supplementary Payments 3

SECTION II—WHO IS AN INSURED 3

SECTION III—LIMITS OF INSURANCE 3

SECTION IV—CONDITIONS 3

Conditions that apply to Coverages A and B 3

- Assignment 3
- Bankruptcy 3
- Cancellation 3
- Changes 4
- Inspections and Surveys 4
- Other Insurance 4
- Premium and Premium Audit 4
- Transfer of Rights of Recovery Against Others To Us 5
- When We Do Not Renew 5

Conditions that apply to Coverage A Only 5

- Legal Action Against Us 5
- Duties In The Event Of Occurrence, Claim or Suit 5
- Separation of Insureds 5

Conditions that apply to Coverage B Only 5

- Appraisal 5
- No Benefit to Bailee 6
- Insured's Duties In The Event Of A Loss 6
- Legal Action Against Us 6
- Payment of Loss 6

SECTION V—DEFINITIONS 6

RAILROAD PROTECTIVE LIABILITY COVERAGE FORM

Various provisions in this policy restrict coverage. Read the entire policy carefully to determine rights, duties and what is and is not covered.

Throughout this policy, the words "you" and "your" refer to the Named Insured shown in the Declarations. The words "we", "us" and "our" refer to the Company providing this insurance.

The word "insured" means any person or organization qualifying as such under Section **II** – Who Is An Insured.

Other words and phrases that appear in quotation marks have special meaning. Refer to Section **V** – Definitions.

SECTION I – COVERAGES

COVERAGE A – BODILY INJURY AND PROPERTY DAMAGE LIABILITY

1. Insuring Agreement

a. We will pay those sums that the insured becomes legally obligated to pay as damages because of "bodily injury" or "property damage" to which this insurance applies. We will have the right and duty to defend the insured against any "suit" seeking those damages. However, we will have no duty to defend the insured against any "suit" seeking damages for "bodily injury" or "property damage" to which this insurance does not apply. We may, at our discretion, investigate any "occurrence" and settle any claim or "suit" that may result. But:

(1) The amount we will pay for damages is limited as described in Section **III** – Limits Of Insurance; and

(2) Our right and duty to defend ends when we have used up the applicable limit of insurance in the payment of judgments or settlements.

No other obligation or liability to pay sums or perform acts or services is covered unless explicitly provided for under Supplementary Payments – Coverage **A**.

b. This insurance applies to "bodily injury" and "property damage" only if:

(1) The "bodily injury" or "property damage" occurs during the policy period; and

(2) The "bodily injury" or "property damage" arises out of acts or omissions at the "job location" which are related to or are in connection with the "work" described in the Declarations.

c. Damages because of "bodily injury" include damages claimed by any person or organization for care, loss of services or death resulting at any time from the "bodily injury".

2. Exclusions

This insurance does not apply to:

a. Expected Or Intended Injury

"Bodily injury" or "property damage" expected or intended from the standpoint of the insured. This exclusion does not apply to "bodily injury" resulting from the use of reasonable force to protect persons or property.

b. Contractual Liability

"Bodily injury" or "property damage" for which the insured is obligated to pay damages by reason of the assumption of liability in a contract or agreement. This exclusion does not apply to liability for damages assumed in a contract or agreement that is a "covered contract".

c. Completed Work

"Bodily injury" or "property damage" occurring after the "work" is completed. The "work" will be deemed completed at the earliest of the following times:

(1) When all the "work" called for in the "contractor's" contract has been completed.

(2) When all the "work" to be done at the "job location" has been completed.

(3) When that part of the "work" done at the "job location" has been put to its intended use by you, the governmental authority or other contracting party.

This exclusion does not apply to "bodily injury" or "property damage" resulting from the existence of or removal of tools, uninstalled equipment or abandoned or unused materials.

d. Acts Or Omissions Of Insured

"Bodily injury" or "property damage", the sole proximate cause of which is an act or omission of any insured other than acts or omis-

© ISO Properties Inc., 2000

sions of any of "your designated employees". This exclusion does not apply to injury or damage sustained at the "job location" by any of "your designated employees" or employee of the "contractor", or by any employee of the governmental authority or any other contracting party (other than you) specified in the Declarations.

e. Workers' Compensation And Similar Laws

Any obligation of the insured under a workers' compensation, disability benefits or unemployment compensation law or any similar law. This exclusion does not apply to any obligation of the insured under the Federal Employers Liability Act, as amended.

f. Pollution

"Bodily injury" or "property damage" arising out of the actual, alleged or threatened discharge, dispersal, seepage, migration, release or escape of "pollutants" at or from the "job location":

(1) Due to the past or present use of the "job location" by you or for you or others for the handling, storage, disposal, processing or treatment of waste; or

(2) Due to the dumping or disposal of waste on the "job location" by the "contractor" with the knowledge of you or any of "your designated employees"; or

(3) On which you or "contractors" working directly or indirectly on any insured's behalf are performing operations if the "pollutants" are brought on or to the "job location" in connection with such operations by you, the "contractor" or "your designated employee". However, this subparagraph does not apply to:

(a) "Bodily injury" or "property damage" arising out of the escape of fuels or lubricants from equipment used at the "job location".

(b) "Bodily injury" or "property damage" arising out of heat, smoke or fumes from a "hostile fire".

(4) On which you or "contractors" working directly or indirectly on any insured's behalf are performing operations if the operations are to test for, monitor, clean up, remove, contain, treat, detoxify or neutralize, or in any way respond to, or assess the effects of, "pollutants".

g. Damage To Owned, Leased Or Entrusted Property

"Property damage" to property owned by you or leased or entrusted to you under a lease or trust agreement.

COVERAGE B – PHYSICAL DAMAGE TO PROPERTY

1. Insuring Agreement

We will pay for "physical damage to property" to which this insurance applies. The "physical damage to property" must occur during the policy period. The "physical damage to property" must arise out of acts or omissions at the "job location" which are related to or in connection with the "work" described in the Declarations. The property must be owned by or leased or entrusted to you under a lease or trust agreement.

2. Exclusions

This insurance does not apply to "physical damage to property":

a. Completed Work

Occurring after the "work" is completed. The "work" will be deemed completed at the earliest of the following times:

(1) When all the "work" called for in the "contractor's" contract has been completed.

(2) When all the "work" to be done at the "job location" has been completed.

(3) When that part of the "work" done at the "job location" has been put to its intended use by you, the governmental authority or other contracting party.

This exclusion does not apply to "physical damage to property" resulting from the existence of tools, uninstalled equipment or abandoned or unused materials.

b. Acts Or Omissions Of Insured

The sole proximate cause of which is an act or omission of any insured other than acts or omissions of any of "your designated employees".

c. Nuclear Incidents Or Conditions

Due to nuclear reaction, nuclear radiation or radioactive contamination or to any related act or condition.

© ISO Properties Inc., 2000

d. Pollution

Due to the discharge, dispersal, seepage, migration, release or escape of "pollutants" excluded under Exclusion f. Pollution, Coverage A.

SUPPLEMENTARY PAYMENTS – COVERAGE A

We will pay, with respect to any claim we investigate or settle, or any "suit" against an insured we defend:

1. All expenses we incur.
2. All costs taxed against the insured in the "suit".
3. All interest on the full amount of any judgment that accrues after entry of the judgment and before we have paid, offered to pay or deposited in court the part of the judgment that is within the applicable limit of insurance.
4. The cost of bonds to release attachments, but only for bond amounts within the applicable limit of insurance. We do not have to furnish these bonds.
5. Expenses incurred by the insured for first aid administered to others at the time of an accident, for "bodily injury" to which this insurance applies.
6. All reasonable expenses, incurred by the insured at our request to assist us in the investigation or defense of the claim or "suit", including actual loss of earnings up to $250 a day because of time off from work.
7. Prejudgment interest awarded against the insured on that part of the judgment we pay. If we make an offer to pay the applicable limit of insurance, we will not pay any prejudgment interest based on that period of time after the offer.

These payments will not reduce the limits of insurance.

SECTION II – WHO IS AN INSURED

1. You are an insured.
2. Your "executive officers" and directors are insureds, but only with respect to their duties as your officers and directors.
3. Your stockholders are insureds, but only with respect to their liability as stockholders.
4. Any railroad operating over your tracks is an insured.

SECTION III – LIMITS OF INSURANCE

1. The Limits of Insurance shown in the Declarations and the rules below fix the most we will pay regardless of the number of:
   a. Insureds;
   b. Claims made or "suits" brought; or
   c. Persons or organizations making claims or bringing "suits".
2. The Aggregate Limit is the most we will pay for the sum of all damages because of all "bodily injury", all "property damage" and all "physical damage to property".
3. Subject to **2.** above, the Each Occurrence Limit is the most we will pay for the sum of all damages because of all "bodily injury", all "property damage" and all "physical damage to property" arising out of any one occurrence.
4. Subject to **3.** above, the payment for "physical damage to property" shall not exceed the lesser of:
   a. The actual cash value of the property at the time of loss; or
   b. The cost to repair or replace the property with other property of like kind or quality.

The Limits of Insurance of this Coverage Part apply separately to each consecutive annual period and to any remaining period of less than 12 months, starting with the beginning of the policy period shown in the Declarations, unless the policy period is extended after issuance for an additional period of less than 12 months. In that case, the additional period will be deemed part of the last preceding period for purposes of determining the Limits of Insurance.

SECTION IV – CONDITIONS

A. The following Conditions apply to Coverages **A** and **B**:

1. Assignment

Assignment of interest under this Coverage Part shall not bind us unless we issue an endorsement consenting to the assignment.

2. Bankruptcy

Bankruptcy or insolvency of the insured or of the insured's estate will not relieve us of our obligations under this Coverage Part.

3. Cancellation

a. You may cancel this policy by mailing or delivering to us advance written notice of cancellation.

b. We may cancel this policy by mailing or delivering to you, the "contractor" and any involved governmental authority or other contracting party designated in the Decla-

© ISO Properties Inc., 2000

003057

rations, at the respective mailing addresses last known to us, written notice of cancellation at least 60 days before the effective date of cancellation.

c. Notice of cancellation will state the effective date of cancellation. The policy period will end on that date.

d. If this policy is cancelled, any unearned premium will be refunded. If we cancel, the refund will be pro rata. If you cancel, the refund may be less than pro rata. The cancellation will be effective even if we have not made or offered a refund.

e. If notice is mailed, proof of mailing will be sufficient proof of notice.

4. Changes

This policy contains all the agreements between you and us concerning the insurance afforded. You are authorized to make changes in the terms of this policy with our consent. This policy's terms can be amended or waived only by endorsement issued by us and made a part of this policy.

5. Inspections And Surveys

1. We have the right to:

   a. Make inspections and surveys at any time;

   b. Give you reports on the conditions we find; and

   c. Recommend changes.

2. We are not obligated to make inspections, surveys, reports or recommendations and any such actions we do undertake relate only to insurability and the premiums to be charged. We do not make safety inspections. We do not undertake to perform the duty of any person or organization to provide for the health or safety of workers or the public. And we do not warrant that conditions:

   a. Are safe or healthful; or

   b. Comply with laws, regulations, codes or standards.

3. Paragraphs **1.** and **2.** of this condition apply not only to us, but also to any rating, advisory, rate service or similar organization which makes insurance inspections, surveys, reports or recommendations.

4. Paragraph **2.** of this condition does not apply to any inspections, surveys, reports or recommendations we may make relative to certification, under state or municipal statutes, ordinances or regulations, of boilers, pressure vessels or elevators.

6. Other Insurance

The insurance afforded by this policy is:

a. Primary insurance and we will not seek contribution from any other insurance available to you except if the other insurance is provided by a contractor other than the designated contractor for the same operation and "job location"; and

b. If the other insurance is available, we will share with that other insurance by the method described below.

   If all of the other insurance permits contribution by equal shares, we will follow this method also. Under this approach, each insurer contributes equal amounts until it has paid its applicable limit of insurance or none of the loss remains, whichever comes first.

   If any of the other insurance does not permit contribution by equal shares, we will contribute by limits. Under this method, each insurer's share is based on the ratio of its applicable limit of insurance to the total applicable limits of insurance of all insurers.

7. Premium And Premium Audit

a. We will compute all premiums for this Coverage Part in accordance with our rules and rates.

b. Contract cost, the premium base shown in the Declarations, means the total cost of the operations described in the Declarations.

c. The premium shown in the Declarations as advance premium is a deposit premium only. At the close of each audit period we will compute the earned premium for that period and send notice to the "contractor" designated in the Declarations. The due date for audit and retrospective premiums is the date shown as the due date on the bill. If the sum of the advance and audit premiums paid for the policy period is greater than the earned

© ISO Properties Inc., 2000

premium, we will return the excess to the contractor designated in the Declarations.

In no event shall the payment of premium be your obligation.

8. Transfer Of Rights Of Recovery Against Others To Us

If the insured has rights to recover all or part of any payment we have made under this policy, those rights are transferred to us. The insured must do nothing after loss to impair them. At our request, the insured will bring "suit" or transfer those rights to us and help us enforce them.

9. When We Do Not Renew

If we decide not to renew this Coverage Part, we will mail or deliver to the first Named Insured shown in the Declarations written notice of the nonrenewal not less than 30 days before the expiration date.

If notice is mailed, proof of mailing will be sufficient proof of notice.

B. The following Conditions apply to Coverage **A** only:

1. Legal Action Against Us

No person or organization has a right under this policy:

a. To join us as a party or otherwise bring us into a "suit" asking for damages from an insured; or

b. To sue us on this policy unless all of its terms have been fully complied with.

A person or organization may sue us to recover on an agreed settlement or on a final judgment against an insured; but we will not be liable for damages that are not payable under the terms of this policy or that are in excess of the applicable limit of insurance. An agreed settlement means a settlement and release of liability signed by us, the insured and the claimant or the claimant's legal representative.

2. Duties In The Event Of Occurrence, Claim Or Suit

a. You must see to it that we are notified as soon as practicable of an occurrence which may result in a claim. To the extent possible, notice should include:

(1) How, when and where the occurrence took place;

(2) The names and addresses of any injured persons and witnesses; and

(3) The nature and location of any injury or damage arising out of the occurrence.

b. If a claim is made or "suit" is brought against any insured, you must:

(1) Immediately record the specifics of the claim or "suit" and the date received; and

(2) Notify us as soon as practicable.

You must see to it that we receive written notice of the claim or "suit" as soon as practicable.

c. You and any other involved insured must:

(1) Immediately send us copies of any demands, notices, summonses or legal papers received in connection with the claim or "suit";

(2) Authorize us to obtain records and other information;

(3) Cooperate with us in the investigation or settlement of the claim or defense against the "suit"; and

(4) Assist us, upon our request, in the enforcement of any right against any person or organization which may be liable to the insured because of injury or damage to which this insurance may also apply.

d. No insured will, except at that insured's own cost, voluntarily make a payment, assume any obligation, or incur any expense, other than for first aid, without our consent.

3. Separation Of Insureds

Except with respect to the Limits of Insurance this insurance applies:

a. As if each Named Insured were the only Named Insured; and

b. Separately to each insured against whom claim is made or "suit" is brought.

C. The following Conditions apply to Coverage **B** only:

1. Appraisal

If you fail to agree with us on the value of the property, or the amount of loss, either you or we may make written demand for an ap-

© ISO Properties Inc., 2000

praisal of the loss within sixty (60) days after proof of loss is filed. In this event, each party will select a competent appraiser. The two appraisers will select a competent and impartial umpire. The appraisers will state separately the value of the property and the amount of loss. If they fail to agree, they will submit their differences to the umpire. A decision agreed to by any two will be binding. Each party will:

a. Pay its chosen appraiser; and

b. Bear the other expenses of the appraisal and umpire equally.

If we submit to an appraisal, we still retain our right to deny the claim.

2. **No Benefit To Bailee**

No person or organization, other than you, having custody of the property will benefit from this insurance.

3. **Insured's Duties In The Event Of A Loss**

You must:

a. Protect the property, whether or not the loss is covered by this policy. Any further loss due to your failure to protect the property shall not be recoverable under this policy. Reasonable expenses incurred in affording such protection shall be deemed to be incurred at our request; and

b. Submit to us, as soon after the loss as possible, your sworn proof of loss containing the information we request to settle the loss and, at our request, make available the damaged property for examination.

4. **Legal Action Against Us**

No person or organization has a right under this policy to sue us on this policy unless all of its terms have been fully complied with and until 30 days after proof of loss is filed and the amount of loss is determined as provided in this policy.

5. **Payment Of Loss**

We may pay for the loss in money, but there can be no abandonment of any property to us.

SECTION V – DEFINITIONS

1. "Auto" means a land motor vehicle, trailer or semitrailer designed for travel on public roads, including any attached machinery or equipment. But "auto" does not include "mobile equipment".

2. "Bodily injury" means bodily injury, sickness or disease sustained by a person, including death resulting from any of these at any time.

3. "Contractor" means the contractor designated in the Declarations and includes all subcontractors working directly or indirectly for that "contractor" but does not include you.

4. "Covered contract" means any contract or agreement to carry a person or property for a charge or any interchange contract or agreement respecting motive power, or rolling stock equipment.

5. "Executive officer" means a person holding any of the officer positions created by your charter, constitution, by-laws or any other similar governing document.

6. "Hostile fire" means one which becomes uncontrollable or breaks out from where it was intended to be.

7. "Job location" means the job location designated in the Declarations including any area directly related to the "work" designated in the Declarations. "Job location" includes the ways next to it.

8. "Mobile equipment" means any of the following types of land vehicles, including any attached machinery or equipment:

a. Bulldozers, farm machinery, forklifts and other vehicles designed for use principally off public roads;

b. Vehicles maintained for use solely on or next to premises you own or rent;

c. Vehicles that travel on crawler treads;

d. Vehicles, whether self-propelled or not, maintained primarily to provide mobility to permanently mounted:

(1) Power cranes, shovels, loaders, diggers or drills; or

(2) Road construction or resurfacing equipment such as graders, scrapers or rollers;

e. Vehicles not described in **a.**, **b.**, **c.** or **d.** above that are not self-propelled and are maintained primarily to provide mobility to permanently attached equipment of the following types:

(1) Air compressors, pumps and generators, including spraying, welding, building cleaning, geophysical exploration, lighting and well servicing equipment; or

© ISO Properties Inc., 2000

(2) Cherry pickers and similar devices used to raise or lower workers;

f. Vehicles not described in **a.**, **b.**, **c.** or **d.** above maintained primarily for purposes other than the transportation of persons or cargo.

However, self-propelled vehicles with the following types of permanently attached equipment are not "mobile equipment" but will be considered "autos":

(1) Equipment designed primarily for:

(a) Snow removal;

(b) Road maintenance, but not construction or resurfacing; or

(c) Street cleaning;

(2) Cherry pickers and similar devices mounted on automobile or truck chassis and used to raise or lower workers; and

(3) Air compressors, pumps and generators, including spraying, welding, building cleaning, geophysical exploration, lighting and well servicing equipment.

9. "Physical damage to property" means direct and accidental loss of or damage to rolling stock and their contents, mechanical construction equipment or motive power equipment, railroad tracks, roadbeds, catenaries, signals, bridges or buildings.

10. "Pollutants" means any solid, liquid, gaseous or thermal irritant or contaminant, including smoke, vapor, soot, fumes, acids, alkalis, chemicals and waste. Waste includes material to be recycled, reconditioned or reclaimed.

11. "Property damage" means:

a. Physical injury to tangible property, including all resulting loss of use of that property. All such loss of use shall be deemed to occur at the time of the physical injury that caused it; or

b. Loss of use of tangible property that is not physically injured. All such loss of use shall be deemed to occur at the time of the occurrence that caused it.

12. "Suit" means a civil proceeding in which damages because of "bodily injury" or "property damage" to which this insurance applies are alleged. "Suit" includes:

a. An arbitration proceeding in which such damages are claimed and to which the insured must submit or does submit with our consent; or

b. Any other alternative dispute resolution proceeding in which such damages are claimed and to which the insured submits with our consent.

13. "Work" means work or operations performed by the "contractor" including materials, parts or equipment furnished in connection with the work or operations.

14. "Your designated employee" means:

a. Any supervisory employee of yours at the "job location";

b. Any employee of yours while operating, attached to or engaged on work trains or other railroad equipment at the "job location" which are assigned exclusively to the "contractor"; or

c. Any employee of yours not described in **a.** or **b.** above who is specifically loaned or assigned to the work of the "contractor" for the prevention of accidents or protection of property.

© ISO Properties Inc., 2000

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

CAP ON LOSSES FROM CERTIFIED ACTS OF TERRORISM

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
LIQUOR LIABILITY COVERAGE PART
OWNERS AND CONTRACTORS PROTECTIVE LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
UNDERGROUND STORAGE TANK POLICY

If aggregate insured losses attributable to terrorist acts certified under the federal Terrorism Risk Insurance Act exceed $100 billion in a Program Year (January 1 through December 31) and we have met our insurer deductible under the Terrorism Risk Insurance Act, we shall not be liable for the payment of any portion of the amount of such losses that exceeds $100 billion, and in such case insured losses up to that amount are subject to pro rata allocation in accordance with procedures established by the Secretary of the Treasury.

"Certified act of terrorism" means an act that is certified by the Secretary of the Treasury, in concurrence with the Secretary of State and the Attorney General of the United States, to be an act of terrorism pursuant to the federal Terrorism Risk Insurance Act. The criteria contained in the Terrorism Risk Insurance Act for a "certified act of terrorism" include the following:

1. The act resulted in insured losses in excess of $5 million in the aggregate, attributable to all types of insurance subject to the Terrorism Risk Insurance Act; and
2. The act is a violent act or an act that is dangerous to human life, property or infrastructure and is committed by an individual or individuals as part of an effort to coerce the civilian population of the United States or to influence the policy or affect the conduct of the United States Government by coercion.

© ISO Properties, Inc., 2007

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

EXCLUSION – SILICA

This endorsement modifies insurance provided under the following:

OWNERS AND CONTRACTORS PROTECTIVE LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
SPECIAL PROTECTIVE AND HIGHWAY LIABILITY POLICY –
NEW YORK DEPARTMENT OF TRANSPORTATION

This insurance does not apply to "bodily injury" or "property damage" arising out of or in any way related to the actual, alleged or threatened discharge, dispersal, emission, release, escape, handling, contact with, exposure to or inhalation or respiration of silica or products or substances containing silica. This includes, but is not limited to:

a. Any supervision, instructions, recommendations, warnings or advice given or which should have been given in connection with the above; and

b. Any obligation to share damages with or repay someone else who must pay damages because of such injury or damage.

 Copyright 2005 The St.Paul Travelers Companies, Inc. All rights reserved.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

EXCLUSION – LEAD

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
OWNERS AND CONTRACTORS LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
CATASTROPHE UMBRELLA POLICY

PROVISIONS

This insurance does not apply to any injury, damage, loss, cost, payment or expense, including, but not limited to, defense and investigation, of any kind arising out of, resulting from, caused by or contributed to by the actual or alleged presence or actual, alleged or threatened dispersal, release, ingestion, inhalation or absorption of lead, lead compounds or lead which is or was contained or incorporated into any material or substance. This exclusion applies, but is not limited to:

1. Any supervision, instructions, recommendations, warnings or advice given in connection with the above;
2. Any obligation to share damages, losses, costs, payments or expenses with or repay someone else who must make payment because of such injury or damage, loss, cost, payment or expense; or
3. Any request, order or requirement to abate, mitigate, remediate, contain, remove or dispose of lead, lead compounds or materials or substances containing lead.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

EXCLUSION – ASBESTOS

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
OWNERS AND CONTRACTORS PROTECTIVE LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
CATASTROPHE UMBRELLA POLICY

This insurance does not apply to "bodily injury," "property damage," "personal injury" or "advertising injury" arising out of the actual or alleged presence or actual, alleged or threatened dispersal of asbestos, asbestos fibers or products containing asbestos, provided that the injury or damage is caused or contributed to by the hazardous properties of asbestos. This includes:

a. Any supervision, instructions, recommendations, warnings or advice given or which should have been given in connection with the above; and

b. Any obligation to share damages with or repay someone else who must pay damages because of such injury or damage.

Copyright, The Travelers Indemnity Company.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ILLINOIS CHANGES – CANCELLATION AND NONRENEWAL

This endorsement modifies insurance provided under the following:

RAILROAD PROTECTIVE LIABILITY COVERAGE PART

A. Cancellation (Section **IV 3.**) is replaced by the following:

1. Cancellation

a. You may cancel this policy by mailing to us advance written notice of cancellation.

b. We may cancel this policy by mailing written notice stating the reason for cancellation. If we cancel:

(1) For nonpayment of premium, we will mail the notice at least 10 days prior to the effective date of cancellation.

(2) For a reason other than nonpayment of premium, we will mail the notice at least 60 days prior to the effective date of cancellation.

c. If this policy has been in effect for more than 60 days, we may cancel only for one or more of the following reasons:

(1) Nonpayment of premium;

(2) The policy was obtained through a material misrepresentation;

(3) Any insured has violated any of the terms and conditions of the policy;

(4) The risk originally accepted has measurably increased;

(5) Certification to the Director of Insurance of the loss of reinsurance by the insurer that provided coverage to us for all or a substantial part of the underlying risk insured; or

(6) A determination by the Director of Insurance that the continuation of the policy could place us in violation of the insurance laws of this state.

d. We will mail our notice to you, your agent or broker, the "contractor", and any involved government authorities or other contracting parties designated in the declarations, at the respective addresses last known to us.

e. Notice of cancellation will state the effective date of cancellation. The policy period will end on that date.

f. If this policy is cancelled, any unearned premium will be refunded. If we cancel, the refund will be pro rata. If you cancel, the refund may be less than pro rata. The cancellation will be effective even if we have not made or offered a refund.

g. If notice is mailed, proof of mailing will be sufficient proof of notice.

B. The following is added and supersedes any provision to the contrary:

NONRENEWAL

If we decide not to renew or continue this policy, we will mail you and your agent or broker, the "contractor", and any involved government authority, written notice, stating the reason for nonrenewal, at least 60 days before the end of the policy period. If we offer to renew or continue and you do not accept, this policy will terminate at the end of the current policy period. Failure to pay the required renewal or continuation premium when due shall mean that you have not accepted our offer.

If we fail to mail proper written notice of nonrenewal and you obtain other insurance, this policy will end on the effective date of that insurance.

C. Mailing Of Notices

We will mail cancellation and nonrenewal notices to the last addresses known to us. Proof of mailing will be sufficient proof of notice.

© ISO Properties, Inc., 2004

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

WAR LIABILITY EXCLUSION

This endorsement modifies insurance provided under the following:

LIQUOR LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
UNDERGROUND STORAGE TANK POLICY

The following exclusion is added:

This insurance does not apply to:

WAR

Injury or damage, however caused, arising, directly or indirectly, out of:

a. War, including undeclared or civil war; or

b. Warlike action by a military force, including action in hindering or defending against an actual or expected attack, by any government, sovereign or other authority using military personnel or other agents; or

c. Insurrection, rebellion, revolution, usurped power, or action taken by governmental authority in hindering or defending against any of these.

© ISO Properties, Inc., 2002

INTERLINE ENDORSEMENTS

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

FEDERAL TERRORISM RISK INSURANCE ACT DISCLOSURE

This endorsement applies to the insurance provided under the following:

COMMERCIAL EXCESS LIABILITY (UMBRELLA) INSURANCE
COMMERCIAL GENERAL LIABILITY COVERAGE PART
CYBERFIRST LIABILITY COVERAGE
ELECTRONIC MANUFACTURERS AND COMPUTER SERVICES ERRORS AND OMISSIONS LIABILITY COVERAGE FORM
EMPLOYEE BENEFITS LIABILITY COVERAGE PART
EMPLOYMENT-RELATED PRACTICES LIABILITY COVERAGE PART
ENVIRONMENTAL HAZARD POLICY
EXCESS (FOLLOWING FORM) LIABILITY INSURANCE
LAW ENFORCEMENT LIABILITY COVERAGE PART
LIMITED ABOVE GROUND POLLUTION LIABILITY COVERAGE PART
LIQUOR LIABILITY COVERAGE PART
MEDFIRST PRODUCTS/COMPLETED OPERATIONS, ERRORS AND OMISSIONS, AND INFORMATION SECURITY LIABILITY COVERAGE FORM
OWNERS AND CONTRACTORS PROTECTIVE LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
PUBLIC ENTITY MANAGEMENT LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
SELF-INSURED EXCESS COMMERCIAL GENERAL LIABILITY COVERAGE FORM
SELF-INSURED EXCESS LIQUOR LIABILITY COVERAGE FORM
SELF-INSURED EXCESS EMPLOYEE BENEFITS LIABILITY COVERAGE FORM
SELF-INSURED EXCESS PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE FORM
SPECIAL PROTECTIVE AND HIGHWAY LIABILITY POLICY – NEW YORK DEPARTMENT OF TRANSPORTATION
TRIBAL BUSINESS MANAGEMENT LIABILITY COVERAGE

PROVISIONS

On December 26, 2007, the President of the United States signed into law amendments to the Terrorism Risk Insurance Act of 2002 (the "Act"), which, among other things, extend the Act and expand its scope. The Act establishes a program under which the Federal Government may partially reimburse "Insured Losses" (as defined in the Act) caused by "acts of terrorism". An "act of terrorism" is defined in Section 102(I) of the Act to mean any act that is certified by the Secretary of the Treasury – in concurrence with the Secretary of State and the Attorney General of the United States – to be an act of terrorism; to be a violent act or an act that is dangerous to human life, property, or infrastructure; to have resulted in damage within the United States, or outside the United States in the case of certain air carriers or vessels or the premises of a United States Mission; and to have been committed by an individual or individuals as part of an effort to coerce the civilian population of the United States or to influence the policy or affect the conduct of the United States Government by coercion.

The Federal Government's share of compensation for Insured Losses is 85% of the amount of Insured Losses in excess of each Insurer's statutorily established deductible, subject to the "Program Trigger", (as defined in the Act). In no event, however, will the federal government or any Insurer be required to pay any portion of the amount of aggregate Insured Losses occurring in any one year that exceeds $100,000,000,000, provided that such Insurer has met its deductible. If aggregate Insured Losses exceed $100,000,000,000 in any one year, your coverage may therefore be reduced.

The charge for Insured Losses for each Coverage Part is included in the Coverage Part premium. The charge that has been included for each Coverage Part is indicated below, and does not include any charge for the portion of losses covered by the Federal Government under the Act.

- **1% of each applicable Commercial Liability Coverage premium.**

© 2010 The Travelers Indemnity Company

003084

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

NUCLEAR ENERGY LIABILITY EXCLUSION ENDORSEMENT

(Broad Form)

This endorsement modifies insurance provided under the following:

COMMERCIAL AUTOMOBILE COVERAGE PART
COMMERCIAL GENERAL LIABILITY COVERAGE PART
FARM COVERAGE PART
LIQUOR LIABILITY COVERAGE PART
MEDICAL PROFESSIONAL LIABILITY COVERAGE PART
OWNERS AND CONTRACTORS PROTECTIVE LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
UNDERGROUND STORAGE TANK POLICY

1. The insurance does not apply:

A. Under any Liability Coverage, to "bodily injury" or "property damage":

(1) With respect to which an "insured" under the policy is also an insured under a nuclear energy liability policy issued by Nuclear Energy Liability Insurance Association, Mutual Atomic Energy Liability Underwriters, Nuclear Insurance Association of Canada or any of their successors, or would be an insured under any such policy but for its termination upon exhaustion of its limit of liability; or

(2) Resulting from the "hazardous properties" of "nuclear material" and with respect to which **(a)** any person or organization is required to maintain financial protection pursuant to the Atomic Energy Act of 1954, or any law amendatory thereof, or **(b)** the "insured" is, or had this policy not been issued would be, entitled to indemnity from the United States of America, or any agency thereof, under any agreement entered into by the United States of America, or any agency thereof, with any person or organization.

B. Under any Medical Payments coverage, to expenses incurred with respect to "bodily injury" resulting from the "hazardous properties" of "nuclear material" and arising out of the operation of a "nuclear facility" by any person or organization.

C. Under any Liability Coverage, to "bodily injury" or "property damage" resulting from "hazardous properties" of "nuclear material", if:

(1) The "nuclear material" **(a)** is at any "nuclear facility" owned by, or operated by or on behalf of, an "insured" or **(b)** has been discharged or dispersed therefrom;

(2) The "nuclear material" is contained in "spent fuel" or "waste" at any time possessed, handled, used, processed, stored, transported or disposed of, by or on behalf of an "insured"; or

(3) The "bodily injury" or "property damage" arises out of the furnishing by an "insured" of services, materials, parts or equipment in connection with the planning, construction, maintenance, operation or use of any "nuclear facility", but if such facility is located within the United States of America, its territories or possessions or Canada, this exclusion **(3)** applies only to "property damage" to such "nuclear facility" and any property thereat.

2. As used in this endorsement:

"Hazardous properties" includes radioactive, toxic or explosive properties.

"Nuclear material" means "source material", "special nuclear material" or "by-product material".

"Source material", "special nuclear material", and "by-product material" have the meanings given them in the Atomic Energy Act of 1954 or in any law amendatory thereof.

"Spent fuel" means any fuel element or fuel component, solid or liquid, which has been used or exposed to radiation in a "nuclear reactor".

© ISO Properties, Inc., 2007

003085

"Waste" means any waste material **(a)** containing "by-product material" other than the tailings or wastes produced by the extraction or concentration of uranium or thorium from any ore processed primarily for its "source material" content, and **(b)** resulting from the operation by any person or organization of any "nuclear facility" included under the first two paragraphs of the definition of "nuclear facility".

"Nuclear facility" means:

(a) Any "nuclear reactor";

(b) Any equipment or device designed or used for **(1)** separating the isotopes of uranium or plutonium, **(2)** processing or utilizing "spent fuel", or **(3)** handling, processing or packaging "waste";

(c) Any equipment or device used for the processing, fabricating or alloying of "special nuclear material" if at any time the total amount of such material in the custody of the "insured" at the premises where such equipment or device is located consists of or contains more than 25 grams of plutonium or uranium 233 or any combination thereof, or more than 250 grams of uranium 235;

(d) Any structure, basin, excavation, premises or place prepared or used for the storage or disposal of "waste";

and includes the site on which any of the foregoing is located, all operations conducted on such site and all premises used for such operations.

"Nuclear reactor" means any apparatus designed or used to sustain nuclear fission in a self-supporting chain reaction or to contain a critical mass of fissionable material.

"Property damage" includes all forms of radioactive contamination of property.

© ISO Properties, Inc., 2007

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ILLINOIS CHANGES – DEFENSE COSTS

This endorsement modifies insurance provided under the following:

COMMERCIAL AUTOMOBILE COVERAGE PART
COMMERCIAL GENERAL LIABILITY COVERAGE PART
COMMERCIAL LIABILITY UMBRELLA COVERAGE PART
COMMERCIAL PROPERTY COVERAGE PART – LEGAL LIABILITY COVERAGE FORM
COMMERCIAL PROPERTY COVERAGE PART – MORTGAGEHOLDERS ERRORS AND OMISSIONS COVERAGE FORM
EMPLOYMENT-RELATED PRACTICES LIABILITY COVERAGE PART
FARM COVERAGE PART
FARM UMBRELLA LIABILITY POLICY
LIQUOR LIABILITY COVERAGE PART
MEDICAL PROFESSIONAL LIABILITY COVERAGE PART
OWNERS AND CONTRACTORS PROTECTIVE LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
PRODUCT WITHDRAWAL COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
UNDERGROUND STORAGE TANK COVERAGE PART

A. The provisions of Paragraph **B.** are added to all Insuring Agreements that set forth a duty to defend under:

1. Section **I** of the Commercial General Liability, Commercial Liability Umbrella, Employment-Related Practices Liability, Farm, Liquor Liability, Owners And Contractors Protective Liability, Pollution Liability, Products/Completed Operations Liability, Product Withdrawal, Medical Professional Liability, Railroad Protective Liability, Underground Storage Tank Coverage Parts and the Farm Umbrella Liability Policy;
2. Section **II** – Liability Coverage in Paragraph **A.** Coverage under the Business Auto, Garage, Motor Carrier and Truckers Coverage Forms;
3. Section **A.** Coverage under the Legal Liability Coverage Form; and
4. Coverage **C** – Mortgageholder's Liability under the Mortgageholders Errors And Omissions Coverage Form.

B. If we initially defend an insured ("insured") or pay for an insured's ("insured's") defense but later determine that the claim(s) is (are) not covered under this insurance, we will have the right to reimbursement for the defense costs we have incurred.

The right to reimbursement for the defense costs under this provision will only apply to defense costs we have incurred after we notify you in writing that there may not be coverage, and that we are reserving our rights to terminate the defense and seek reimbursement for defense costs.

© ISO Properties, Inc., 2007

003066

POLICYHOLDER NOTICES

IMPORTANT NOTICE – INDEPENDENT AGENT AND BROKER COMPENSATION

NO COVERAGE IS PROVIDED BY THIS NOTICE. THIS NOTICE DOES NOT AMEND ANY PROVISION OF YOUR POLICY. YOU SHOULD REVIEW YOUR ENTIRE POLICY CAREFULLY FOR COMPLETE INFORMATION ON THE COVERAGES PROVIDED AND TO DETERMINE YOUR RIGHTS AND DUTIES UNDER YOUR POLICY. PLEASE CONTACT YOUR AGENT OR BROKER IF YOU HAVE ANY QUESTIONS ABOUT THIS NOTICE OR ITS CONTENTS. IF THERE IS ANY CONFLICT BETWEEN YOUR POLICY AND THIS NOTICE, THE PROVISIONS OF YOUR POLICY PREVAIL.

For information about how Travelers compensates independent agents and brokers, please visit www.travelers.com, call our toll-free telephone number 1-866-904-8348, or request a written copy from Marketing at One Tower Square, 2GSA, Hartford, CT 06183.

IMPORTANT NOTICE – COMPLAINTS – ILLINOIS

NO COVERAGE IS PROVIDED BY THIS NOTICE. THIS NOTICE DOES NOT AMEND ANY PROVISION OF YOUR POLICY. YOU SHOULD REVIEW YOUR ENTIRE POLICY CAREFULLY FOR COMPLETE INFORMATION ON THE COVERAGES PROVIDED AND TO DETERMINE YOUR RIGHTS AND DUTIES UNDER YOUR POLICY. PLEASE CONTACT YOUR AGENT OR BROKER IF YOU HAVE ANY QUESTIONS ABOUT THIS NOTICE OR ITS CONTENTS. IF THERE IS ANY CONFLICT BETWEEN YOUR POLICY AND THIS NOTICE, THE PROVISIONS OF YOUR POLICY PREVAIL.

If you are having problems you may contact your insurance agent directly or you may contact the company at:

Mail: Consumer Affairs
One Tower Square
Hartford, CT 06183

Phone: (860) 277-1561 or

Email: consumeraffairs@travelers.com

The address of the consumer complaint division of the Illinois Department of Insurance is:

Illinois Department of Insurance
Consumer Division
320 W Washington St
Springfield, IL 62767

Complaints may also be filed electronically to the Illinois Department of Insurance at https://insurance.illinois.gov/applications/ComplaintForms/default.aspx

© 2012 The Travelers Indemnity Company. All rights reserved.

IMPORTANT NOTICE – RELIGIOUS FREEDOM PROTECTION AND CIVIL UNION ACT – ILLINOIS

NO COVERAGE IS PROVIDED BY THIS NOTICE. THIS NOTICE DOES NOT AMEND ANY PROVISION OF YOUR POLICY. YOU SHOULD REVIEW YOUR ENTIRE POLICY CAREFULLY FOR COMPLETE INFORMATION ON THE COVERAGES PROVIDED AND TO DETERMINE YOUR RIGHTS AND DUTIES UNDER YOUR POLICY. PLEASE CONTACT YOUR AGENT OR BROKER IF YOU HAVE ANY QUESTIONS ABOUT THIS NOTICE OR ITS CONTENTS. IF THERE IS ANY CONFLICT BETWEEN YOUR POLICY AND THIS NOTICE, THE PROVISIONS OF YOUR POLICY PREVAIL.

The Illinois Religious Freedom Protection and Civil Union Act provides that persons of the same or opposite sex who enter into a civil union must be afforded the same obligations, protections, and legal rights as married persons. This law became effective June 1, 2011, and is designed to ensure that civil unions and marriage are treated identically under Illinois law. In accordance with law, this policy will be interpreted to provide the same benefits and protections to persons in a civil union or in a marriage.

Includes copyrighted material of Insurance Services Office, Inc. with its permission.

TRAVELERS

POLICYHOLDER NOTICE – LEAD

Dear Policyholder:

Lead has become a difficult problem for society as a whole and the insurance industry in particular.

As a consequence, we are attaching a lead exclusion to our liability policies based upon age and occupancy of buildings. Your policy contains this exclusion.

If you have questions about your insurance program, please contact your agent or local Company representative.

IMPORTANT NOTICE TO POLICYHOLDERS

EXCLUSION – SILICA
(CG D3 58)
(CG F4 14)
(CG F4 53)

NO COVERAGE IS PROVIDED BY THIS SUMMARY NOR CAN IT BE CONSTRUED TO REPLACE ANY PROVISIONS IN YOUR POLICY. YOU SHOULD READ YOUR POLICY TO DETERMINE YOUR RIGHTS, DUTIES AND WHAT IS AND IS NOT COVERED. If there is any conflict between the policy and this summary, THE PROVISIONS OF THE POLICY SHALL PREVAIL.

PLEASE READ THIS NOTICE CAREFULLY.

We are now attaching a silica exclusion to selected Owners and Contractors Protective Liability, Products/Completed Operations Liability, Railroad Protective Liability and Special Protective and Highway Liability New York Department of Transportation policies. This notice is intended to make you aware that this exclusion is being added to your policy.

If you have any questions about your insurance program, please contact your agent or local Company representative.